

## PLUS - Static Preparation 1800 mm Sink Unit with 2 Bowls with Shelf - Left Drain

ITEM #		
MODEL #		
NAME #		
-		
SIS #		
AIA #		



134130 (GLR2SSPELS)

Sink unit for dishwasher with 2 bowls, left-hand drainer and lower shelf, 1800mm

# **Short Form Specification**

#### Item No.

Enhanced stability and solid construction thanks to the welded frame and legs. The 50mm high worktop in 304 AISI stainless steel, with Scotch Brite finishing 10/10 mm in thickness, has antidrip edges, welded corners and overflow rim along the top. 2 welded and polish sink bowls in 304 AISI stainless steel supplied with overflow pipe and 2" drain hole. Upstand h=100mm with 10mm radius corner covered on the back with AISI 304 stainless steel spot welded profile. Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel. 40 mmthick lower welded shelf in AISI 304 stainless steel slots easily into place at a height of 200 mm from the floor (compulsory toinstall the chest of drawers). Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel.

### **Main Features**

- Enhanced stability and solid construction. Stability, loading and stress tests by external certified body.
- Product range suitable for international tenders requirements for intense usage installations.

#### Construction

- Welded frame and legs.
- Worktop with 50mm high profile, is in stainless steel Scotch Brite finishing, 10/10 in thickness with anti-drip edges and welded corners and overflow rim along the top.
- Constructed entirely in 304 AISI stainless steel.
- Sink bowl is sound-deadened, in polish stainless steel overflow pipe and 2" drain hole.
- Drainers are sound-deadened with stainless steel reinforcement bars.
- Upstand back completely covered with Stainless Steel welded profile.
- Square section legs (40x40mm, 10/10 in thickness) and height-adjustable feet (-20/+30mm).
- Lower shelf has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement welded to legs for further structure reinforcement.
- Accessories:-set of castors as alternative to the feet, can be fitted as optional.

### **Optional Accessories**


<ul> <li>Double plastic drain syphon 2</li> <li>" for sinks</li> </ul>	PNC 850022 □
<ul> <li>Drawer for 1/1GN container, 400mm</li> </ul>	PNC 855201 □
<ul> <li>Drawer 600X650X150mm</li> </ul>	PNC 855202 🗆
<ul> <li>Chest of 4 drawers for 1/1G, 400mm</li> </ul>	PNC 855203 □
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 855309 🗖
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 855376 🖵
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 855377 🖵
• - NOTTRANSLATED -	PNC 855379 🗖
<ul><li>Single plastic drain syphon 2</li><li>" for sinks</li></ul>	PNC 895313 🗖

#### APPROVAL:





# PLUS - Static Preparation 1800 mm Sink Unit with 2 Bowls with Shelf - Left Drain

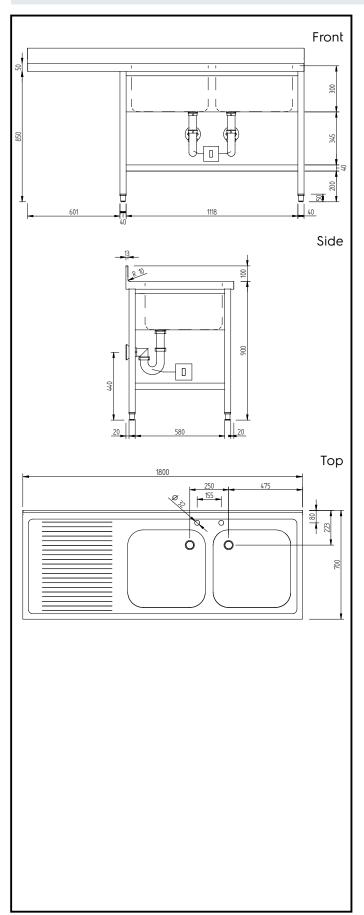

## **Key Information:**

External dimensions, Width:

134130 (GLR2SSPELS)1800 mmExternal dimensions, Depth:700 mmExternal dimensions, Height:1000 mmUpstand Dimensions, Depth:13 mmUpstand Dimensions, Radius:R=10

Bowls number 2

Bowl dimensions 500x500xH300

Worktop thickness: 50 mm
Net weight: 48 kg