

## Food slicers 250 mm Gravity Slicer, belt transmission

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**601130 (MSG25B)**

Gravity slicer 250mm, belt  
transmission (230V; 1+N; 50)

### Short Form Specification

**Item No.** \_\_\_\_\_

Medium duty slicer for Hotel and Catering  
 Base and main components in high polished satin finished  
 anodized aluminium for long lasting, hygiene and ease of  
 cleaning. The blade is in hollow ground hard chrome with blade  
 guard ring for added protection. Model equipped with cut  
 thickness adjusting knob, top mounted sharpener, cover blade  
 and product deflector - easily removable for cleaning. Ventilated  
 blade drive motor. Poly V-belt drive system for quiet operation  
 and economical service. Removable carriage system  
 permanently lubricated with automatic clutch. IP42 water  
 protection.  
 Supplied with blade removal tool.

### Main Features

- Manual gravity slicer.
- Slice thickness from 0 to 15 mm.
- Cut thickness-adjusting knob (millimeter adjustment).
- Belt driven transmission.
- Ventilated blade drive motor designed for continuous use, with Poly V-belt drive system for quiet operation and economical service.
- Removable carriage system permanently lubricated with automatic clutch.
- Top-mounted stone blade sharpener and cover blade easy to remove.
- Supplied with blade removal tool.
- Highest degree of safety in functioning, cleaning and maintenance.
- Cutting capacity for 250 mm model:
  - square: 160x160
  - rectangular: 220x145
  - round: 170

### Construction

- Compact design.
- Made in high polished satin finished anodized aluminium. This procedure guarantees high hygienic standards of the parts interested by the cut and resistance to acids, salts and oxidation processes.
- The blade is made of hollow ground hard chrome with blade guard ring for added protection.
- Plexiglass safety hand guard as standard.
- IP42 water protection.



**APPROVAL:** \_\_\_\_\_

**Electric**

Supply voltage:	230 V/1N ph/50 Hz
Total Watts:	0.19 kW

**Key Information:**

External dimensions, Width:	510 mm
External dimensions, Depth:	420 mm
External dimensions, Height:	370 mm
Net weight (kg):	22

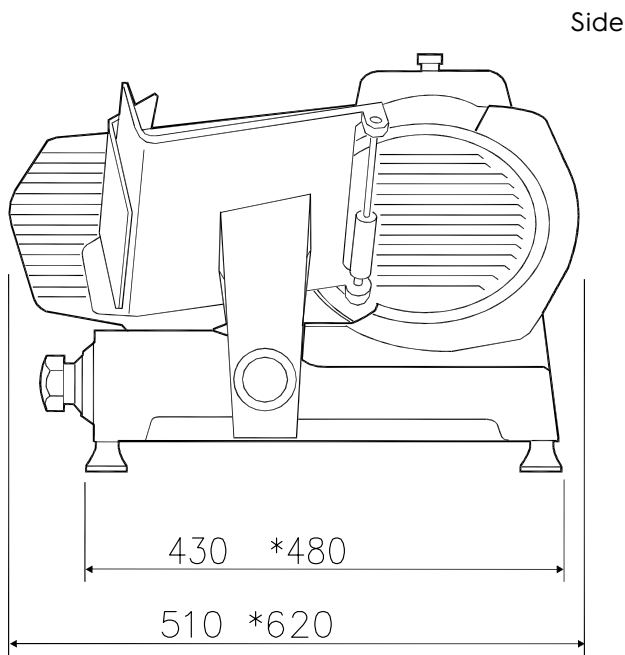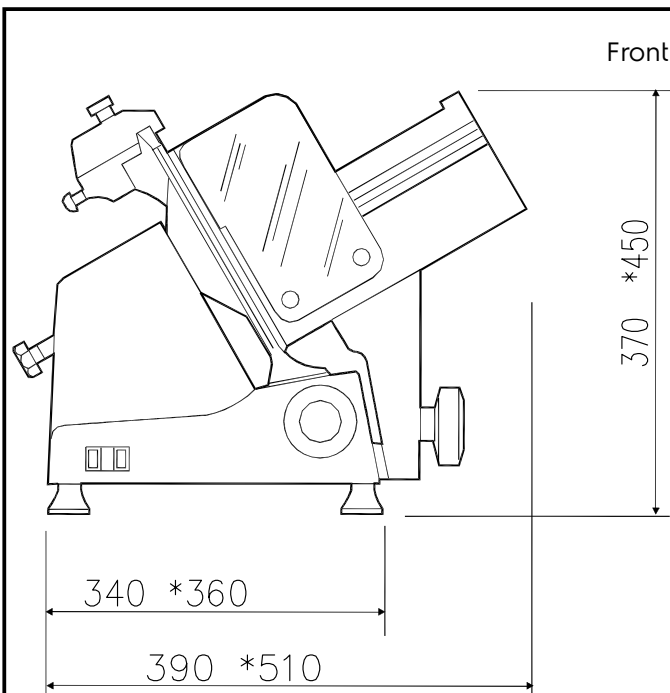

EI = Electrical inlet (power)