



Electrolux
PROFESSIONAL

Stainless Steel Preparation 373x1606 mm Aluminum Linear Units

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



137019 (ALS1606)

Linear shelving set with
aluminium side uprights and
4 polyethylene louvered
shelves, 1680 Kg load,
373x1606 mm

Short Form Specification

Item No. _____

For linear installation. 4-level shelving set with louvered sectional polyethylene shelves (depth=373mm). Aluminium (20 micron) side uprights (height=1700mm). Adjustable feet. For linear installation. 4-level shelving set with louvered sectional polyethylene shelves (depth=373mm). Aluminium (20 micron) side uprights (height=1700mm). Adjustable feet.

Main Features

- Complete shelving system allows rapid and easy fixing of the shelves to the uprights.
- GN 1/1, GN 1/2 and GN 1/3 can be inserted into the frame.

Construction

- Uprights and shelf frames constructed entirely in anodized aluminium (20 micron).
- Shelves made by section of polyethylene tablets.
- Sectional polyethylene shelves are dishwasher safe.
- 8 tiers.

Optional Accessories


- Polyethylene shelf with aluminium frame, 373x708mm PNC 850035 ☐
- Polyethylene shelf with aluminium frame, 373x798mm PNC 850038 ☐
- Angle joint for shelves (depth=373mm) PNC 850070 ☐
- 2 swivelling wheels, 100mm PNC 850072 ☐
- 2 swivelling wheels with brakes, 100mm PNC 850073 ☐

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com
professional@electrolux.com

Front

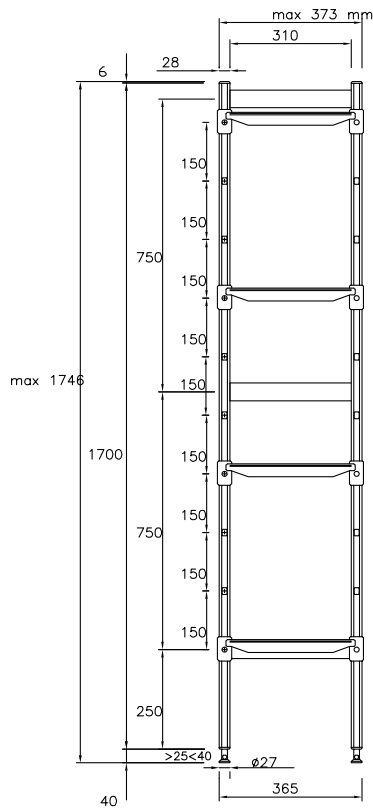

Top

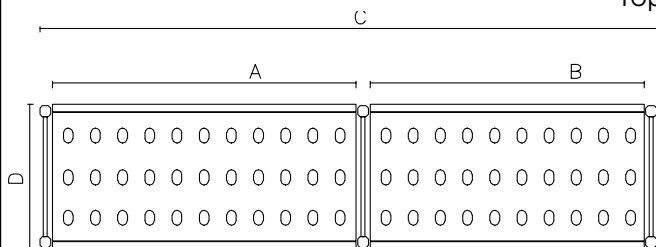

Other

| | A mm | B mm | C mm | D mm |
|--------|------|------|------|------|
| 137019 | 708 | 798 | 1606 | 373 |
| 137020 | 798 | 798 | 1696 | 373 |
| 137021 | 798 | 886 | 1784 | 373 |
| 137022 | 886 | 886 | 1872 | 373 |
| 137023 | 886 | 974 | 1960 | 373 |
| 137024 | 974 | 974 | 2048 | 373 |
| 137025 | 1062 | 1062 | 2224 | 373 |
| 137026 | 1152 | 1152 | 2404 | 373 |
| 137027 | 1240 | 1240 | 2580 | 373 |
| 137028 | 1330 | 1330 | 2760 | 373 |
| 137029 | 1330 | 1505 | 2935 | 373 |

Key Information:

External dimensions, Width:

137019 (ALS1606) 1606 mm

External dimensions, Depth: 373 mm

External dimensions, Height: 1700 mm

Max loading weight: 1000;1040 kg

Net weight: 29 kg