



Modular Cooking Range Line 700XP One Well Electric Fryer Top 7 liter

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



371075 (E7FRED1B00)

7-lt electric fryer top with 1 "V" shape well (external heating elements) and 1 basket

371140 (E7FRED120N)

7-lt electric fryer top with 1 "V" shape well (external heating elements) and 1 basket

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency infrared heating elements (5.4kW) attached to the outside of the well. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped well.
- High efficiency infrared heating elements (5.4kW) are attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front of the well.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



APPROVAL:




Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL

Included Accessories


- 1 of Basket for 7lt top and free standing fryers PNC 921608

Optional Accessories

- Junction sealing kit PNC 206086
- Support for bridge type installation, 800mm PNC 206137
- Support for bridge type installation, 1000mm PNC 206138
- Support for bridge type installation, 1200mm PNC 206139
- Support for bridge type installation, 1400mm PNC 206140
- Support for bridge type installation, 1600mm PNC 206141
- Support for bridge type installation, 400mm PNC 206154
- Chimney upstand, 400mm PNC 206303
- Right and left side handrails PNC 206307
- Back handrail 800mm, Marine PNC 206308
- Chimney grid net, 400mm (700XP/900) PNC 206400
- 2 side covering panels for top appliances PNC 216277
- Basket for 7lt top and free standing fryers PNC 921608
- 1-section noodle basket for 60lt boiling pans (only for 371075) PNC 921626

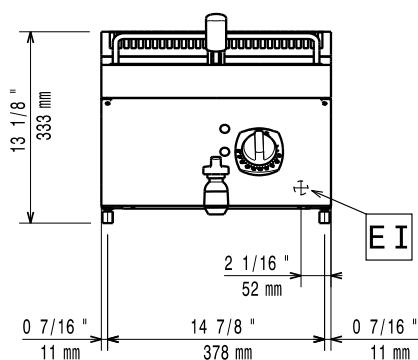


Front

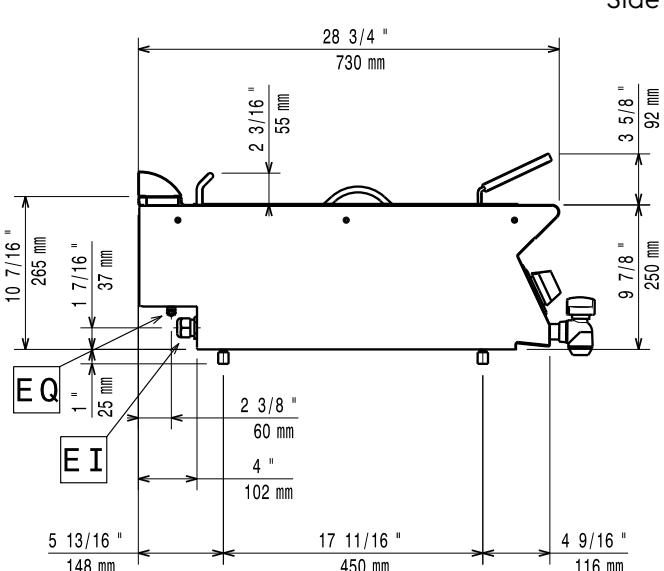

Side

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

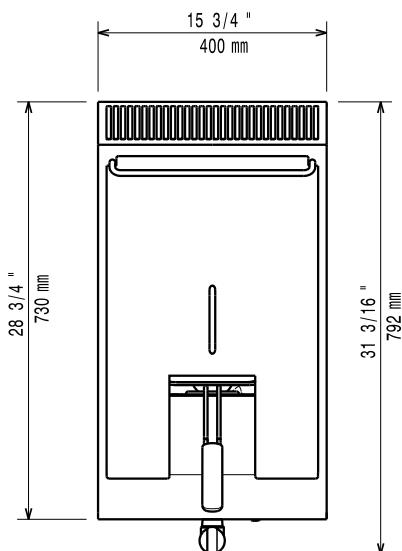
Electric
Supply voltage:

380-400 V/3N ph/50-60 Hz

371075 (E7FRED1B00)

371140 (E7FRED120N)

Total Watts:

230 V/3 ph/50/60 Hz

5.4 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width):

240 mm

Usable well dimensions (height):

235 mm

Usable well dimensions (depth):

380 mm

Well capacity:

5.5 lt MIN; 7 lt MAX

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

30 kg

Shipping weight:

29 kg

371075 (E7FRED1B00)

371140 (E7FRED120N)

Shipping height:

530 mm

371075 (E7FRED1B00)

371140 (E7FRED120N)

Shipping width:

540 mm

Shipping depth:

460 mm

Shipping volume:

820 mm

[NOT TRANSLATED]

371075 (E7FRED1B00)

371140 (E7FRED120N)

0.2 m³

EFE71M07

N7FE2