

Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



371066 (E7FRGD1B00)

7-It gas fryer top with 1 "V" shape well (external burners) and 1 basket

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped well.
- High efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

 1 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

Junction sealing kit	PNC 206086 🖵
 Draught diverter, 120 mm diameter 	PNC 206126 🗅
 Matching ring for flue condenser, 120 mm diameter 	PNC 206127 □
 Support for bridge type installation, 800mm 	PNC 206137 🗖
 Support for bridge type installation, 1000mm 	PNC 206138 □
 Support for bridge type installation, 1200mm 	PNC 206139 □
 Support for bridge type installation, 1400mm 	PNC 206140 🗅

APPROVAL:






Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter

• Support for bridge type installation, 1600mm	PNC 206141	
• Support for bridge type installation, 400mm	PNC 206154	
 Chimney upstand, 400mm 	PNC 206303	
 Right and left side handrails 	PNC 206307	
• Back handrail 800mm, Marine	PNC 206308	
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	
 Chimney grid net, 400mm (700XP/900) 	PNC 206400	
• - NOTTRANSLATED -	PNC 206467	
 2 side covering panels for top appliances 	PNC 216277	
• Basket for 7lt top and free standing fryers	PNC 921608	
 Pressure regulator for gas units 	PNC 927225	

Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter



Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter

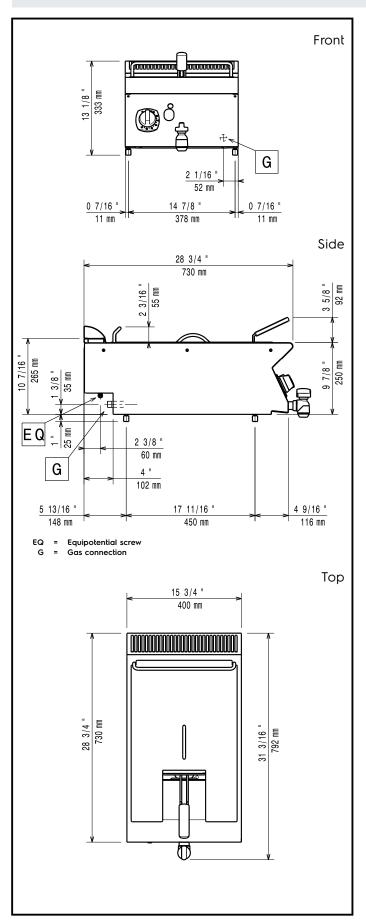

Gas

Gas Power: 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 235 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 5.5 lt MIN; 7 lt MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight:30 kgShipping weight:32 kgShipping height:520 mmShipping width:460 mmShipping depth:820 mmShipping volume:0.2 m³[NOT TRANSLATED]N7FG

Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter