



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP 2 Frontal Hot Plate Electric Induction Cooking Top Range

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



371023 (E7INEH2F0P)

Frontal 2-zone (5 kW each)
electric induction cooking
top with rear condiment
holder (6x1/9GN)

Short Form Specification

Item No.

6 mm thick glass ceramic cooking surface with 2 independently controlled 5 kW induction zones. Induction top surface with seamless transition between individual heating zones. Supplied with condiment rail to accept 6x1/9 GN containers. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Indicating lamp for each zone located on control console.
- Induction plates endowed with overheating safety device.
- Power to the individual zones can be set with progressive output i.e. fine regulation at the lower and larger progress at the upper levels.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- The well beneath the container support can be filled with ice to keep condiments cool and incorporates an overflow pipe for drainage.
- IPx4 water protection.
- Glass ceramic cooking surface with 2 independently controlled induction zones with a power of 5 kW per zone.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories

- | | |
|--|-------------------------------------|
| • Support for bridge type installation, 800mm | PNC 206137 ☐ |
| • Support for bridge type installation, 1000mm | PNC 206138 ☐ |
| • Support for bridge type installation, 1200mm | PNC 206139 ☐ |
| • Support for bridge type installation, 1400mm | PNC 206140 ☐ |
| • Support for bridge type installation, 1600mm | PNC 206141 ☐ |
| • Water column extension for 700 line | PNC 206291 ☐ |
| • Chimney upstand, 800mm | PNC 206304 ☐ |

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL

- 2 side covering panels for top appliances


PNC 216277 ☐

Modular Cooking Range Line 700XP 2 Frontal Hot Plate Electric Induction Cooking Top Range

Front

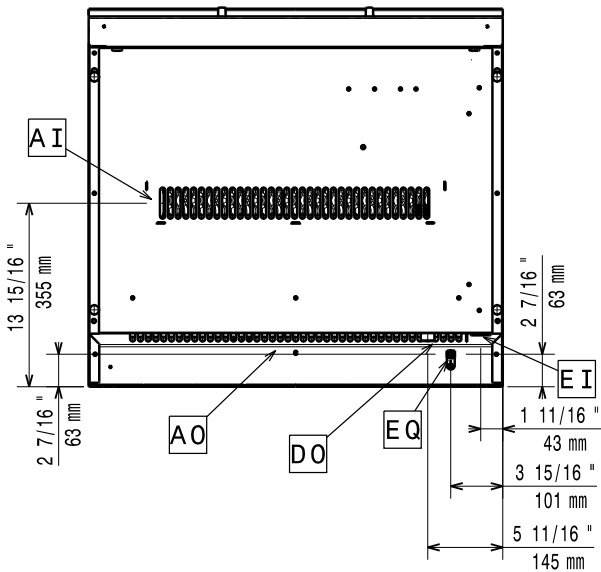


Side

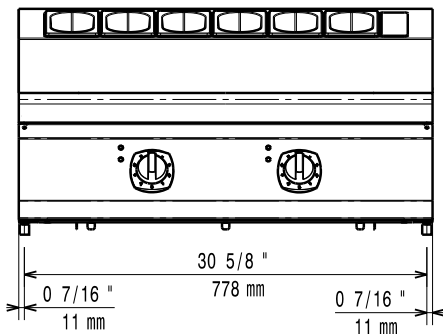

EI = Electrical inlet (power)
EQ = Equipotential screw

Top

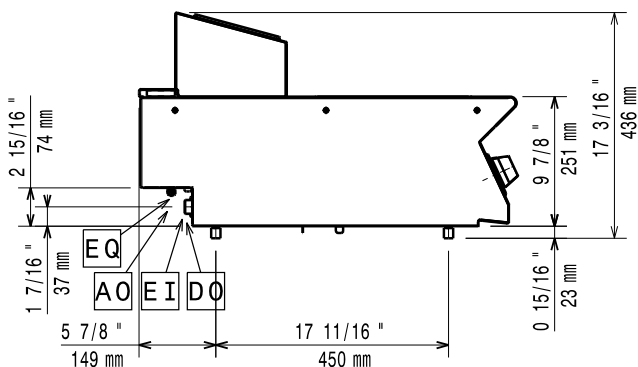

Electric

Supply voltage: 380-415 V/3 ph/50/60 Hz
Total Watts: 10 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.

Net weight: 51 kg
Shipping weight: 60 kg
Shipping height: 690 mm
Shipping width: 820 mm
Shipping depth: 860 mm
Shipping volume: 0.49 m³
[NOT TRANSLATED] IH72P
Induction Top Dimensions (width): 800 mm
Induction Top Dimensions (depth): 730 mm