



## Modular Cooking Range Line 700XP Two Wells Electric Fryer Top 7 liter



371076 (E7FREH2B00)

7+7-lt electric fryer top with 2 "V" shape wells (external heating elements) and 2 baskets

### Short Form Specification

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency infrared heating elements (10.8kW) attached to the outside of the wells. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped wells.
- High efficiency infrared heating elements are attached to the outside of the wells.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front wells.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

### Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

### Included Accessories

- 2 of Basket for 7lt top and free PNC 921608 standing fryers

### Optional Accessories

• Junction sealing kit	PNC 206086 <input type="checkbox"/>
• Support for bridge type installation, 800mm	PNC 206137 <input type="checkbox"/>
• Support for bridge type installation, 1000mm	PNC 206138 <input type="checkbox"/>
• Support for bridge type installation, 1200mm	PNC 206139 <input type="checkbox"/>
• Support for bridge type installation, 1400mm	PNC 206140 <input type="checkbox"/>
• Support for bridge type installation, 1600mm	PNC 206141 <input type="checkbox"/>
• Chimney upstand, 800mm	PNC 206304 <input type="checkbox"/>
• Right and left side handrails	PNC 206307 <input type="checkbox"/>
• Back handrail 800mm, Marine	PNC 206308 <input type="checkbox"/>

### APPROVAL:



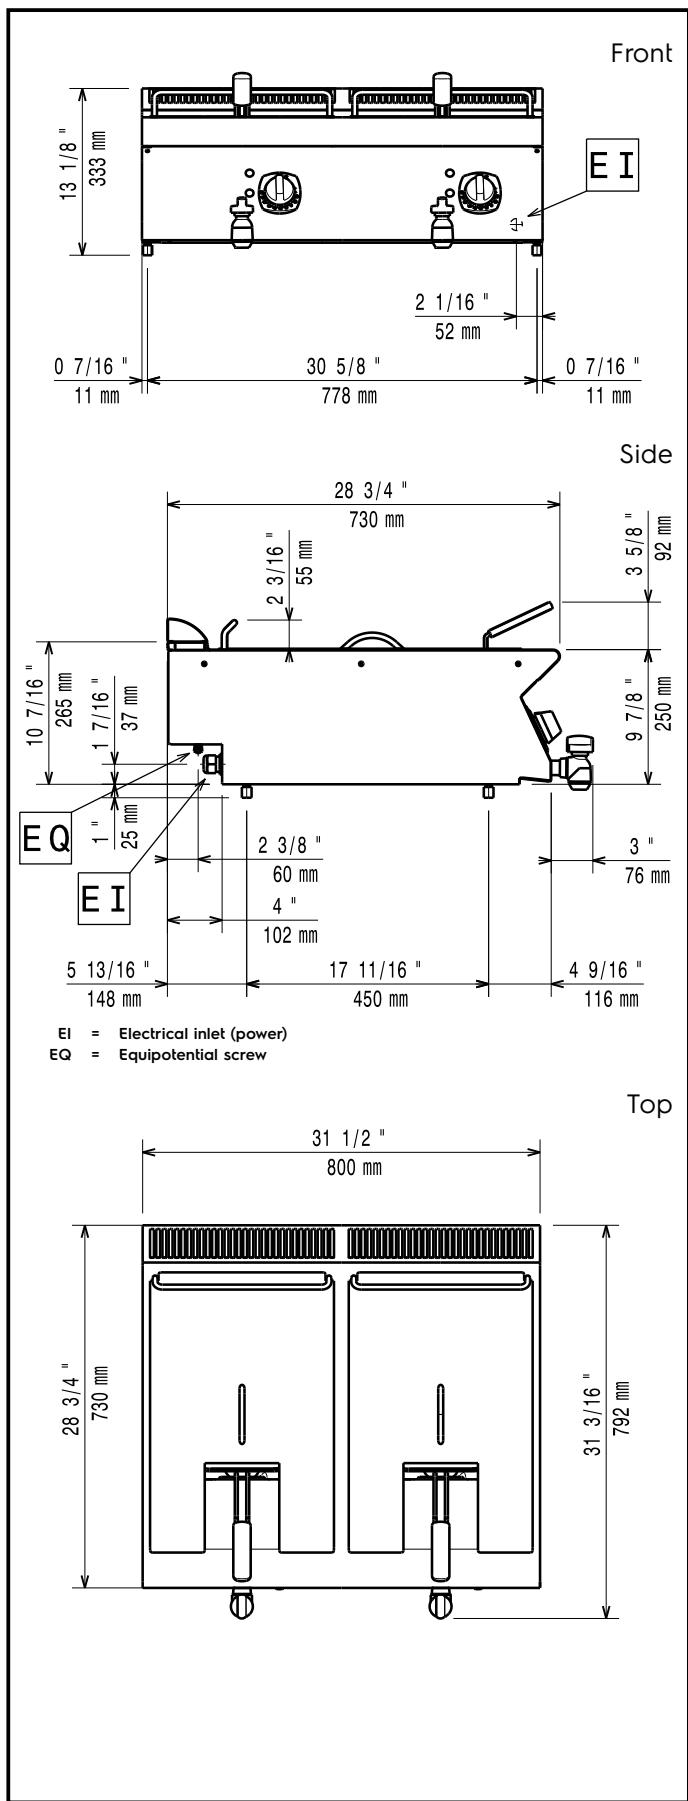
Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
ELUX\_EMAIL

- 2 drawers for open base cupboards, 100mm height PNC 206318
- Chimney grid net, 400mm (700XP/900) PNC 206400
- 2 side covering panels for top appliances PNC 216277
- Basket for 7lt top and free standing fryers PNC 921608

**Modular Cooking Range Line**  
**700XP Two Wells Electric Fryer Top 7 liter**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.19


**Electric**

Supply voltage: 380-400 V/3N ph/50-60 Hz

Total Watts: 10.8 kW

**Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Usable well dimensions (width):** 240 mm

**Usable well dimensions (height):** 235 mm

**Usable well dimensions (depth):** 380 mm

**Well capacity:** 5.5 lt MIN; 7 lt MAX

**Thermostat Range:** 105 °C MIN; 185 °C MAX

**Net weight:** 40.5 kg

**Shipping weight:** 50 kg

**Shipping height:** 520 mm

**Shipping width:** 820 mm

**Shipping depth:** 860 mm

**Shipping volume:** 0.37 m<sup>3</sup>

**[NOT TRANSLATED]** EFE72M07

