

Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 7 liter

TEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



371069 (E7FRGH2BF0)

7+7-It gas fryer free standing with 2 "V" shape wells (external burners) and 2 baskets

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. Two high efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped wells.
- Two high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPX 4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Included Accessories

• 2 of Door for open base PNC 206350 cupboard

 2 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

Junction sealing kit
 Draught diverter, 150 mm diameter
 Matching ring for flue condenser, 150 mm diameter

PNC 206132 □
PNC 206133 □
PNC 206135 □
PNC 206133 □
PNC 206135 □
PNC 2

• Kit 4 wheels - 2 swivelling with PNC 206135 Date brake

Flanged feet kit PNC 206136 □

APPROVAL:






Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 7 liter


 Frontal kicking strip for concrete installation, 800mm 	PNC 206148	
Frontal kicking strip for concrete installation, 1000mm	PNC 206150	
Frontal kicking strip for concrete	PNC 206151	
installation, 1200mmFrontal kicking strip for concrete	PNC 206152	
installation, 1600mm • Frontal kicking strip, 800mm (not for	PNC 206176	
refr-freezer base)		_
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
• Flue condenser for 1 module, 150	PNC 206246	
mm diameter • Pair of side kicking strips	PNC 206249	
 Pair of side kicking strips for 	PNC 206265	
concrete installation • Chimney upstand, 800mm	PNC 206304	
Right and left side handrails	PNC 206304 PNC 206307	
Back handrail 800mm, Marine	PNC 206308	
Door for open base cupboard	PNC 206350	
Base support for feet or wheels -	PNC 206367	
800mm (700/900)	114C 200507	_
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Chimney grid net, 400mm	PNC 206400	
(700XP/900)	1110 200 100	_
- NOTTRANSLATED -	PNC 206467	
 2 side covering panels for free standing appliances 	PNC 216000	
Basket for 7lt top and free standing fryers	PNC 921608	
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	
 Pressure regulator for gas units 	PNC 927225	
-		






Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 7 liter





EQ = Equipotential screw
G = Gas connection

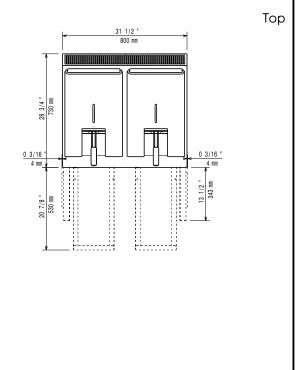

Gas

Natural gas - Pressure:

371069 (E7FRGH2BF0) 7" w.c. (17.4 mbar)

Gas Power: 14 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 235 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 5.5 lt MIN; 7 lt MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight:71 kgShipping weight:82 kgShipping height:1130 mmShipping width:820 mmShipping depth:860 mmShipping volume:0.8 m³[NOT TRANSLATED]N7FG

Modular Cooking Range Line
700XP Two Wells Freestanding Gas Fryer 7 liter