



## Modular Cooking Range Line 700XP 2-Hot Plates Electric Boiling Top Range



371014 (E7ECED2R00) 2-hot plate (2,6 kW each) electric boiling top  
371126 (E7ECED2R0N) 2-hot plate (2,6 kW each) electric boiling top

### Short Form Specification

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. Two 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPX4 water protection.
- Suitable for countertop installation.

### Construction

- External panel in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

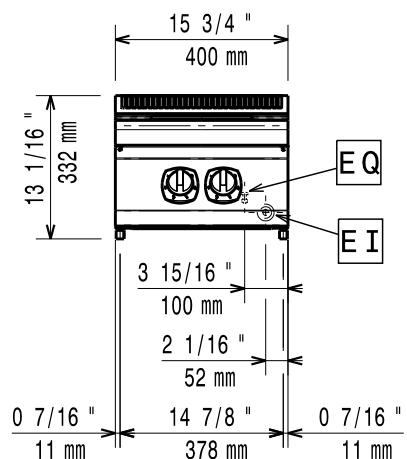
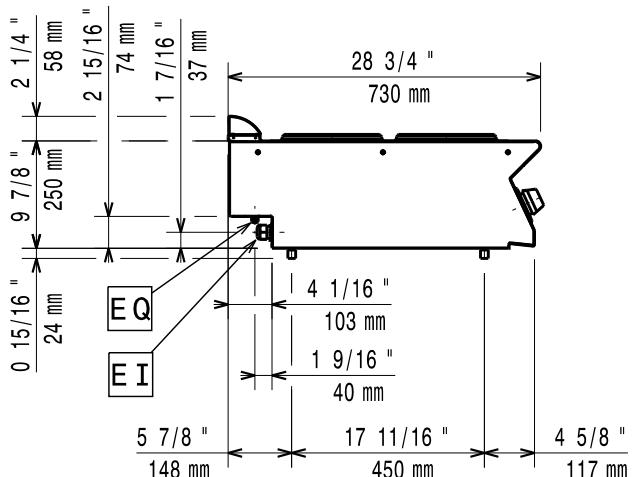
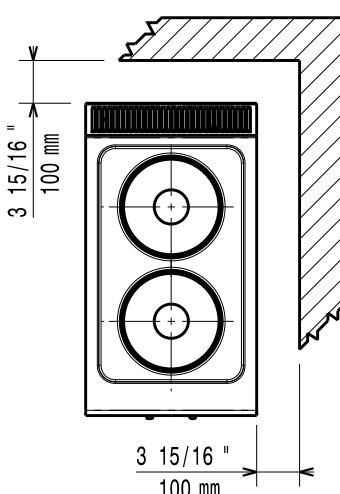
### Optional Accessories

• Junction sealing kit	PNC 206086 <input type="checkbox"/>
• Support for bridge type installation, 800mm	PNC 206137 <input type="checkbox"/>
• Support for bridge type installation, 1000mm	PNC 206138 <input type="checkbox"/>
• Support for bridge type installation, 1200mm	PNC 206139 <input type="checkbox"/>
• Support for bridge type installation, 1400mm	PNC 206140 <input type="checkbox"/>
• Support for bridge type installation, 1600mm	PNC 206141 <input type="checkbox"/>
• Support for bridge type installation, 400mm	PNC 206154 <input type="checkbox"/>
• Water column with swivel arm (water column extension not included)	PNC 206289 <input type="checkbox"/>
• Water column extension for 700 line	PNC 206291 <input type="checkbox"/>
• Chimney upstand, 400mm	PNC 206303 <input type="checkbox"/>
• Right and left side handrails	PNC 206307 <input type="checkbox"/>
• Back handrail 800mm, Marine	PNC 206308 <input type="checkbox"/>
• Chimney grid net, 400mm (700XP/900)	PNC 206400 <input type="checkbox"/>
• Frontal handrail, 400mm	PNC 216046 <input type="checkbox"/>
• Frontal handrail, 800mm	PNC 216047 <input type="checkbox"/>
• Frontal handrail, 1200mm	PNC 216049 <input type="checkbox"/>
• Frontal handrail, 1600mm	PNC 216050 <input type="checkbox"/>
• Large handrail - portioning shelf, 400mm	PNC 216185 <input type="checkbox"/>
• Large handrail - portioning shelf, 800mm (only for 371126)	PNC 216186 <input type="checkbox"/>
• 2 side covering panels for top appliances	PNC 216277 <input type="checkbox"/>
• Full size basket for 14 and 15lt free standing fryers (only for 371126)	PNC 921691 <input type="checkbox"/>

### APPROVAL:



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
ELUX\_EMAIL


**Front**

**Side**

**Top**
**Electric**
**Supply voltage:**
**371014 (E7ECED2R00)**
**380-400 V/3 ph/50-60 Hz**
**371126 (E7ECED2R0N)**
**230 V/3 ph/50/60 Hz**
**Total Watts:**
**5.2 kW**
**Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Net weight:** 20 kg

**Shipping weight:**
**371014 (E7ECED2R00)**
**23.75 kg**
**371126 (E7ECED2R0N)**
**24 kg**
**Shipping height:**
**371014 (E7ECED2R00)**
**520 mm**
**371126 (E7ECED2R0N)**
**540 mm**
**Shipping width:**
**460 mm**
**Shipping depth:**
**371014 (E7ECED2R00)**
**800 mm**
**371126 (E7ECED2R0N)**
**820 mm**
**Shipping volume:**
**371014 (E7ECED2R00)**
**0.19 m<sup>3</sup>**
**371126 (E7ECED2R0N)**
**0.2 m<sup>3</sup>**
**[NOT TRANSLATED]**
**371014 (E7ECED2R00)**
**EH72T**
**371126 (E7ECED2R0N)**
**N7CE1**
**Front Plates Power:**
**2.6 - 0 kW**
**Back Plates Power:**
**2.6 - kW**
**Front Plates dimensions:**
**Ø 230**
**Back Plates dimensions:**
**Ø 230**
**EI** = Electrical inlet (power)  
**EQ** = Equipotential screw