



## Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



|                     |   |
|---------------------|---|
| 371015 (E7ECEH4R00) | 4-hot plate (2,6 kW each)<br>electric boiling top |
| 371127 (E7ECEH4R0N) | 4-hot plate (2,6 kW each)<br>electric boiling top |

### Short Form Specification

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPX 4 water protection.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.


### Optional Accessories

- |  |            |                          |
|--|------------|--------------------------|
| • Junction sealing kit   | PNC 206086 | <input type="checkbox"/> |
| • Support for bridge type installation, 800mm                        | PNC 206137 | <input type="checkbox"/> |
| • Support for bridge type installation, 1000mm                       | PNC 206138 | <input type="checkbox"/> |
| • Support for bridge type installation, 1200mm                       | PNC 206139 | <input type="checkbox"/> |
| • Support for bridge type installation, 1400mm                       | PNC 206140 | <input type="checkbox"/> |
| • Support for bridge type installation, 1600mm                       | PNC 206141 | <input type="checkbox"/> |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | <input type="checkbox"/> |
| • Water column extension for 700 line                                | PNC 206291 | <input type="checkbox"/> |
| • Chimney upstand, 800mm   | PNC 206304 | <input type="checkbox"/> |
| • Right and left side handrails                                      | PNC 206307 | <input type="checkbox"/> |
| • Back handrail 800mm, Marine  | PNC 206308 | <input type="checkbox"/> |
| • Chimney grid net, 400mm (700XP/900)                                | PNC 206400 | <input type="checkbox"/> |
| • Frontal handrail, 800mm  | PNC 216047 | <input type="checkbox"/> |
| • Frontal handrail, 1200mm   | PNC 216049 | <input type="checkbox"/> |
| • Frontal handrail, 1600mm   | PNC 216050 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 800mm                           | PNC 216186 | <input type="checkbox"/> |
| • 2 side covering panels for top appliances                          | PNC 216277 | <input type="checkbox"/> |
| • Basket for 7lt top and free standing fryers (only for 371015)      | PNC 921608 | <input type="checkbox"/> |

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
[professional@electrolux.com](mailto:professional@electrolux.com)

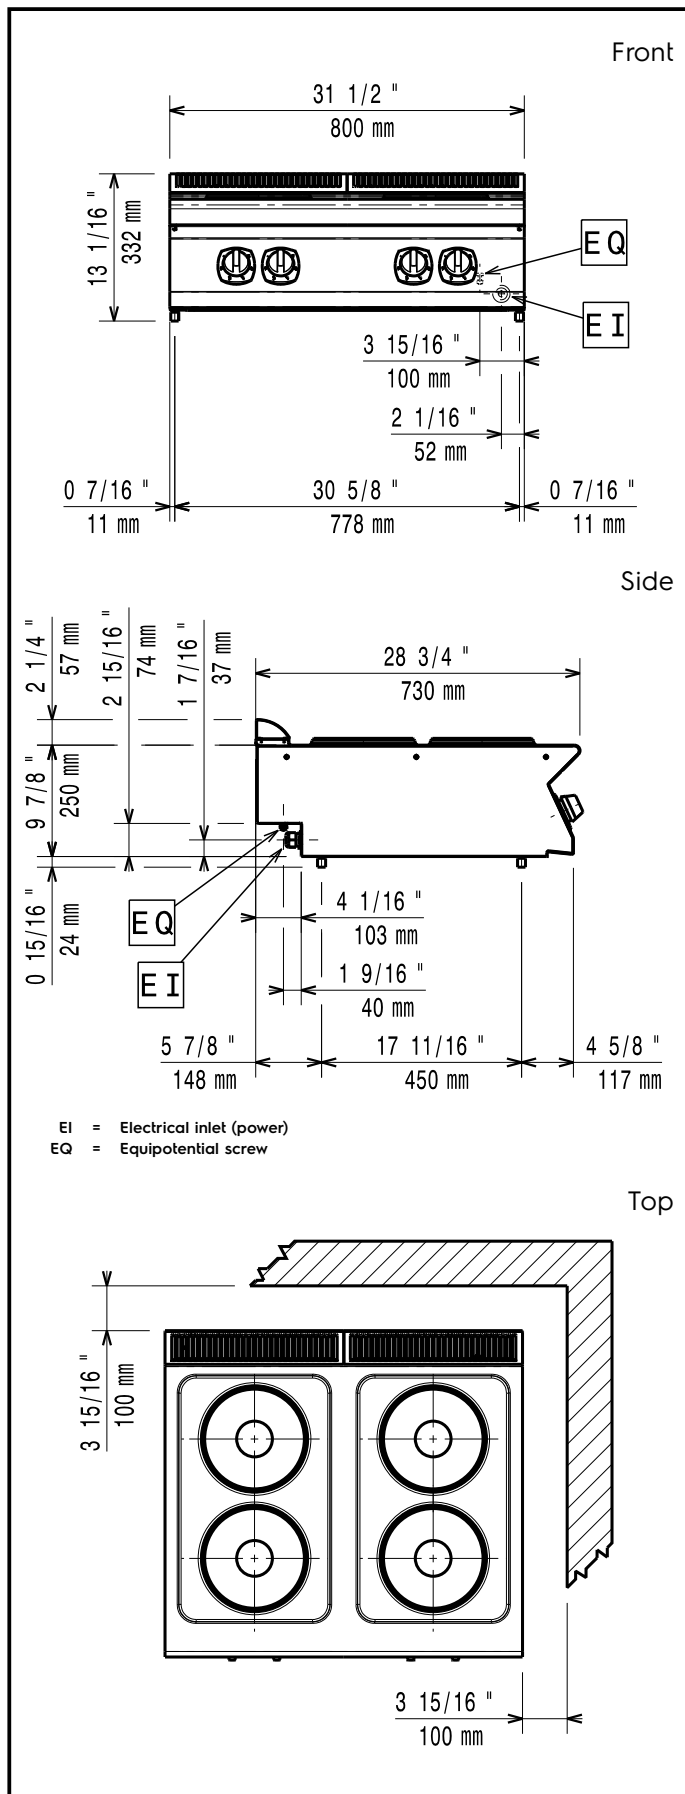

### Electric

#### Supply voltage:

371015 (E7ECEH4R00)

380-400 V/3 ph/50-60 Hz

371127 (E7ECEH4R0N)

230 V/3 ph/50/60 Hz

#### Total Watts:

10.4 kW

### Key Information:

#### Net weight:

40 kg

#### Shipping weight:

371015 (E7ECEH4R00)

39 kg

371127 (E7ECEH4R0N)

40 kg

#### Shipping height:

371015 (E7ECEH4R00)

520 mm

371127 (E7ECEH4R0N)

540 mm

#### Shipping width:

820 mm

#### Shipping depth:

860 mm

#### Shipping volume:

371015 (E7ECEH4R00)

0.37 m<sup>3</sup>

371127 (E7ECEH4R0N)

0.38 m<sup>3</sup>

#### [NOT TRANSLATED]

371015 (E7ECEH4R00)

EH74T

371127 (E7ECEH4R0N)

N7CEI

#### Front Plates Power:

2.6 - 2.6 kW

#### Back Plates Power:

2.6 - 2.6 kW

#### Front Plates dimensions:

Ø 230 Ø 230

#### Back Plates dimensions:

Ø 230 Ø 230

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.