# Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven



371002 (E7GCGH4CG0)

4-burner (5,5 kW each) gas range on gas oven (6 kW)

# **Short Form Specification**

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

#### APPROVAL:

TEM #
MODEL #
NAME #
SIS #
AIA #

### **Main Features**

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Oven thermostat adjustable from 110 °C to 270 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPX 4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

## **Included Accessories**

• 1 of GN2/1 chrome grid for PNC 164250 static oven

# **Optional Accessories**

- GN2/1 chrome grid for static PNC 164250 □
   oven
- Junction sealing kit PNC 206086 
   Draught diverter, 150 mm diameter
- Matching ring for flue PNC 206133 condenser, 150 mm diameter

Excelence

Experience the Excellence www.electroluxprofessional.com professional@electrolux.com



# Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

<ul> <li>Kit 4 wheels - 2 swivelling with brake</li> </ul>	PNC 206135	• 2 side stanc
Flanged feet kit	PNC 206136	<ul> <li>Front</li> </ul>
Frontal kicking strip for concrete	PNC 206148	<ul> <li>Front</li> </ul>
installation, 800mm		<ul> <li>Front</li> </ul>
<ul> <li>Frontal kicking strip for concrete installation, 1000mm</li> </ul>	PNC 206150	<ul> <li>Large 800m</li> </ul>
<ul> <li>Frontal kicking strip for concrete installation, 1200mm</li> </ul>	PNC 206151	<ul> <li>University</li> <li>steel</li> </ul>
<ul> <li>Frontal kicking strip for concrete installation, 1600mm</li> </ul>	PNC 206152	for in sourc
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	• Press
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
<ul> <li>Flue condenser for 1 module, 150 mm diameter</li> </ul>	PNC 206246	
Pair of side kicking strips	PNC 206249	
<ul> <li>Single burner smooth plate for direct cooking - fits frontal burners only</li> </ul>	PNC 206260	
<ul> <li>Single burner ribbed plate for direct cooking- fits frontal burners only</li> </ul>	PNC 206261	
<ul> <li>Single burner radiant plate for pan support</li> </ul>	PNC 206264	
Pair of side kicking strips for concrete installation	PNC 206265	
<ul> <li>Water column with swivel arm (water column extension not included)</li> </ul>	PNC 206289	
• Water column extension for 700 line	PNC 206291	
<ul> <li>Stainless steel double grid for 2 burners</li> </ul>	PNC 206297	
<ul> <li>Chimney upstand, 800mm</li> </ul>	PNC 206304	
<ul> <li>Right and left side handrails</li> </ul>	PNC 206307	
• Back handrail 800mm, Marine	PNC 206308	
• Wok pan support for open burners (700/900)	PNC 206363	
Base support for feet or wheels - 800mm (700/900)	PNC 206367	
<ul> <li>Base support for feet or wheels - 1200mm (700/900)</li> </ul>	PNC 206368	
<ul> <li>Base support for feet or wheels - 1600mm (700/900)</li> </ul>	PNC 206369	
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
<ul> <li>- NOT TRANSLATED -</li> </ul>	PNC 206387	
- NOTTRANSLATED -	PNC 206402	
<ul> <li>- NOT TRANSLATED -</li> </ul>	PNC 206460	


,	NC :	216000	
Frontal handrail 1200mm     PN	NC 2	216047	
	NC 2	216049	
• Frontal handrail, 1600mm PN	VC :	216050	
<ul> <li>Large handrail - portioning shelf, PN 800mm</li> </ul>	NC 2	216186	
steel handle (diam. 240mm) suitable	VC -	653597	
for induction and all other heating sources			
Pressure regulator for gas units     PN		927225	

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Electrolux PROFESSIONAL

# Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

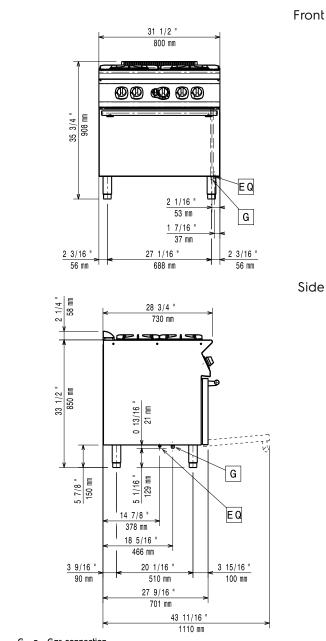

#### G = Gas connection



Тор

CE

### Gas

Gas Power:	28 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Town
Gas Inlet:	1/2"
	1/ =

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Oven working Temperature:	110 °C MIN; 270 °C MAX
Oven Cavity Dimensions (width):	540 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	650 mm
Net weight:	80 kg
Shipping weight:	100 kg
Shipping height:	1080 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.76 m³
Front Burners Power:	5.5 - 5.5 kW
Back Burners Power:	5.5 - 5.5 kW
[NOT TRANSLATED]	N7CG
Back Burners Dimension - mm	Ø60 Ø60
Front Burners Dimension - mm	Ø60 Ø60

#### Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.