



Modular Cooking Range Line 700XP 6-Hot Plates Electric Boiling Top Range



371019 (E7ECEL6R00)

6-hot plate (2,6 kW each)
electric boiling top

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. Six 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM #

MODEL #

NAME #

SIS #

AIA #

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The six 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

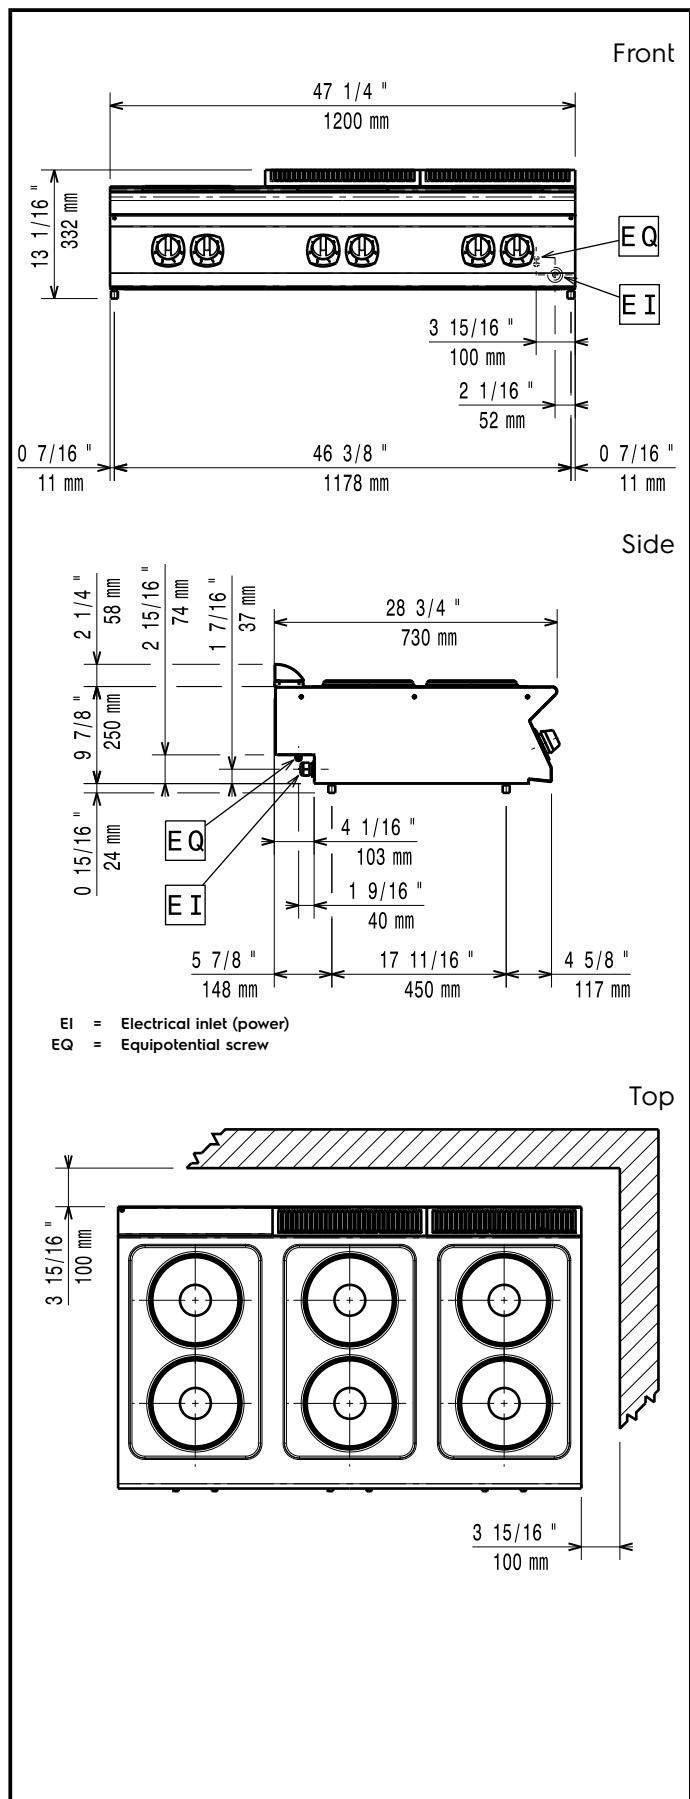
Optional Accessories

• Junction sealing kit	PNC 206086 <input type="checkbox"/>
• Support for bridge type installation, 1200mm	PNC 206139 <input type="checkbox"/>
• Support for bridge type installation, 1400mm	PNC 206140 <input type="checkbox"/>
• Support for bridge type installation, 1600mm	PNC 206141 <input type="checkbox"/>
• Water column with swivel arm (water column extension not included)	PNC 206289 <input type="checkbox"/>
• Water column extension for 700 line	PNC 206291 <input type="checkbox"/>
• Chimney upstand, 200mm	PNC 206302 <input type="checkbox"/>
• Chimney upstand, 800mm	PNC 206304 <input type="checkbox"/>
• Right and left side handrails	PNC 206307 <input type="checkbox"/>
• Chimney grid net, 400mm (700XP/900)	PNC 206400 <input type="checkbox"/>
• Frontal handrail, 1200mm	PNC 216049 <input type="checkbox"/>
• Frontal handrail, 1600mm	PNC 216050 <input type="checkbox"/>
• 2 side covering panels for top appliances	PNC 216277 <input type="checkbox"/>
• Deflector for floured products for 15lt fryers	PNC 921696 <input type="checkbox"/>

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL


Electric

Supply voltage: 380-400 V/3 ph/50-60 Hz
Total Watts: 15.6 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight:	60 kg
Shipping weight:	56 kg
Shipping height:	540 mm
Shipping width:	830 mm
Shipping depth:	1300 mm
Shipping volume:	0.58 m ³
[NOT TRANSLATED]	EH76T
Front Plates Power:	2.6 - 2.6 kW
Back Plates Power:	2.6 - 2.6 kW
Front Plates dimensions:	Ø 230 Ø 230
Back Plates dimensions:	Ø 230 Ø 230