



## Modular Cooking Range Line 700XP 6-Hot Plates Electric Boiling Top Range

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



371019 (E7ECEL6R00)

6-hot plate (2,6 kW each)  
electric boiling top

### Short Form Specification

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. Six 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The six 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.


### Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Support for bridge type installation, 1200mm PNC 206139 ☐
- Support for bridge type installation, 1400mm PNC 206140 ☐
- Support for bridge type installation, 1600mm PNC 206141 ☐
- Water column with swivel arm (water column extension not included) PNC 206289 ☐
- Water column extension for 700 line PNC 206291 ☐
- Chimney upstand, 200mm PNC 206302 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- Right and left side handrails PNC 206307 ☐
- Chimney grid net, 400mm (700XP/900) PNC 206400 ☐
- Frontal handrail, 1200mm PNC 216049 ☐
- Frontal handrail, 1600mm PNC 216050 ☐
- 2 side covering panels for top appliances PNC 216277 ☐
- Deflector for floured products for 15lt fryers PNC 921696 ☐

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
ELUX\_EMAIL

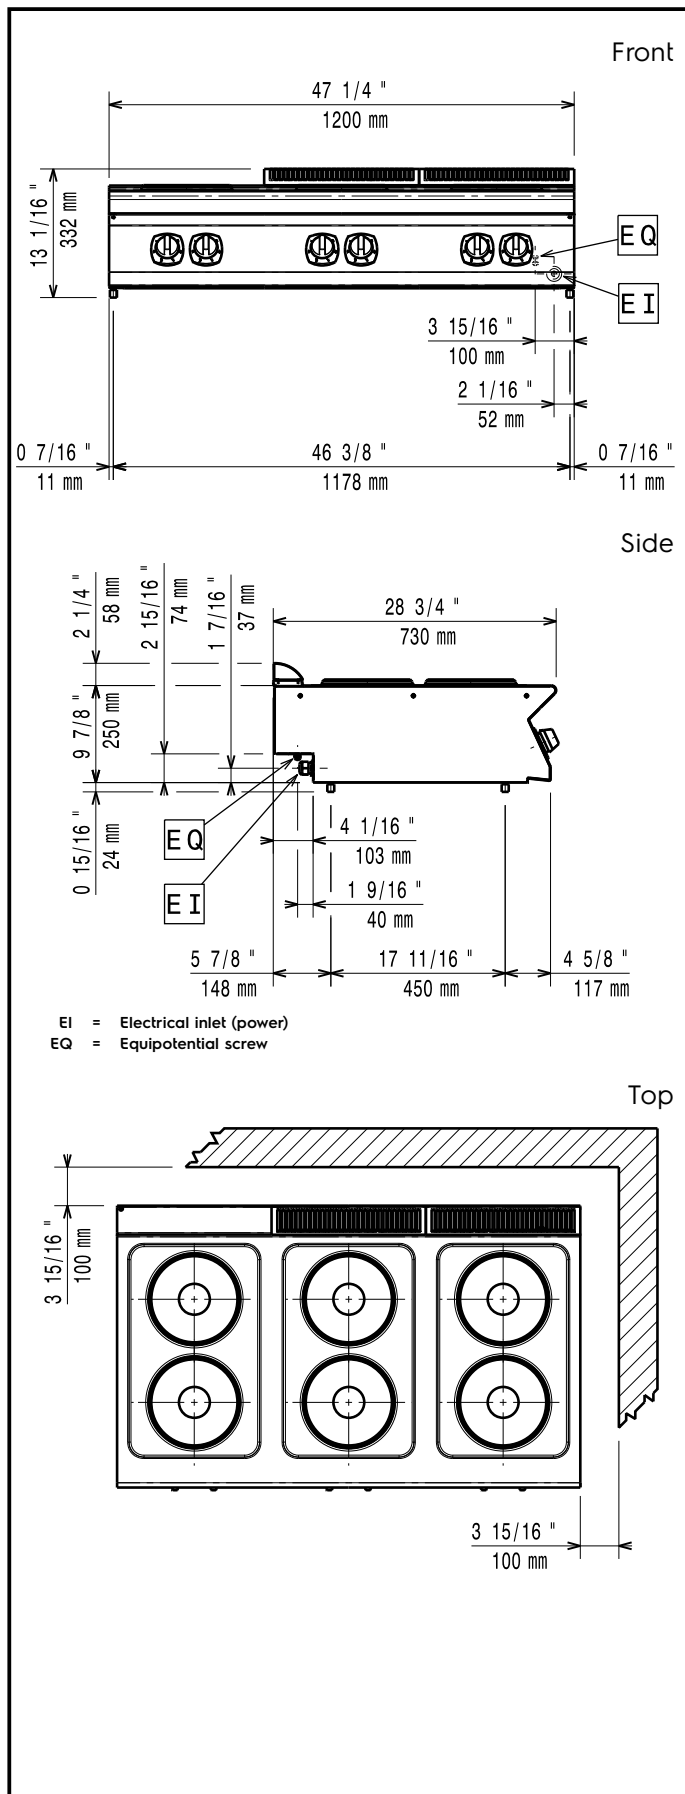

### Electric

|                 |                         |
|-----------------|-------------------------|
| Supply voltage: | 380-400 V/3 ph/50-60 Hz |
| Total Watts:    | 15.6 kW                 |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

|                          |                     |
|--------------------------|---------------------|
| Net weight:              | 60 kg               |
| Shipping weight:         | 56 kg               |
| Shipping height:         | 540 mm              |
| Shipping width:          | 830 mm              |
| Shipping depth:          | 1300 mm             |
| Shipping volume:         | 0.58 m <sup>3</sup> |
| [NOT TRANSLATED]         | EH76T               |
| Front Plates Power:      | 2.6 - 2.6 kW        |
| Back Plates Power:       | 2.6 - 2.6 kW        |
| Front Plates dimensions: | Ø 230 Ø 230         |
| Back Plates dimensions:  | Ø 230 Ø 230         |