



## Modular Cooking Range Line 700XP Automatic Basket Lifting System - 200 mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



206352 (LIFT7E)

Automatic programmable  
basket lifting system for  
24,5lt pasta cookers, 2 lifters

### Short Form Specification

Item No. \_\_\_\_\_

Unit to be 700XP Automatic programmable basket lifting system for 24,5lt pasta cookers, with 2 lifters. 200 mm wide basket lifting system with 2 stainless steel basket supports to lift one 1/2 basket per lifter (baskets are optional, to be ordered separately). Unit shall be placed on either side of the pasta cooker or in combination with a second automatic lifting unit on the opposite side to provide lifting for 4 single portion square baskets. The unit shall feature programmability and automatic lifting function to guarantee repeatability of the cooking cycle.

### Main Features


- 200 mm wide automatic basket lifting system with 2 stainless steel basket supports to provide lifting for one 1/2 basket per lifter (baskets are optional accessories to be ordered separately).
- The electronic programmability and automatic lifting of the baskets make this unit a must for any kitchen wanting to standardize their cooking procedures.
- Programmability and automatic lifting function guarantee repeatability of the cooking cycle, thus ensuring the same high quality of the food time after time due to the automation of the entire cooking process.
- Unit can be used also in "manual mode" by pushing a button to lower and raise baskets.
- Possibility to memorize up to 9 cooking times via digital control, which can be assigned independently to the single basket support.
- Easy operation, automatic basket lifting can be activated through push button function.
- Unit may be placed on either side of the pasta cooker or in combination with a second automatic lifting unit on the opposite side to provide lifting for 4 single portion square baskets.

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
ELUX\_EMAIL

Front

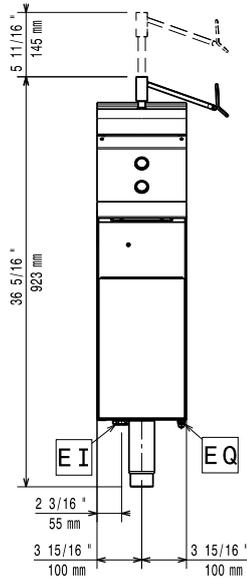


Side

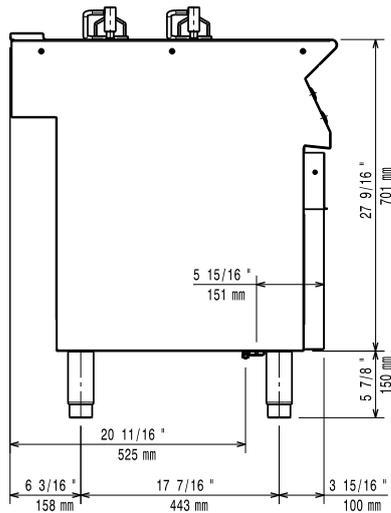

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

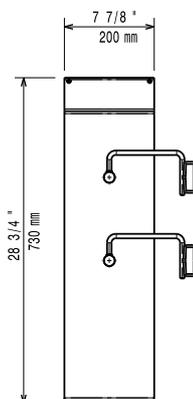

## Electric

Supply voltage: 230 V/1 ph/50/60 Hz  
 Total Watts: 0.2 kW

## Key Information:

External dimensions, Width: 200 mm  
 External dimensions, Depth: 730 mm  
 External dimensions, Height: 850 mm  
 Net weight: 30 kg