



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Full Module Electric Char- Grill Top

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371240 (E7GREHGS0U)

* NOT TRANSLATED *

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Heating via incoloy armoured heating elements below the cooking plate.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Cast iron grids can be adjusted on two levels.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.

Included Accessories

- 1 of - NOT TRANSLATED - PNC 206422

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Support for bridge type installation, 800mm PNC 206137 ☐
- Support for bridge type installation, 1000mm PNC 206138 ☐
- Support for bridge type installation, 1200mm PNC 206139 ☐
- Support for bridge type installation, 1400mm PNC 206140 ☐
- Support for bridge type installation, 1600mm PNC 206141 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- Right and left side handrails PNC 206307 ☐
- Back handrail 800mm, Marine PNC 206308 ☐
- Chimney grid net, 400mm (700XP/900) PNC 206400 ☐
- GRIDS WITH DRAIN SHAPE 400MM-700 TOP PNC 206416 ☐
- KIT HEIGHT ADJUST.SUPP.GRILL GRIDS PNC 206418 ☐
- - NOT TRANSLATED - PNC 206421 ☐
- - NOT TRANSLATED - PNC 206422 ☐


APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL

- | | | |
|---|------------|--------------------------|
| • Frontal handrail, 800mm | PNC 216047 | ☐ |
| • Frontal handrail, 1200mm | PNC 216049 | ☐ |
| • Frontal handrail, 1600mm | PNC 216050 | ☐ |
| • Large handrail - portioning shelf, 400mm | PNC 216185 | ☐ |
| • Large handrail - portioning shelf, 800mm | PNC 216186 | ☐ |
| • 2 side covering panels for top appliances | PNC 216277 | ☐ |

Front

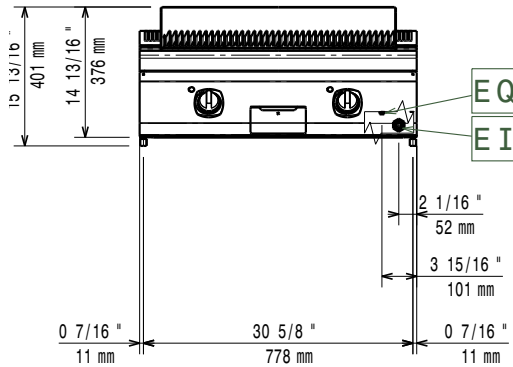


Side

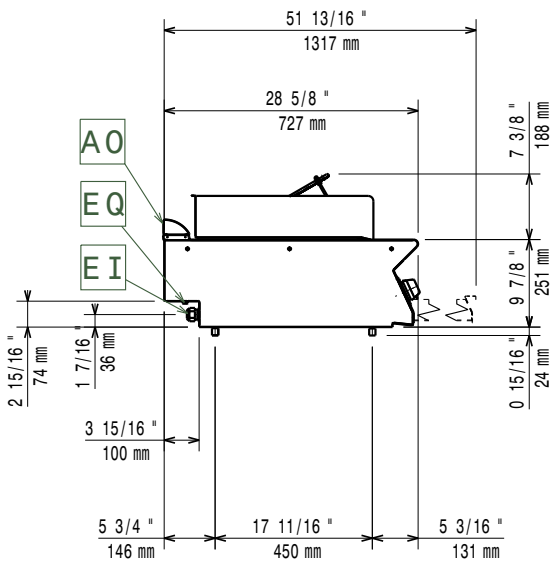

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

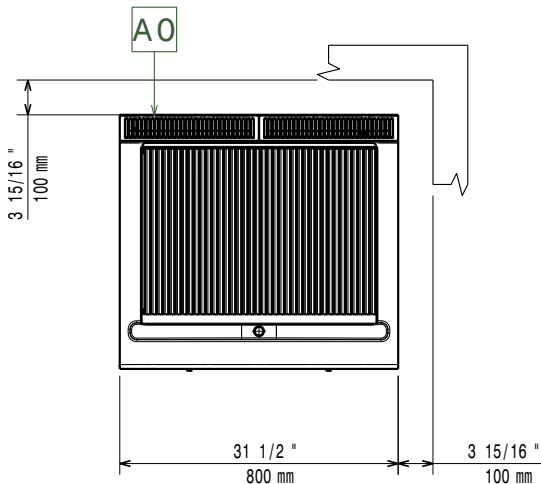

Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Electrical power max.:	8 kW
Total Watts:	8 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight:	42 kg
Shipping weight:	67 kg
Shipping height:	520 mm
Shipping width:	820 mm
Shipping depth:	840 mm
Shipping volume:	0.36 m ³
[NOT TRANSLATED]	N7GE