



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391010 (E9GCGH4CE0)

4-burner (1x10 kW, 3x6 kW)
gas range on electric oven
(6 kW)

391164 (E9GCGH4CEN)

4-burner (1x10 kW, 3x6 kW)
gas range on electric oven
(6 kW)

Short Form Specification

Item No. _____

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The three 6 kW and one 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
-60 mm burners with continuous power regulation from 1,5 to 6 kWCHAR(
- Gas burners supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven with 40 mm thick oven door for heat insulation, positioned beneath the base plate.
- Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed cast iron oven base plate.
- Oven thermostat adjustable from 110 °C to 285 °C or from 120 °C to 280 °C for model 391164.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL


• Draught diverter, 150 mm diameter	PNC 206132	☐	• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Matching ring for flue condenser, 150 mm diameter	PNC 206133	☐	• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Kit 4 wheels - 2 swivelling with brake	PNC 206135	☐	• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Flanged feet kit	PNC 206136	☐	• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐	• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐	• - NOT TRANSLATED - (only for 391010)	PNC 206384	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐	• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐	• - NOT TRANSLATED - (only for 391010)	PNC 206458	☐
• 2 SIDE KICKING STRIPS- CONCRETE INST-900	PNC 206157	☐	• Side handrail-right/left hand (900XP)	PNC 216044	☐
• Single burner radiant plate for pan support	PNC 206170	☐	• Frontal handrail, 800mm	PNC 216047	☐
• Single burner smooth plate for direct cooking - fits frontal burners only	PNC 206171	☐	• Frontal handrail, 1200mm	PNC 216049	☐
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	☐	• Frontal handrail, 1600mm	PNC 216050	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐	• 2 side covering panels for free standing appliances	PNC 216134	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐	• Large handrail - portioning shelf, 400mm	PNC 216185	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐	• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐	• Pressure regulator for gas units	PNC 927225	☐
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐	• Deflector for floured products for 23lt fryers (only for 391010)	PNC 960645	☐
• 2 panels for service duct for single installation	PNC 206181	☐			
• Hygienic lid for 23lt fryers (only for 391164)	PNC 206201	☐			
• 2 panels for service duct for back to back installation	PNC 206202	☐			
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐			
• Water column with swivel arm (water column extension not included)	PNC 206289	☐			
• Water column extension for 900 line	PNC 206290	☐			
• Stainless steel double grid for 2 burners	PNC 206298	☐			
• Chimney upstand, 800mm	PNC 206304	☐			
• Back handrail 800mm, Marine	PNC 206308	☐			
• - NOT TRANSLATED -	PNC 206309	☐			
• Wok pan support for open burners (700/900)	PNC 206363	☐			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐			




Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven

Front

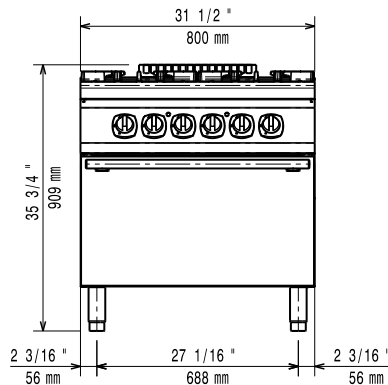


Side

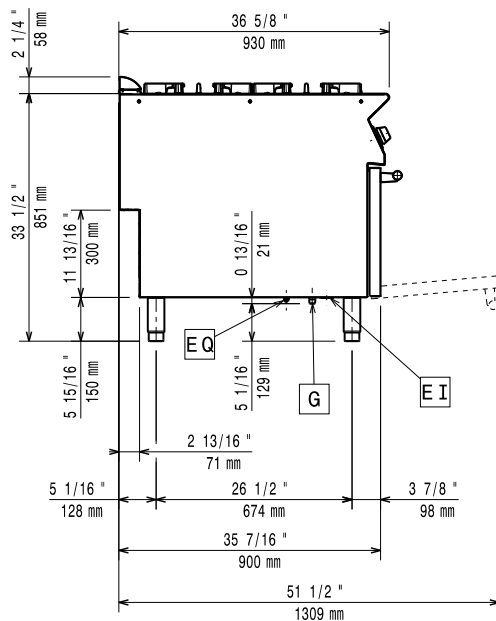

EI = Electrical inlet (power)
G = Gas connection

Top

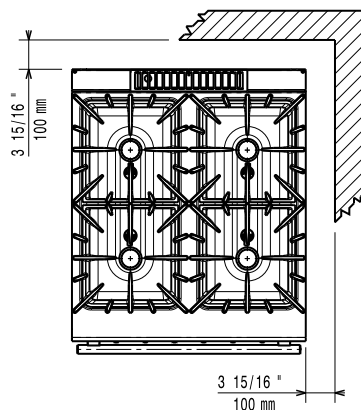

Gas

Natural gas - Pressure:

391010 (E9GCGH4CE0) 7" w.c. (17.4 mbar)

Gas Power:

28 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

1/2"

Key Information:

Oven Heat Input:

6 kW

Oven working Temperature:

391010 (E9GCGH4CE0) 110 °C MIN; 285 °C MAX

391164 (E9GCGH4CEN) 120 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width):

575 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

700 mm

Net weight:

391010 (E9GCGH4CE0) 155 kg

391164 (E9GCGH4CEN) 203 kg

Shipping weight:

391010 (E9GCGH4CE0) 137 kg

391164 (E9GCGH4CEN) 130 kg

Shipping height:

391010 (E9GCGH4CE0) 1080 mm

391164 (E9GCGH4CEN) 1040 mm

Shipping width:

1020 mm

Shipping depth:

860 mm

Shipping volume:

391010 (E9GCGH4CE0) 0.95 m³

391164 (E9GCGH4CEN) 0.91 m³

Front Burners Power:

6 - 6 kW

Back Burners Power:

6 - 10 kW

[NOT TRANSLATED]

N9CG

Back Burners Dimension - mm

Ø 60 Ø 100

Front Burners Dimension - mm

Ø 60 Ø 60

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line
900XP 4-Burner Gas Range on Electric Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.16