

Modular Cooking Range Line 900XP Gas Solid Top on Gas Oven

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



391019 (E9STGH10G0)

Gas solid top (10,5 kW) on
gas oven (8,5 kW)

Short Form Specification

Item No. _____

High efficiency 10.5 kW central burner with flame failure device and protected pilot light. Large cooking surface with differentiated heating zones. Large flat cooking surface made in cast iron allows for the use of a number of various sized pots and pans, all easily moved across the surface without lifting. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Gas heated, 10.5 kW central burner, solid top.
- Durable cast iron cooking plate, easy to clean.
- The center of the plate can reach a maximum temperature of 500 °C while decreasing outwards.
- Central burner with optimized combustion, flame failure device and protected pilot light.
- Piezo ignition.
- Temperature gradients to satisfy different cooking needs, provided over the whole plate thanks to the temperature fine-tuning by zone.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Pans can easily be moved from one area to another without lifting.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Oven thermostat adjustable from 120 °C to 280 °C.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Kit 4 wheels - 2 swivelling with brake PNC 206135 ☐

APPROVAL: _____


• Flanged feet kit	PNC 206136	☐
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐
• 2 SIDE KICKING STRIPS- CONCRETE INST-900	PNC 206157	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐
• 2 panels for service duct for single installation	PNC 206181	☐
• 2 panels for service duct for back to back installation	PNC 206202	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension for 900 line	PNC 206290	☐
• Stopper for fry top with horizontal plate	PNC 206296	☐
• Chimney upstand, 800mm	PNC 206304	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• - NOT TRANSLATED -	PNC 206386	☐
• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• - NOT TRANSLATED -	PNC 206459	☐
• Side handrail-right/left hand (900XP)	PNC 216044	☐
• Frontal handrail, 800mm	PNC 216047	☐
• Frontal handrail, 1200mm	PNC 216049	☐
• Frontal handrail, 1600mm	PNC 216050	☐
• 2 side covering panels for free standing appliances	PNC 216134	☐
• Large handrail - portioning shelf, 400mm	PNC 216185	☐
• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• Pressure regulator for gas units	PNC 927225	☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP Gas Solid Top on Gas Oven

Front

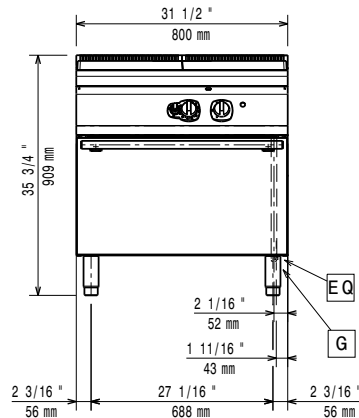


Side

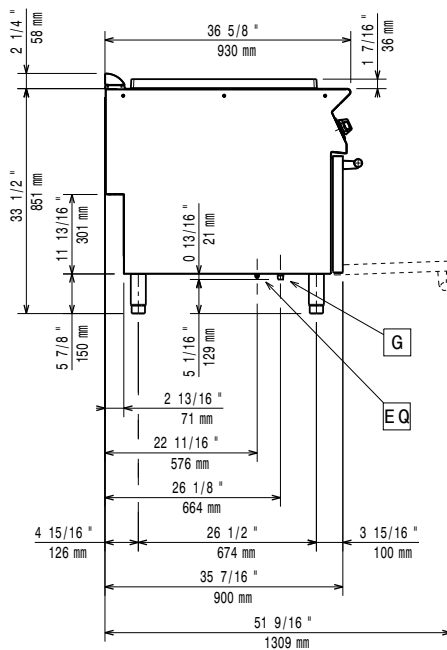

EQ = Equipotential screw
G = Gas connection

Top

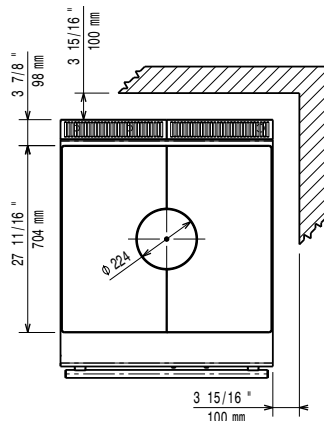

Gas

Natural gas - Pressure:

391019 (E9STGH10G0)

7" w.c. (17.4 mbar)

Gas Power:

19 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas; Town Gas

Gas Inlet:

1/2"

Key Information:

Oven working Temperature: 120 °C MIN; 280 °C MAX

Oven Cavity Dimensions
(width):

575 mm

Oven Cavity Dimensions
(height):

300 mm

Oven Cavity Dimensions
(depth):

700 mm

Net weight:

171 kg

Shipping weight:

169 kg

Shipping height:

1080 mm

Shipping width:

1020 mm

Shipping depth:

860 mm

Shipping volume:

0.95 m³

[NOT TRANSLATED]

N9TG

Solid top usable surface
(width):

795 mm

Solid top usable surface
(depth):

696 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line
900XP Gas Solid Top on Gas Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.07.07