

SkyLine ProS Electric Combi Oven 6GN2/1

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



217611 (ECOE62K2C0)

SkyLine ProS combi boilerless oven with touch screen control, 6x2/1GN, electric, 2 cooking modes (recipe program, manual), automatic cleaning

217621 (ECOE62K2A0)

SkyLine ProS combi boilerless oven with touch screen control, 6x2/1GN, electric, 2 cooking modes (recipe program, manual), automatic cleaning

Short Form Specification

Item No.

Combi oven with high resolution full touch screen interface, multilanguage.

- Boilerless steaming function to add and retain moisture.
- OptiFlow air distribution system to achieve maximum performance with 7 fan speed levels.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid.
- Cooking modes: Programs (a maximum of 1000 recipes can be stored and organized in 16 different categories); Manual; EcoDelta cooking cycle.
- Special functions: MultiTimer cooking, Plan-n-Save to cut running costs, Make-it-Mine to customize interface, SkyHub to customize homepage, agenda MyPlanner, automatic backup mode to avoid downtime.
- USB port to download HACCP data, programs and settings. Connectivity readv.
- Single sensor core temperature probe.
- Double-glass door with LED lights.
- Stainless steel construction throughout.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Main Features

- Boilerless steaming function to add and retain moisture for high quality, consistent cooking results.
- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation:-0 = no additional moisture (browning, au gratin, baking, pre-cooked food)-1-2 = low moisture (small portions of meat and fish)-3-4 = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)-5-6 = medium moisture (roasted vegetable and first step of roasted meat & fish)-7-8 = medium-high moisture (stewed vegetables)-9-10 = high moisture (poached meat and jacket potatoes)
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Pictures upload for full customization of cooking cycles.
- Automatic fast cool down and pre-heat function.
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 6 GN 2/1 or 12 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

User Interface & Data Management







SkyLine ProS Electric Combi Oven 6GN2/1

 Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise

• Smoker for lengthwise and crosswise

4 flanged feet for 6 & 10 GN , 2",

• Tray support for 6 & 10 GN 2/1

disassembled open base

• - NOTTRANSLATED -

NOTTRANSLATED -

- NOT TRANSLATED -

- NOT TRANSLATED -

- NOT TRANSLATED -

2/1 oven

GN 2/1 oven

2/1 travs

& 10 GN 2/1 oven

pitch

Grease collection tray, GN 2/1, H=60

Grid for whole duck (8 per grid - 1,8kg

Wall mounted detergent tank holder

Slide-in rack with handle for 6 & 10 GN

• Tray rack with wheels, 5 GN 2/1, 80mm

• Open base with tray support for 6 & 10

• Cupboard base with tray support for 6

Hot cupboard base with tray support

for 6 & 10 GN 2/1 oven holding 5xGN

oven (4 kinds of smoker wood chips are

ovens

Universal skewer rack

available on request)

Multipurpose hook

100-130mm

each), GN 1/1

• 6 short skewers

PNC 922325

PNC 922326

PNC 922328

PNC 922338

PNC 922348

PNC 922351

PNC 922357

PNC 922362

PNC 922384

PNC 922386

PNC 922390

PNC 922421

PNC 922435

PNC 922438

PNC 922439

PNC 922605

PNC 922611

PNC 922613

PNC 922616

PNC 922617

- High resolution full touch screen interface (translated in more than 30 languages) color-blind friendly panel.
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plugin sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Automatic consumption visualization at the end of the cycle.

Sustainability



- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler (Registered Design at EPO).
- Reduced powerfunction for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinseonly) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.

Optional Accessories

- NOTTRANSLATED -	PNC 920004	External connection kit for detergent	PNC 922618	
 Wheel kit for 6 & 10 GN 1/1 and 2/1 GN 	PNC 922003	and rinse aid		
oven base (not for the disassembled one)		 Stacking kit for electric 6 GN 2/1 oven placed on electric 10 GN 2/1 oven 	PNC 922621	
 Pair of AISI 304 stainless steel grids, GN 1/1 	PNC 922017	 Trolley for slide-in rack for 6 & 10 GN 2/1 oven and blast chiller freezer 	PNC 922627	
 Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 	PNC 922036	 Trolley for mobile rack for 2 stacked 6 GN 2/1 ovens on riser 	PNC 922629	
 AISI 304 stainless steel grid, GN 1/1 	PNC 922062	• Trolley for mobile rack for 6 GN 2/1 on 6	PNC 922631	
 AISI 304 stainless steel grid, GN 2/1 	PNC 922076	or 10 GN 2/1 ovens		
• External side spray unit (needs to be mounted outside and includes support	PNC 922171	 Riser on feet for stacked 2x6 GN 2/1 ovens 	PNC 922633	
to be mounted on the oven)		 Riser on wheels for stacked 2x6 GN 2/1 	PNC 922634	
 Pair of AISI 304 stainless steel grids, 	PNC 922175	ovens, height 250mm		
GN 2/1		Stainless steel drain kit for 6 & 10 GN	PNC 922636	
Baking tray for 5 baguettes in	PNC 922189	oven, dia=50mm	D) 10 000 / 77	
perforated aluminum with silicon coating, 400x600x38mm		 Plastic drain kit for 6 &10 GN oven, dia=50mm 	PNC 922637	
 Baking tray with 4 edges in perforated aluminum, 400x600x20mm 	PNC 922190	 Trolley with 2 tanks for grease collection 	PNC 922638	
 Baking tray with 4 edges in aluminum, 400x600x20mm 	PNC 922191	Grease collection kit for open base (2 tanks, open/close device and drain)	PNC 922639	
 Pair of frying baskets 	PNC 922239	Wall support for 6 GN 2/1 oven	PNC 922644	
 AISI 304 stainless steel bakery/pastry 	PNC 922264	Dehydration tray, GN 1/1, H=20mm	PNC 922651	
grid 400x600mm		• Flat dehydration tray, GN 1/1	PNC 922652	
 Double-step door opening kit 	PNC 922265	• Open base for 6 & 10 GN 2/1 oven,	PNC 922654	
 Grid for whole chicken (8 per grid - 	PNC 922266	disassembled	5 /22007	_
1,2kg each), GN 1/1		 Heat shield for 6 GN 2/1 oven 	PNC 922665	
 USB probe for sous-vide cooking 	PNC 922281			













SkyLine ProS Electric Combi Oven 6GN2/1

• Heat shield-stacked for ovens 6 GN 2/1 on 6 GN 2/1	PNC 922666	
 Heat shield-stacked for ovens 6 GN 2/1 on 10 GN 2/1 	PNC 922667	
• Fixed tray rack, 5 GN 2/1, 85mm pitch	PNC 922681	
Kit to fix oven to the wall	PNC 922687	
 Tray support for 6 & 10 GN 2/1 open base 	PNC 922692	
• 4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm	PNC 922693	
Detergent tank holder for open base	PNC 922699	
 Tray rack with wheels, 6 GN 2/1, 65mm pitch (included) 	PNC 922700	
Mesh grilling grid	PNC 922713	
 Probe holder for liquids 	PNC 922714	
Odourless hood with fan for 6 & 10 GN 2/1 electric ovens	PNC 922719	
 Odourless hood with fan for 6+6 or 6+10 GN 2/1 electric ovens 	PNC 922721	
 Condensation hood with fan for 6 & 10 GN 2/1 electric oven 	PNC 922724	
Condensation hood with fan for stacking 6+6 or 6+10 GN 2/1 electric ovens	PNC 922726	
• Exhaust hood with fan for 6 & 10 GN 2/1 GN ovens	PNC 922729	
• Exhaust hood with fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922731	
• Exhaust hood without fan for 6&10x2/1 GN oven	PNC 922734	
• Exhaust hood without fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922736	
 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm 	PNC 922745	
• Tray for traditional static cooking, H=100mm	PNC 922746	
 Double-face griddle, one side ribbed and one side smooth, 400x600mm 	PNC 922747	
- NOTTRANSLATED -	PNC 922752	
- NOTTRANSLATED -	PNC 922773	
- NOTTRANSLATED -	PNC 922774	
- NOTTRANSLATED -	PNC 922776	
 Non-stick universal pan, GN 1/1, H=20mm 	PNC 925000	
 Non-stick universal pan, GN 1/1, H=40mm 	PNC 925001	
 Non-stick universal pan, GN 1/1, H=60mm 	PNC 925002	
 Double-face griddle, one side ribbed and one side smooth, GN 1/1 	PNC 925003	
Aluminum grill, GN 1/1	PNC 925004	
 Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 	PNC 925005	
• Flat baking tray with 2 edges, GN 1/1	PNC 925006	
 Potato baker for 28 potatoes, GN 1/1 	PNC 925008	
 Compatibility kit for installation on previous base GN 2/1 	PNC 930218	
ACC_CHEM		
NOTTRANSLATED	PNC 0S2394	
• *NOTTRANSLATED*	PNC 032394	














SkyLine ProS Electric Combi Oven 6GN2/1


Front 42 15/16 D 60 3/16 " 1528 mm 18 7/16 17 3/16 " 468 mm 7 5/16 " 185 mm 2 5/16 38 3/8 2 5/16 " 974 mm

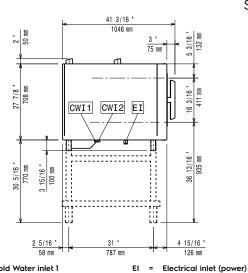

CWII Cold Water inlet 1 CWI2 Cold Water Inlet 2

D Drain

DO Overflow drain pipe

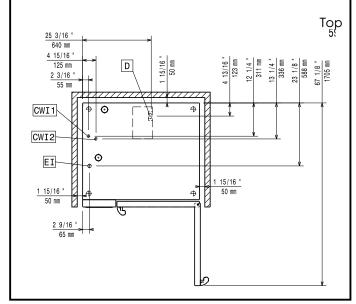

Electric

Circuit breaker required

Supply voltage:

217611 (ECOE62K2C0) 220-240 V/3 ph/50-60 Hz 217621 (ECOE62K2A0) 380-415 V/3N ph/50-60 Hz

Electrical power max.: 22.9 kW 21.4 kW Electrical power, default:

Water:

Max inlet water supply

30 °C temperature: 3/4" Water inlet "FCW" connection: 1-6 bar Pressure, bar min/max: Chlorides: <10 ppm >50 µS/cm Conductivity: Drain "D": 50mm

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality

information.

Side

Installation:

Clearance: 5 cm rear and Clearance:

right hand sides.

Suggested clearance for service access: 50 cm left hand side.

Capacity:

6 (GN 2/1) Max load capacity: 60 kg

Key Information:

Right Side Door hinges: 1090 mm External dimensions, Width: External dimensions, Depth: 971 mm External dimensions, Height: 808 mm Weight: 140 kg Net weight: 140 kg 163 kg Shipping weight: Shipping volume: 1.28 m³

ISO Certificates

ISO Standards:









