

## Libero Line Series

### Infrared, 2 zones, front to back - UK plug

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



603524 (DIL2G)

Plug-in Infrared cook top. 2 zones, front to back model. UK plug

### Short Form Specification

#### Item No. \_\_\_\_\_

Table top design, front-to-back model. Heavy duty 304 AISI stainless steel construction. High impact, heavy duty glass ceramic cooking surface for durability and easy cleaning. Two infrared, double spiral cooking zones (1,4kW each) with independent touch button controls. Smooth rounded edges guarantee a flush fit between units. Digital power level display and touch button control panel. IP24 protection. Cord and plug included. UK plug.

### Main Features

- Suitable for pot and pan with diameter of 140-250mm.
- Table top design, front-to-back model.
- Heavy duty AISI 304 Stainless steel construction.
- Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness.
- Two independently controlled infrared cooking zones with touch button control panel.
- Digital power level display (from 0 to 9).
- Precise temperature control that helps maintain and quickly reach the desired temperature.
- IP24 protected.
- Cord and plug included.
- 4 adjustable feet.

### Optional Accessories

- Stainless steel universal frying pan with stainless steel handle (diam. 200mm) suitable for induction and all other heating sources PNC 653596 ☐
- Universal frying pan with stainless steel handle (diam. 240mm) suitable for induction and all other heating sources PNC 653597 ☐
- Universal frying pan with stainless steel handle (diam. 280mm) suitable for induction and all other heating sources PNC 653598 ☐
- Support frame for GN containers for infrared cook top, front-to-back PNC 653612 ☐
- Universal frying pan with smooth plate suitable for infrared cookers PNC 653615 ☐
- Universal frying pan with ribbed plate suitable for infrared cookers PNC 653616 ☐


APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## Libero Line Series Infrared, 2 zones, front to back - UK plug

Front

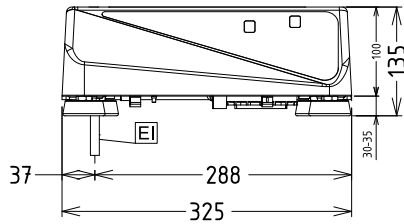


Side

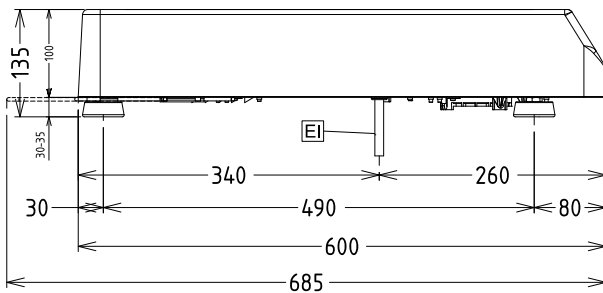

EI = Electrical inlet (power)  
EO = Electrical Outlet

Top

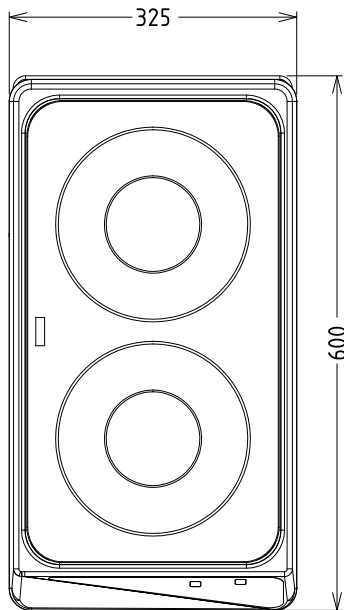

### Electric

Supply voltage:

603524 (DIL2G)

220-240 V/1 ph/50/60 Hz

### Key Information:

Front Plates Power:

1.4 - 0 kW

Back Plates Power:

1.4 - kW

Front Plates dimensions:

Ø 220

Back Plates dimensions:

Ø 220

External dimensions, Width:

325 mm

External dimensions, Depth:

600 mm

External dimensions, Height:

135 mm

Net weight:

12 kg

Plug Type:

1phase: Schuko; 3phase:  
CEE



Libero Line Series  
Infrared, 2 zones, front to back - UK plug

The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2024.04.18