

**Hand held Mixers**  
**Speedy Mixer portable mixer 250 W**  
**Variable speed with Stainless Steel Tube**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**600021 (SMVT20W25)**

Portable mixer with stainless steel tube 200 mm, variable speed

**600022 (SMVT25W25)**

Portable mixer with stainless steel tube 250 mm, variable speed

### Short Form Specification

**Item No.** \_\_\_\_\_

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Variable speed: up to 15000 rpm.

### Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:-Choice of stainless steel tube: 200 mm or 250 mm, depending on model- Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.


### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Variable speed from 2500 to 15000 rpm to make preparation tasks fast and easy.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

### Optional Accessories

- Whisk tool for speedy mixer PNC 650057
- - NOT TRANSLATED - PNC 650187
- - NOT TRANSLATED - PNC 650188
- - NOT TRANSLATED - PNC 653090
- - NOT TRANSLATED - PNC 653098

**APPROVAL:** \_\_\_\_\_

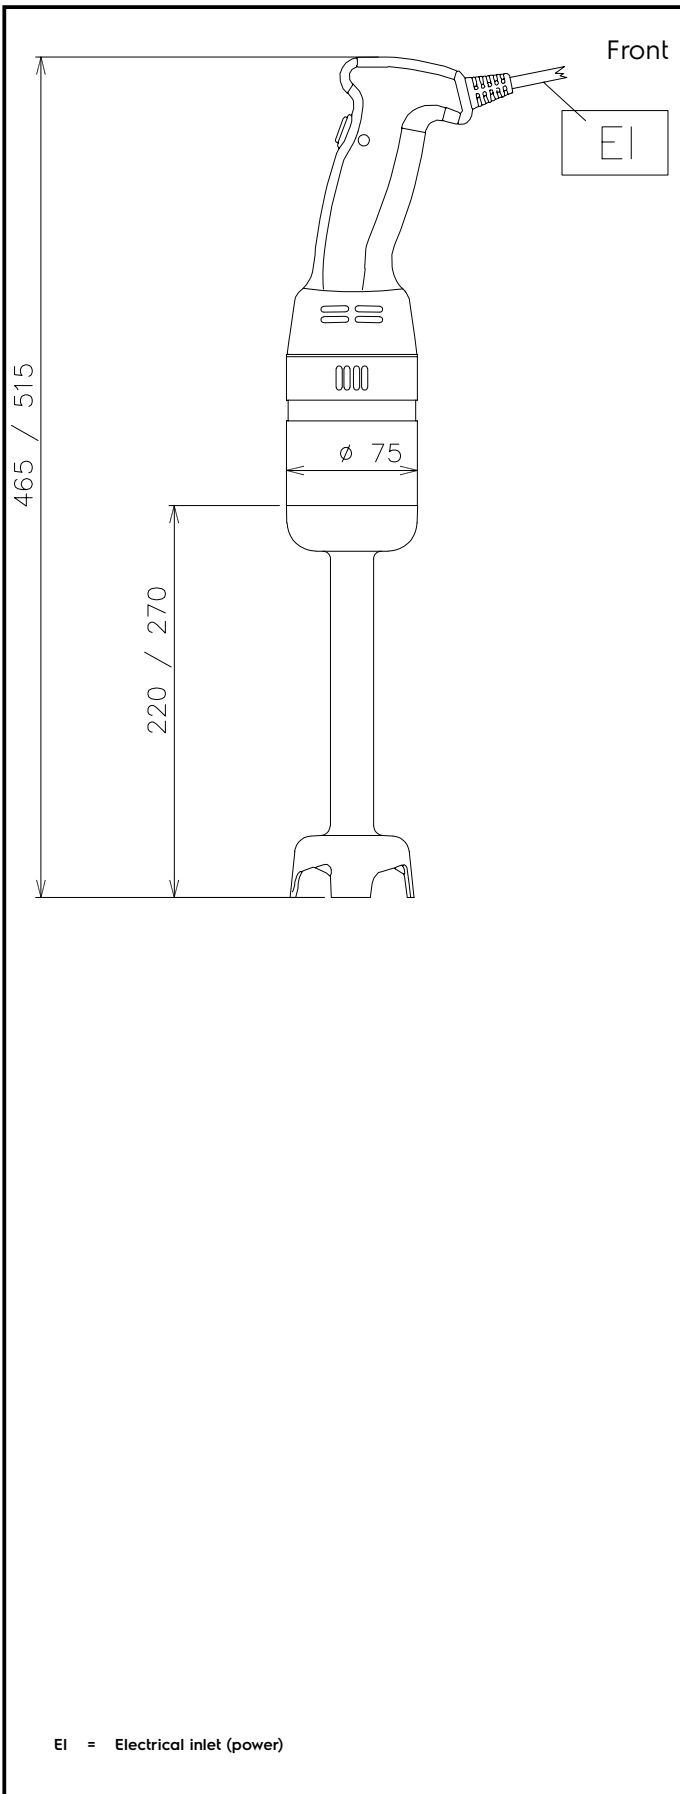

### Electric

**Supply voltage:**

600021 (SMVT20W25) 230 V/1N ph/50 Hz

600022 (SMVT25W25) 230 V/1N ph/50 Hz

**Electrical power max.:**

0.25 kW

**Total Watts:**

0.25 kW

### Key Information:

**External dimensions, Width:** 110 mm

**External dimensions, Depth:** 75 mm

**External dimensions, Height:**

600021 (SMVT20W25) 470 mm

600022 (SMVT25W25) 520 mm

**Shipping weight:**

600021 (SMVT20W25) 1.83 kg

600022 (SMVT25W25) 1.88 kg