

## Hand held Mixers

### Speedy Mixer portable mixer 250 W

### Variable speed with Stainless Steel Tube

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



600021 (SMVT20W25)

Portable mixer with stainless steel tube 200 mm, variable speed

600022 (SMVT25W25)

Portable mixer with stainless steel tube 250 mm, variable speed

### Short Form Specification

Item No. \_\_\_\_\_

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Variable speed: up to 15000 rpm.

### Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:-Choice of stainless steel tube: 200 mm or 250 mm, depending on model- Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.


### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Variable speed from 2500 to 15000 rpm to make preparation tasks fast and easy.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

### Optional Accessories

- Whisk tool for speedy mixer PNC 650057 ☐
- - NOT TRANSLATED - PNC 650187 ☐
- - NOT TRANSLATED - PNC 650188 ☐
- - NOT TRANSLATED - PNC 653090 ☐
- - NOT TRANSLATED - PNC 653098 ☐

APPROVAL: \_\_\_\_\_

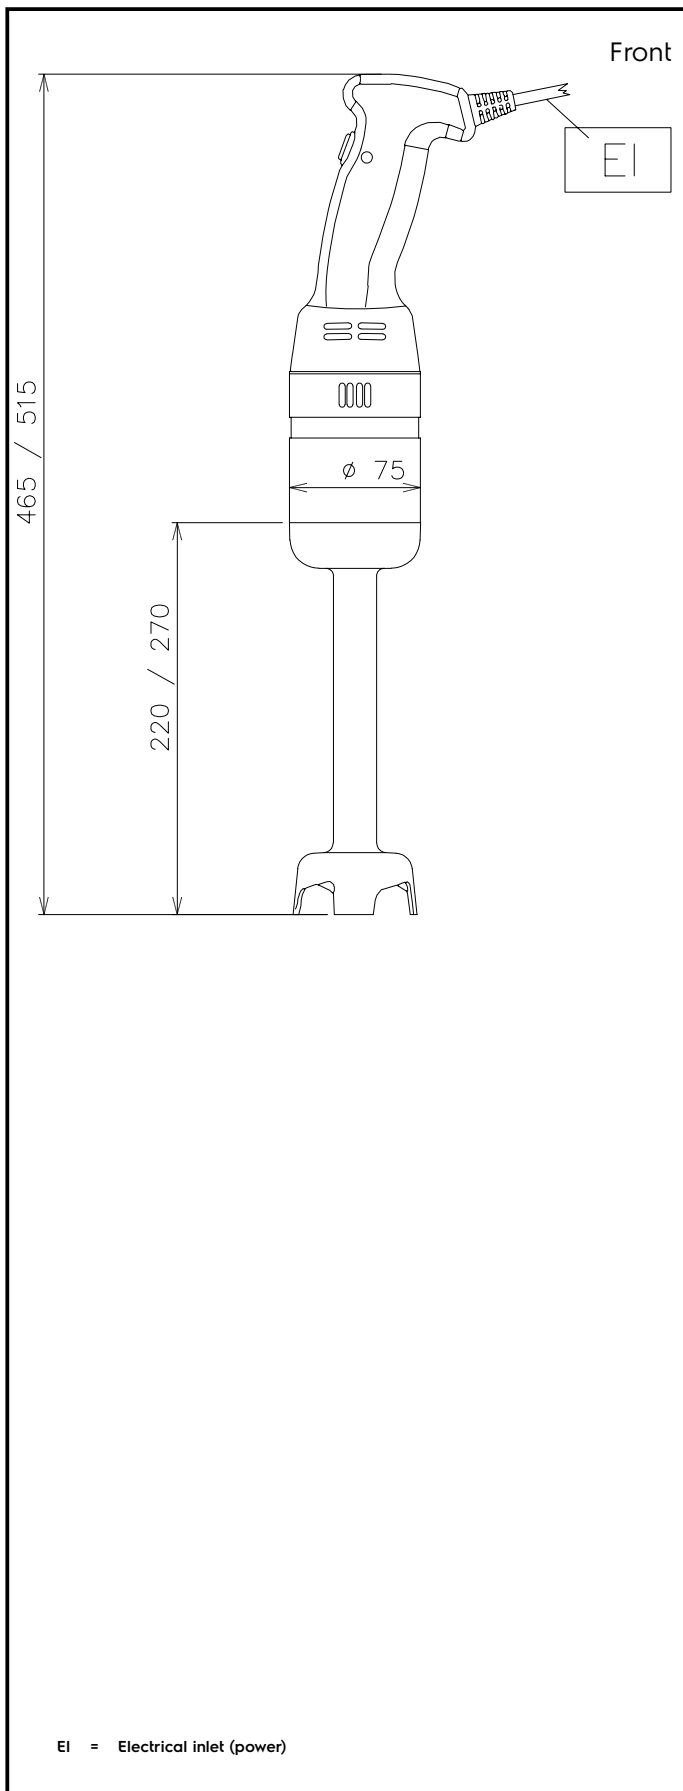

#### Electric

Supply voltage:	230 V/1N ph/50 Hz
Electrical power max.:	0.25 kW
Total Watts:	0.25 kW

#### Key Information:

External dimensions, Width:	110 mm
External dimensions, Depth:	75 mm
External dimensions, Height:	
600021 (SMVT20W25)	470 mm
600022 (SMVT25W25)	520 mm
Shipping weight:	
600021 (SMVT20W25)	1.83 kg
600022 (SMVT25W25)	1.88 kg