

## Hand held Mixers

### Speedy Mixer portable mixer 250 W with Stainless Steel Tube

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



600024 (SMT20W25)

Portable mixer with stainless steel tube 200 mm, 1 speed

600026 (SMT25W25)

Portable mixer with stainless steel tube 250 mm, 1 speed

#### Short Form Specification

Item No. \_\_\_\_\_

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Single speed: 15000 rpm.

#### Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:-Choice of stainless steel tube: 200 mm or 250 mm, depending on model- Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.


#### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Single speed: 15000 rpm.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

#### Optional Accessories

- Whisk tool for speedy mixer PNC 650057 ☐
- - NOT TRANSLATED - PNC 650187 ☐
- - NOT TRANSLATED - PNC 650188 ☐
- - NOT TRANSLATED - PNC 653090 ☐
- - NOT TRANSLATED - PNC 653098 ☐

APPROVAL: \_\_\_\_\_

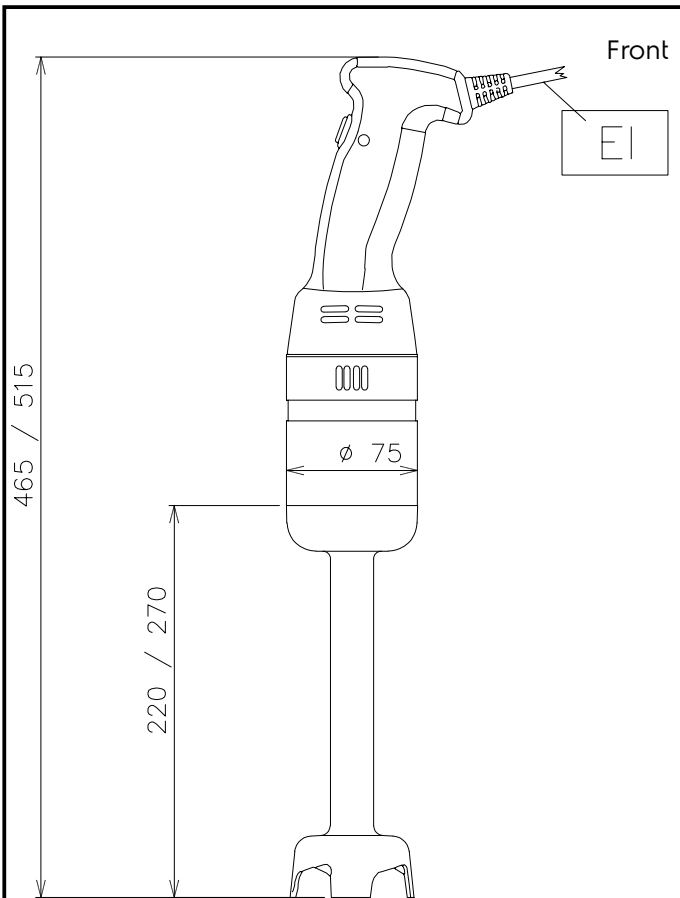

EI = Electrical inlet (power)

### Electric

#### Supply voltage:

600024 (SMT20W25) 230 V/1N ph/50 Hz

600026 (SMT25W25) 230 V/1N ph/50 Hz

Electrical power max.: 0.25 kW

Total Watts: 0.25 kW

### Key Information:

External dimensions, Width: 110 mm

External dimensions, Depth: 75 mm

#### External dimensions, Height:

600024 (SMT20W25) 470 mm

600026 (SMT25W25) 520 mm

#### Shipping weight:

600024 (SMT20W25) 1.8 kg

600026 (SMT25W25) 1.85 kg