

## Hand held Mixers Speedy Mixer portable mixer 250 W with Stainless Steel Tube

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



600024 (SMT20W25)

Portable mixer with stainless steel tube 200 mm, 1 speed

600026 (SMT25W25)

Portable mixer with stainless steel tube 250 mm, 1 speed

# **Short Form Specification**

#### Item No.

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Single speed: 15000 rpm.

#### **Main Features**

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:-Choice of stainless steel tube: 200 mm or 250 mm, depending on model-Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.

### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Single speed: 15000 rpm.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

## Optional Accessories


<ul> <li>Whisk tool for speedy mixer</li> </ul>	PNC 65005/ 🖵
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 650187 🗖
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 650188 🗆
<ul><li>- NOTTRANSLATED -</li></ul>	PNC 653090 🗖
<ul><li>NOTTRANSLATED -</li></ul>	PNC 653098 🗆

#### APPROVAL:





## Hand held Mixers Speedy Mixer portable mixer 250 W with Stainless Steel Tube

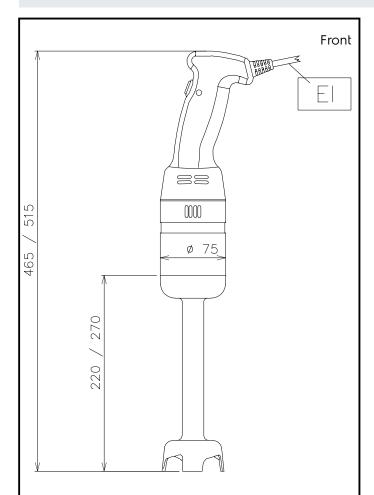

**Electric** 

Supply voltage: 230 V/1N ph/50 Hz

Electrical power max.: 0.25 kW
Total Watts: 0.25 kW

**Key Information:** 

**External dimensions, Width:** 110 mm **External dimensions, Depth:** 75 mm

External dimensions, Height:

**600024 (SMT20W25)** 470 mm **600026 (SMT25W25)** 520 mm

Shipping weight:

**600024 (SMT20W25)** 1.8 kg **600026 (SMT25W25)** 1.85 kg

El = Electrical inlet (power)



