

High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height

| ITEM # | | |
|---------|--|--|
| MODEL # | | |
| NAME # | | |
| SIS # | | |
| AIA# | | |



232218 (SM6B50)

* NOT TRANSLATED *

Main Features

- Curved pan base guarantees that the appliance ia also suitable to prepare small quantities of food.
- Safety valve avoids overpressure of the steam in the jacket.
- Safety thermostat protects against low water level.
- Compliant to CE requirements for safety.
- Constructed to meet the highest hygiene standards.
- Safe thanks to the higher water protection IPX5 and the lower temperature outside the panels.
- Fast working thanks to the high efficient heating technology and well insulation that keeps the heat inside the well.
- High thermal input and fast heat up.
- Isolated upper well rim avoids risk of harm for the
- Food is uniformly heated through the base and side walls of the pan by an indirect heating system which uses integrally generated saturated steam at a temperature of 120°C in a jacket with an automatic deaeration system.
- 600 mm tilting height minimum.
- Electronic control with possibility to store up to 50 programs, large display for easy use and a complete control over the following functions: start, cooking time, temperature and water filling.
- OPTIONS (to be ordered with the machine and must be installed in the factory):CHAR(13)CHAR (10)-Spray gun - integrated spray unit

Construction

- Vessel can be tilted beyond 90° to completely empty the food.
- Motorised tilting.
- Ergonomic and user friendly thanks to the high tilting position and the pouring lip design which allow to easily fill containers.
- Max pressure 1,5 bar.
- Heavy duty, balanced stainless steel lid with sliding plastic cover to insert ingredients. Easy to remove and turn to facilitate cleaning.
- Tilting axis located at the front and upper position of the pan to keep the pouring path short when filling different types of vessels.
- AISI 304 stainless steel construction with AISI 316 stainless steel deep drawn pan with rounded edges.CHAR(13)CHAR(10)

Sustainability



 High-quality thermal insulation of the pan saves energy and keeps operating ambient temperature low.

APPROVAL:






High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height

Optional Accessories

| Strainer 50lt | PNC 928024 | |
|---|--------------------------|--|
| Kit for a correct and easy positioning and installation of 50-100 It pan (for a correct installation you need 2 for each pan) | PNC 928029 | |
| • Floor fastening kit for left leg/column (fastening is integrated in the floor) | PNC 928031 | |
| Floor fastening kit for 50-100 lt right leg/column (fastening is integrated in the floor) | PNC 928032 | |
| Floor fastening kit for left leg/column (fastening on the floor surface) | PNC 928034 | |
| Floor fastening kit for 50-100 lt right leg/column (fastening on the floor surface) | PNC 928035 | |
| Trolley to store tools for 5 boiling pans | PNC 928043 | |
| Trolley to store tools for 2 boiling pans | PNC 928044 | |
| Distance ring for connection (to previous version of pan) | PNC 928049 | |
| Short brush for connection to boiling pan spray unit | PNC 928082 | |
| Long brush for connection to boiling pan spray unit | PNC 928083 | |
| NOTTRANSLATED -NOTTRANSLATED - | PNC 928150 PNC 928151 | |



High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height

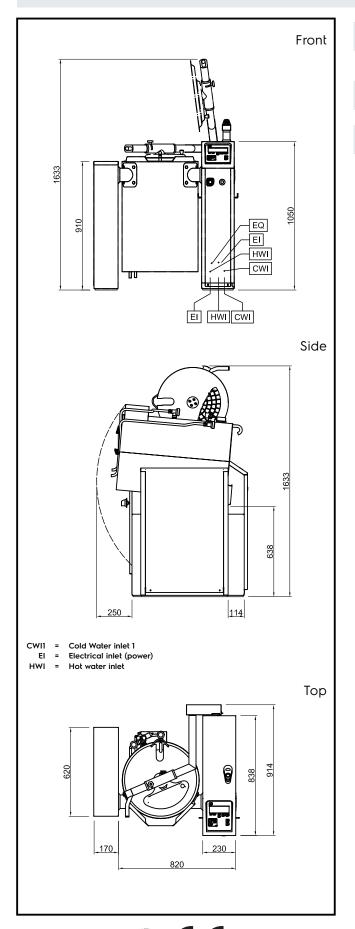

Electric

Supply voltage: 400 V/3N ph/50-60 Hz
Electrical power max.: 15 kW

Installation:

Distance back floor tilted: 638 mm

Key Information:

Working Temperature MIN: 30 °C Working Temperature MAX: 121 °C Vessel (round) diameter: 425 mm Vessel (round) depth: 425 mm 990 mm External dimensions, Width: External dimensions, Depth: 915 mm 1050 mm External dimensions, Height: Net vessel useful capacity: 50 It Tilling mechanism: **Automatic** Bearing: Front

