

## High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



232218 (SM6B50)

\* NOT TRANSLATED \*

#### **Main Features**

- Curved pan base guarantees that the appliance ia also suitable to prepare small quantities of food.
- Safety valve avoids overpressure of the steam in the jacket.
- Safety thermostat protects against low water level.
- Compliant to CE requirements for safety.
- Constructed to meet the highest hygiene standards.
- Safe thanks to the higher water protection IPX5 and the lower temperature outside the panels.
- Fast working thanks to the high efficient heating technology and well insulation that keeps the heat inside the well.
- High thermal input and fast heat up.
- Isolated upper well rim avoids risk of harm for the
- Food is uniformly heated through the base and side walls of the pan by an indirect heating system which uses integrally generated saturated steam at a temperature of 120°C in a jacket with an automatic deaeration system.
- 600 mm tilting height minimum.
- Electronic control with possibility to store up to 50 programs, large display for easy use and a complete control over the following functions: start, cooking time, temperature and water filling.
- OPTIONS (to be ordered with the machine and must be installed in the factory):CHAR(13)CHAR (10)-Spray gun - integrated spray unit

#### Construction

- Vessel can be tilted beyond 90° to completely empty the food.
- Motorised tilting.
- Ergonomic and user friendly thanks to the high tilting position and the pouring lip design which allow to easily fill containers.
- Max pressure 1,5 bar.
- Heavy duty, balanced stainless steel lid with sliding plastic cover to insert ingredients. Easy to remove and turn to facilitate cleaning.
- Tilting axis located at the front and upper position of the pan to keep the pouring path short when filling different types of vessels.
- AISI 304 stainless steel construction with AISI 316 stainless steel deep drawn pan with rounded edges.CHAR(13)CHAR(10)

#### Sustainability



 High-quality thermal insulation of the pan saves energy and keeps operating ambient temperature low.

APPROVAL:






# High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height

## **Optional Accessories**

Strainer 50lt	PNC 928024	
<ul> <li>Kit for a correct and easy positioning and installation of 50-100 It pan (for a correct installation you need 2 for each pan)</li> </ul>	PNC 928029	
• Floor fastening kit for left leg/column (fastening is integrated in the floor)	PNC 928031	
<ul> <li>Floor fastening kit for 50-100 lt right leg/column (fastening is integrated in the floor)</li> </ul>	PNC 928032	
• Floor fastening kit for left leg/column (fastening on the floor surface)	PNC 928034	
<ul> <li>Floor fastening kit for 50-100 lt right leg/column (fastening on the floor surface)</li> </ul>	PNC 928035	
<ul> <li>Trolley to store tools for 5 boiling pans</li> </ul>	PNC 928043	
<ul> <li>Trolley to store tools for 2 boiling pans</li> </ul>	PNC 928044	
<ul> <li>Distance ring for connection (to previous version of pan)</li> </ul>	PNC 928049	
• Short brush for connection to boiling pan spray unit	PNC 928082	
Long brush for connection to boiling pan spray unit	PNC 928083	
<ul><li>NOTTRANSLATED -</li><li>NOTTRANSLATED -</li></ul>	PNC 928150 PNC 928151	



# High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilling height

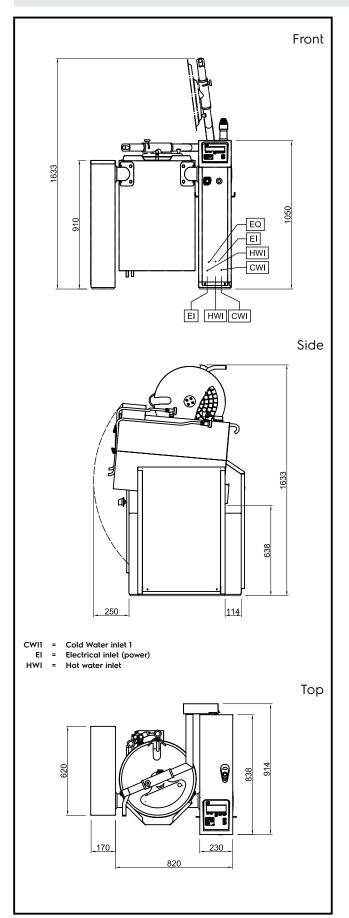

Electric Supply voltage: 400 V/3N ph/50-60 Hz Electrical power max.: 15 kW Installation: Distance back floor tilted: 638 mm

**Key Information:** Working Temperature MIN:

30 °C Working Temperature MAX: 121 °C Vessel (round) diameter: 425 mm Vessel (round) depth: 425 mm 990 mm External dimensions, Width: External dimensions, Depth: 915 mm 1050 mm External dimensions, Height: Net vessel useful capacity: 50 It Tilling mechanism: **Automatic** Bearing: Front

High Productivity Cooking Smart Electric Boiling Pan 50lt, 600mm tilting height



