



**Modular Cooking Range Line
thermaline 80 - 2 X 5 lt Wells
Freestanding Electric Pasta Cooker, 1
Side, H=700**

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



588203 (MAKAEADDAO) 5+5lt electric pasta cooker, one-side operated

Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Appliance which can also be used to cook noodles of every kind, rice, dumplings and vegetables. Water basin in 1.4435 (AISI 316L) stainless steel, with automatic constant water level re-fill and water temperature regulation via sensors. Integrated drip tray to drain baskets. Compatible with automatic basket lifting system to facilitate lifting operations. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX5 water resistant certification.

Configuration: Freestanding, one-side operated.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Constant water level refill.
- Automatic low-water level shut-off: no accidental over-heating.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Easy to clean basin with rounded corners.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Safety systems protect against overtemperature and can be manually reset.
- Automatic water re-fill regulated by water level sensor at maximum volume.
- Water temperature controlled by electronic sensor and can be selected using 5 power levels.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- IPX5 water resistance certification.
- Internal frame for heavy duty sturdiness in stainless steel.

Sustainability



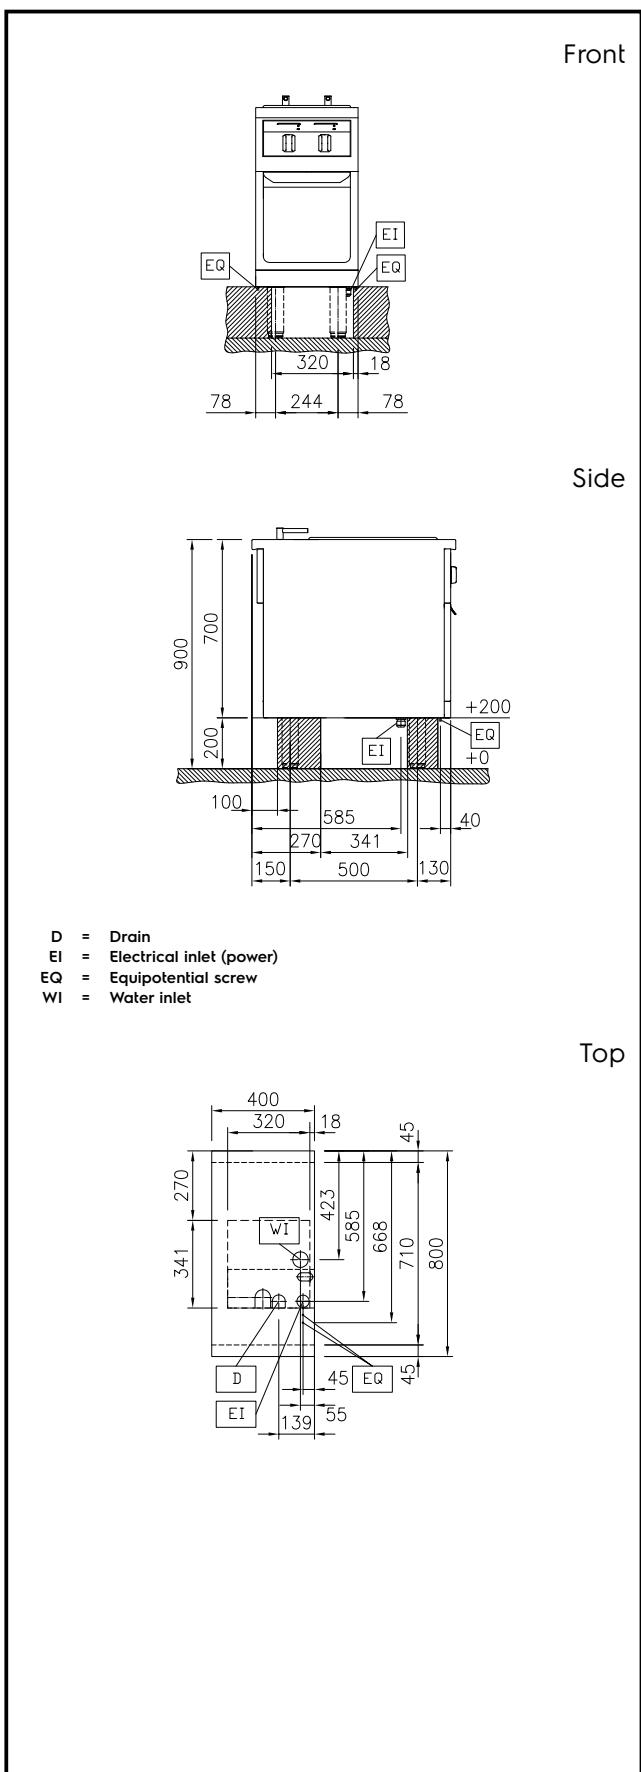
- Standby function for energy saving and fast recovery of maximum power.

Optional Accessories

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com
ELUX_EMAIL


Electric

Supply voltage: 400 V/3N ph/50/60 Hz
Electrical power max.: 5 kW
Total Watts: 5 kW

Water:

Incoming Cold/hot Water line size: 3/4"
Drain line size: 1"

Key Information:

Number of wells: 2
Usable well dimensions (width): 140 mm
Usable well dimensions (height): 225 mm
Usable well dimensions (depth): 345 mm
Well capacity: 4 lt MIN; 5 lt MAX
Thermostat Range: 40 °C MIN; 90 °C MAX
External dimensions, Width: 400 mm
External dimensions, Depth: 800 mm
External dimensions, Height: 700 mm
Net weight: 55 kg
Configuration: On Base; One-Side Operated

Sustainability

Current consumption: 7.2 Amps

Top

Optional Accessories

- Connecting rail kit, 800mm
- Stainless steel side panel, 800x700mm, freestanding
- Portioning shelf, 400mm width
- Portioning shelf, 400mm width
- Folding shelf, 300x800mm
- Folding shelf, 400x800mm
- Fixed side shelf, 200x800mm
- Fixed side shelf, 300x800mm
- Fixed side shelf, 400x800mm
- Stainless steel front kicking strip, 400mm width
- Stainless steel side kicking strip left and right, freestanding, 800mm width
- Stainless steel side kicking strip left and right, back-to-back, 1600mm width
- Stainless steel plinth, freestanding, 400mm width
- Connecting rail kit: modular 80 (on the left) to ProThermic tilting (on the right), ProThermic stationary (on the left) to ProThermic (on the right)
- Connecting rail kit: modular 80 (on the right) to ProThermic tilting (on the left), ProThermic stationary (on the right) to ProThermic (on the left)
- 2 baskets for 2x5lt pasta cooker
- Endrail kit, flush-fitting, left
- Endrail kit, flush-fitting, right
- Lid for 2x5lt pasta cooker
- False bottom for 2x5lt pasta cooker basket
- Endrail kit (12.5mm) for thermaline 80 units, left
- Endrail kit (12.5mm) for thermaline 80 units, right
- - NOT TRANSLATED -
- - NOT TRANSLATED -
- T-connection rail for back-to-back installations without backsplash
- INSERT.PROFILE,D800,TL-OTHER BRANDS
- - NOT TRANSLATED -

PNC 912500	<input type="checkbox"/>	• FILTER W=400MM	PNC 913663	<input type="checkbox"/>
PNC 912509	<input type="checkbox"/>	• STAINLESS STEEL DIVIDING PANEL 800X700MM LEFT/RIGHT	PNC 913668	<input type="checkbox"/>
PNC 912522	<input type="checkbox"/>	• STAINLESS STEEL SIDE PANEL, FLUSH 800X700MM LEFT/RIGHT	PNC 913684	<input type="checkbox"/>
PNC 912552	<input type="checkbox"/>			
PNC 912577	<input type="checkbox"/>			
PNC 912578	<input type="checkbox"/>			
PNC 912583	<input type="checkbox"/>			
PNC 912584	<input type="checkbox"/>			
PNC 912585	<input type="checkbox"/>			
PNC 912630	<input type="checkbox"/>			
PNC 912655	<input type="checkbox"/>			
PNC 912661	<input type="checkbox"/>			
PNC 912859	<input type="checkbox"/>			
PNC 912971	<input type="checkbox"/>			
PNC 912972	<input type="checkbox"/>			
PNC 913034	<input type="checkbox"/>			
PNC 913109	<input type="checkbox"/>			
PNC 913110	<input type="checkbox"/>			
PNC 913150	<input type="checkbox"/>			
PNC 913158	<input type="checkbox"/>			
PNC 913200	<input type="checkbox"/>			
PNC 913201	<input type="checkbox"/>			
PNC 913214	<input type="checkbox"/>			
PNC 913215	<input type="checkbox"/>			
PNC 913227	<input type="checkbox"/>			
PNC 913244	<input type="checkbox"/>			
PNC 913249	<input type="checkbox"/>			
PNC 913250	<input type="checkbox"/>			
PNC 913253	<input type="checkbox"/>			
PNC 913254	<input type="checkbox"/>			
PNC 913258	<input type="checkbox"/>			
PNC 913271	<input type="checkbox"/>			
PNC 913272	<input type="checkbox"/>			

