Electrolux

Modular Cooking Range Line thermaline 85 - 500 mm Closed Work top, 1 Side with Backsplash



588564 (MBNABBEOOO)

Closed work top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 500 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

ITEM #

SIS #

AIA #

MODEL # NAME #

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Optional Accessories

• Portioning shelf, 500mm width

- Connecting rail kit for appliances PNC 912498 with backsplash, 850mm PNC 912523
- PNC 912553 • Portioning shelf, 500mm width • Folding shelf, 300x850mm PNC 912579 • Folding shelf, 400x850mm PNC 912580 • Fixed side shelf, 200x850mm PNC 912586 • Fixed side shelf, 300x850mm PNC 912587 Fixed side shelf, 400x850mm PNC 912588 • Back panel, 500x700mm, for tops PNC 913010 and units with backsplash Endrail kit, flush-fitting, with PNC 913115 backsplash, left Endrail kit, flush-fitting, with PNC 913116 • backsplash, right
- Endrail kit (12.5mm) for thermaline PNC 913206 85 units with backsplash, left
- Endrail kit (12.5mm) for thermaline PNC 913207 85 units with backsplash, right
- U-clamping rail for back-to-back PNC 913226 installations with backsplash PNC 913231
- NOT TRANSLATED -
- SIDE PANEL TL85 WALL MOUNT. PNC 913632 🗅 • (L) H400
- SIDE PANEL TL85 WALL MOUNT. PNC 913633 🛛 (R) H400
- SIDEPANEL TL85 WALLMOUNT PNC 913634 (L)H400,FLUSHFIT
- SIDE PANEL TL85 WALL MOUNT. PNC 913635 (R) H400,FL
- ADD. WALL MOUNT. FIXATION PNC 913640 USA
- TL85/90 WALL MOUNTING KIT PNC 913649 • TOP 500MM

APPROVAL:




Experience the Excellence www.electroluxprofessional.com professional@electrolux.com



Modular Cooking Range Line thermaline 85 - 500 mm Closed Work top, 1 Side with Backsplash

Key Information:

External dimensions, Width:588564 (MBNABBEOOO)500 mmExternal dimensions, Depth:850 mmExternal dimensions, Height:250 mmNet weight:18 kg

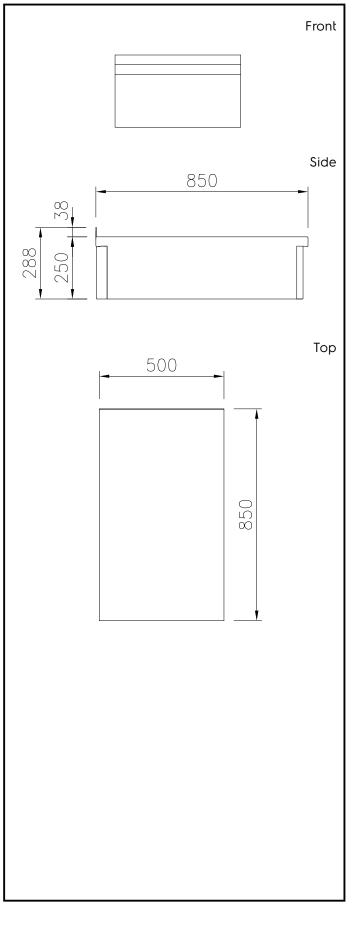

Modular Cooking Range Line thermaline 85 - 500 mm Closed Work top, 1 Side with Backsplash

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.