Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 500 mm Closed Work top, 1 Side with Backsplash



589159 (MCNABBEOOO)

Closed work top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 500 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

ITEM # MODEL # NAME # SIS # AIA

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances PNC 912499 with backsplash, 900mm
- Portioning shelf, 500mm width PNC 912523
- Portioning shelf, 500mm width PNC 912553
- Folding shelf, 300x900mm PNC 912581
- Folding shelf, 400x900mm PNC 912582
- Fixed side shelf, 200x900mm PNC 912589
- Fixed side shelf, 300x900mm PNC 912590
- Fixed side shelf, 400x900mm PNC 912591
- Connecting rail kit for appliances PNC 912981 with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)
- Connecting rail kit for appliances PNC 912982 with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)
- Back panel, 500x700mm, for tops PNC 913010 and units with backsplash
- Back panel, 500x800mm, for tops PNC 913023 and units with backsplash
- Endrail kit, flush-fitting, with PNC 913117 Dacksplash, left
- Endrail kit, flush-fitting, with PNC 913118
 backsplash, right
- Endrail kit (12.5mm) for thermaline PNC 913208 90 units with backsplash, left
- Endrail kit (12.5mm) for thermaline PNC 913209 90 units with backsplash, right
- U-clamping rail for back-to-back PNC 913226 installations with backsplash
- - NOTTRANSLATED PNC 913232
- SIDE PANEL TL90 WALL MOUNT. PNC 913636 □ (L) H400

APPROVAL:






- SIDE PANEL TL90 WALL MOUNT. (R) PNC 913637 H400
- SIDE PANEL TL90 WALL MOUNT. (L) PNC 913638

- SIDE PANEL TL90 WALL MOUNT. (R) PNC 913639 □ H400,FL
- ADD. WALL MOUNT. FIXATION USA PNC 913640
- TL85/90 WALL MOUNTING KIT TOP PNC 913649



Modular Cooking Range Line thermaline 90 - 500 mm Closed Work top, 1 Side with Backsplash

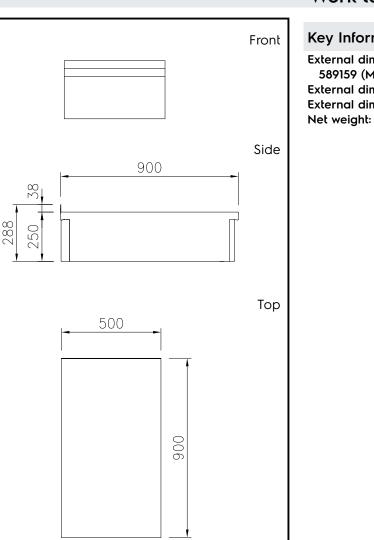

External dimensions, Width: 589159 (MCNABBEOOO) 500 mm External dimensions, Depth: 900 mm External dimensions, Height: 250 mm 23 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.