

Modular Cooking Range Line thermaline 90 - 1000 mm Closed Work top, 1 Side with Backsplash

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA "	



589169 (MCNABBJOOO)

Closed work top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 1000 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Optional Accessories			
 Connecting rail kit for appliances with backsplash, 900mm 	PNC	912499	
Portioning shelf, 1000mm width	PNC	912528	
 Portioning shelf, 1000mm width 	PNC	912558	
 Folding shelf, 300x900mm 	PNC	912581	
 Folding shelf, 400x900mm 	PNC	912582	
 Fixed side shelf, 200x900mm 		912589	
 Fixed side shelf, 300x900mm 		912590	
 Fixed side shelf, 400x900mm 		912591	
 Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) 	PNC	912981	
 Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) 	PNC	912982	
Back panel, 1000x700mm, for tops and units with backsplash	PNC	913015	
 Back panel, 1000x800mm, for tops and units with backsplash 	PNC	913028	
 Endrail kit, flush-fitting, with backsplash, left 	PNC	913117	
 Endrail kit, flush-fitting, with backsplash, right 	PNC	913118	
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PNC	913208	
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC	913209	
 U-clamping rail for back-to-back installations with backsplash 	PNC	913226	
• - NOTTRANSLATED -	PNC	913232	

SIDE PANELTL90 WALL MOUNT. PNC 913636

(L) H400

APPROVAL:






Modular Cooking Range Line thermaline 90 - 1000 mm Closed Work top, 1 Side with Backsplash

 SIDE PANEL TL90 WALL MOUNT. (R) H400 	PNC 913637	
 SIDE PANEL TL90 WALL MOUNT. (L) H400,FL 	PNC 913638	
• SIDE PANEL TL90 WALL MOUNT. (R) H400,FL	PNC 913639	
 ADD. WALL MOUNT. FIXATION USA 	PNC 913640	
TL85/90 WALL MOUNTING KIT - TOP 1000MM	PNC 913654	



Modular Cooking Range Line thermaline 90 - 1000 mm Closed Work top, 1 Side with Backsplash

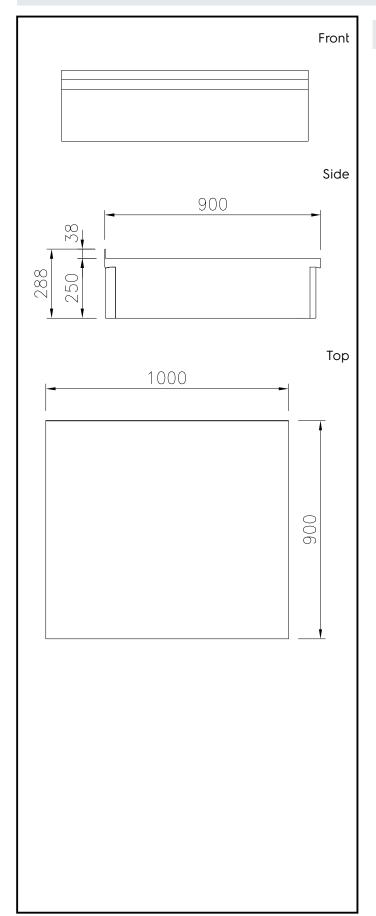

Key Information:

External dimensions, Width:

589169 (MCNABBJOOO)1000 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:34 kg

Modular Cooking Range Line thermaline 90 - 1000 mm Closed Work top, 1 Side with Backsplash