Electrolux PROFESSIONAL

ecostore Premium 1 Door Digital Refrigerator, 670lt (-2/+10) - Remote

ITEM #

MODEL #

NAME #

SIS #

AIA #



727251 (ESP71FRR) 1-door Refrigerator 670lt, -2+10°C, digital, AISI 304, remote

Short Form Specification

Item No.

Full door refrigerator entirely constructed in 304 AISI stainless steel with bottom panel in anti-corrosive material. Large digital white-digit display with cabinet temperature display and setting, and possibility to select the desired levels of humidity. HACCP-compliant control with alarms and history. Frost Watch Control to defrost only when required with automatic evaporation of defrost water. Optiflow: back to front forced air flow and removable air conveyors provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Remote refrigeration unit; ventilated operation; Internal LED light. Supplied with n. 4x2/1GN Rilsan coated grids and n. 4 sets of 2 stainless steel grid runners. Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

APPROVAL:

Main Features

- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optiflow: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Internal structure with 44 charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Possibility to select 3 different levels of humidity according with the type of food stored inside.
- Performance guaranteed at ambient temperatures of +40°C (Climatic class 5).
- Tropicalized unit.

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with rounded corners, pressed from a single sheet.
- The rounded internal corners, the easily removable runners, grids and air conveyors allow for ease of cleaning and high hygiene standards.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Refrigerant type: R134a.
- Remote refrigeration unit.

User Interface & Data Management

- Electrolux Professional Fridge Control APP make the life easier for our customers:
  - Monitor safety of preservation process thanks to HACCP data & alarms for precise control
  - Save time and easy data management having the
- Large digital white-digit display with cabinet temperature display and setting, and possibility to select the desired levels of humidity. Bluetooth technology included allows to keep HACCP historical data and download them through the app.
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Sustainability

- Interior LED light to save energy and for best internal visibility.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Improved defrost and evaporator fan management – defrost type changes with temperature set-point: electric below +2° C while air convection defrost above +2°C, thus saving energy.
- Frost Watch Control: fully automatic defrost starts only when ice is actually building-up in the evaporator and adapt the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.
- The label complies with the delegated regulation (UE) 2015/1094 of the commission of 5th may 2015.
- Cabinet certified as Class A in heavy duty working conditions (40°C-40% humidity) based on European Ecodesign directive.

Included Accessories

• 4 of 2/1GN grey rilsan grid with 2 runners	PNC 881020	

Optional Accessories


• Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a	PNC 880231	❑
• 2 stainless steel runners for refrigerated cabinets - (Marine)	PNC 880242	❑
• Set of 8 GN1/1 PVC containers for fish	PNC 880243	❑
• Spacer for 670 lt and 1430 lt refrigerated cabinets	PNC 880248	❑
• Pedal opening for cabinets	PNC 880324	❑
• 1/1GN plastic container with false bottom	PNC 880705	❑
• Kit of 10 pairs of runners and 4 tray supports to fit pastry trays (400x600mm)	PNC 881003	❑
• 2/1GN grey rilsan grid	PNC 881004	❑
• 2/1GN aisi 304 stainless steel grid	PNC 881016	❑
• 2/1GN 304 AISI stainless steel grid with 2 runners	PNC 881018	❑
• Meat rail for 670/1430lt refrigerators with 4 hooks	PNC 881019	❑
• Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers	PNC 881021	❑
• 2/1GN pvc container with lid and 2 runners	PNC 881039	❑
• 2/1GN perforated shelf	PNC 881042	❑
• 1/1GN rilsan steel wire basket h=150mm	PNC 881043	❑
• 2/1GN grey rilsan basket+2 runners h=150mm	PNC 881047	❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2026.11.04

ecostore Premium
1 Door Digital Refrigerator, 670lt (-2/+10) - Remote

Front

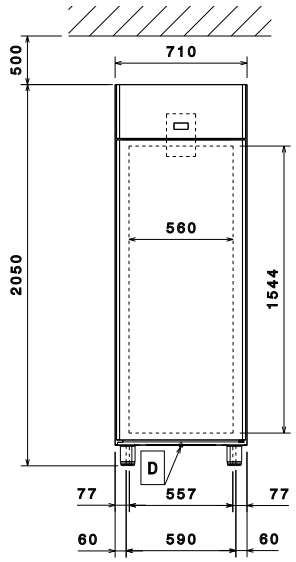


Side

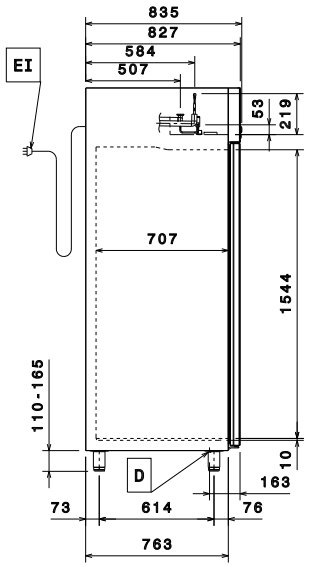

ED = Remote electrical connection
EI = Electrical inlet (power)
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top



Electric

Supply voltage:	220-240 V/1 ph/50/60 Hz

Capacity:

Number and type of grids (included):	4 - GN 2/1

Key Information:

Door hinges:	
External dimensions, Width:	710 mm
External dimensions, Depth:	835 mm
External dimensions, Depth with Doors Open:	1480 mm
External dimensions, Height:	2050 mm
Number and type of doors:	1 Full
Type of external material:	304 AISI
Type of internal material:	304 AISI
Number of positions & pitch:	44; 30 mm
Gross capacity:	670 lt

Refrigeration Data

Operating temperature min.:	-2 °C
Refrigeration type:	R134a;R513A;R426A
Operating mode:	Ventilated
Suggested refrigeration power:	412 W
Condition at evaporation temperature:	-10 °C
Condition at condensation temperature:	55 °C
Condition at ambient temperature:	43 °C
Connection pipes (remote) - outlet:	9.5 mm
Connection pipes (remote) - inlet:	6 mm
***Note:**	Ref. Power calculated at a linear distance of 15 mt (piping)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.11.04