


Standard Preparation
1200 mm Cupboard Sink for
Dishwasher with 1 Bowl & Right Drainer

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

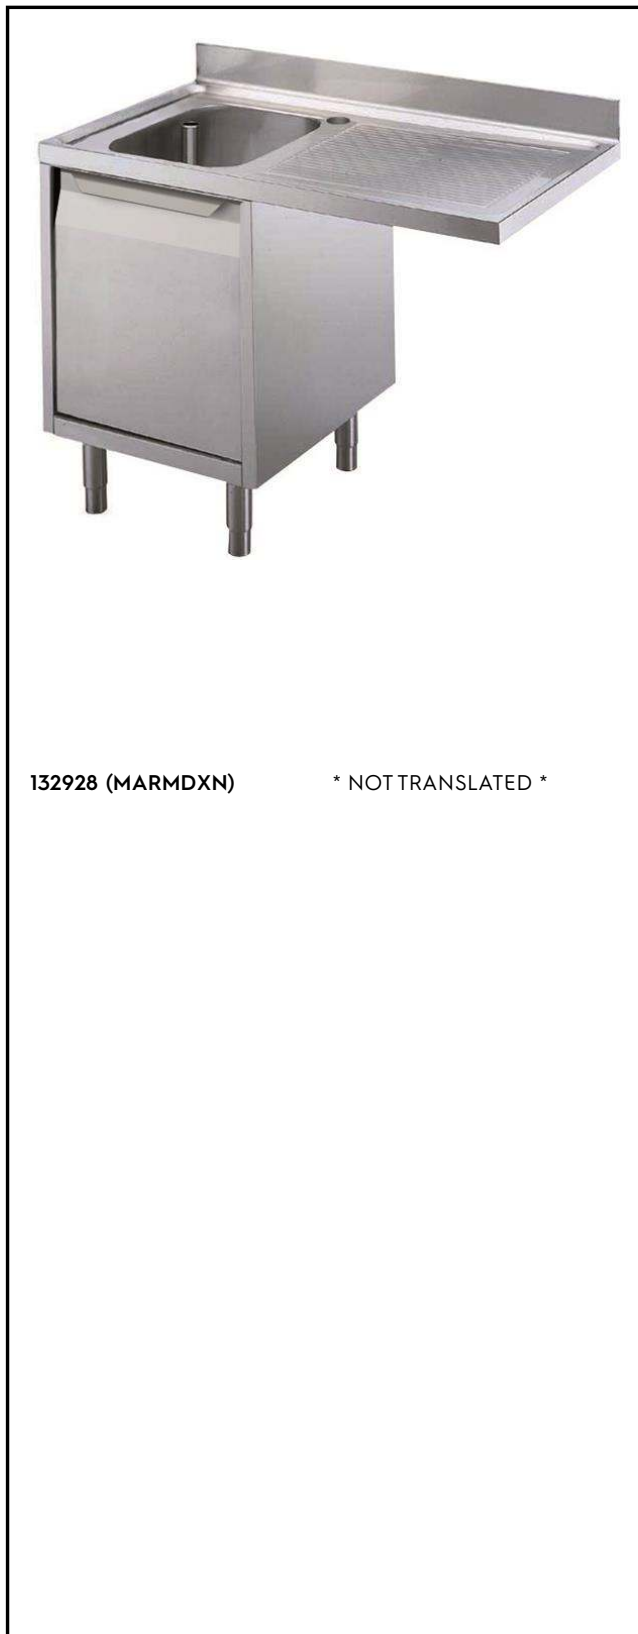

132928 (MARMDXN)

* NOT TRANSLATED *

Main Features

- Sturdiness, stability and reliability of table accurately tested.

Construction

- 50 mm worktop in 304 AISI stainless steel with upturned edges, incorporates an 18 mm layer of sound deadening material.
- Reinforced side and base panel in 304 AISI stainless steel.
- 304 AISI stainless steel feet, 200 mm high and 54 mm in diameter, adjustable by -50/+30 mm.
- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Drainage area suitable for drying operations
- 100 mm upstand with 10 mm radiused corner and 13 mm deep.
- Entirely constructed in stainless steel.
- Bottom part of drain left free to house an undercounter dishwasher.
- Hinged door with sound deadening internal panels, fitted with 304 AISI stainless steel hinges on the inner sides.
- Wide range of taps are available to suit every need.

Optional Accessories

- - NOT TRANSLATED - PNC 855299 ☐
- Elbow operated mixer tap with PNC 855322 ☐
spout 3/4", single hole
- Elbow operated mixer tap with PNC 855323 ☐
short spout 3/4", single hole
- Foot operated mixer tap (hot and cold) with spout 3/4" PNC 855328 ☐
- Single plastic drain syphon 2" PNC 895313 ☐

APPROVAL: _____



Cabinet width:	1145 mm
Cabinet depth:	645 mm
Cabinet height:	385 mm
External dimensions, Width:	1200 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	1000 mm
Upstand Dimensions, Height:	100 mm
Upstand Dimensions, Depth:	13 mm
Upstand Dimensions, Radius:	R=10
Bowls number	1
Bowl dimensions	400x500xH300
Number and type of doors:	1 Hinged
Worktop thickness:	50 mm
Net weight:	55 kg

Technical drawing of a rectangular box with dimensions and internal structure. The overall dimensions are 689 (width) x 900 (height) x 440 (depth). The top surface has a 13x100mm area with a R10 fillet. The internal structure is shown with red dashed lines, indicating a central vertical channel and side channels. The bottom surface has two circular openings, each 77.5mm in diameter, spaced 508.8mm apart, with a 102.6mm margin from the right edge. The side walls are 5.5mm thick. The internal height of the main compartment is 552mm. The bottom flange has a width of 199mm.

2025.06.29