

Crosswise Convection Gas Convection Oven, 10 GN1/1

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



260819 (EFCG11CSAS)

* NOT TRANSLATED *

Main Features

- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Rapid cooling of oven cavity.
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Maximum temperature of 300°C.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- Food temperature probe (available as accessory).
- Drip tray to collect residual cooking juices and fat.
- Drip tray under the door to collect condensed liquid available as accessory.
- Capacity: 10 GN 1/1 trays.

Construction

- Robust structure thanks to stainless steel construction.
- Cooking chamber in 430 AISI stainless steel.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Ergonomic door handle.
- Integrated drain outlet.
- 1 pair of 60 mm pitch runners is supplied as standard.
- IPx4 water protection.

Included Accessories

 1 of 60mm pitch side hangers 10x1/1GN gas oven (included with the oven)
 PNC 922122

Optional Accessories

- Pair of 1/1GN AISI 304 stainless PNC 921101
 steel grids
- Support for 1/2GN pan (2pcs) PNC 921106 ☐
- Fat filter for gas 10 and 20 1/1 and PNC 921700
 2/1 GN ovens (2 filters are necessary for 20-grid ovens)
- Flue condenser for gas ovens 10x1/1-2/1
 PNC 921701 □
- Probe for ovens 6 and 10x1/1GN PNC 921702 🖵
- Guide kit for 1/1GN drain pan PNC 921713 ☐
- Pair of AISI 304 stainless steel PNC 922017 ☐ grids, GN 1/1
- Pair of grids for whole chicken (8 PNC 922036 ☐ per grid - 1,2kg each), GN 1/1
- AISI 304 stainless steel grid, GN PNC 922062 1/1







Crosswise Convection Gas Convection Oven, 10 GN1/1

• Base for oven 10x1/1GN	PNC 922102	
 Shelf guides for 10x1/1GN, ovens base 	PNC 922106	
• Base on castors for 10x1/1GN ovens	PNC 922114	
• 80mm pitch side hangers 10x1/1GN	PNC 922116	
gas oven		
 60mm pitch side hangers 10x1/1GN gas oven (included with the oven) 	PNC 922122	
 Feet for ovens 6x1/1GN, 10x1/1 and 2/1GN 	PNC 922127	
Trolley for 10x2/1GN roll-in rack	PNC 922128	
Trolley for 10x1/1GN roll-in rack	PNC 922130	
Retractable hose reel spray unit	PNC 922170	
External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	
Fat filter for 10 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric)	PNC 922178	
• Kit to convert to 10x1/1GN roll-in rack	PNC 922201	
Pair of frying baskets	PNC 922239	
 Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 	PNC 922266	
 Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens 	PNC 922325	
Universal skewer rack	PNC 922326	
6 short skewers	PNC 922328	
• Smoker for lengthwise and crosswise	PNC 922338	
oven (4 kinds of smoker wood chips are available on request)		
• - NOTTRANSLATED -	PNC 922431	
 Mesh grilling grid 	PNC 922713	
 Non-stick universal pan, GN 1/1, H=20mm 	PNC 925000	
 Non-stick universal pan, GN 1/1, H=40mm 	PNC 925001	
• Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	
Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003	
Aluminum grill, GN 1/1	PNC 925004	
 Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 	PNC 925005	_














Crosswise Convection Gas Convection Oven, 10 GN1/1

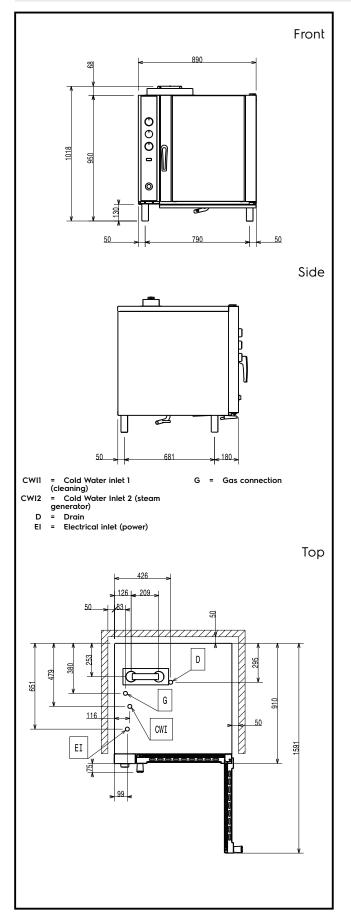

Electric Supply voltage: 220-230 V/1 ph/50 Hz 0.35 kW **Auxiliary**: Electrical power max.: 0.35 kW Gas Gas Power: 18.5 kW Capacity: Trays type: 10 (GN 1/1)

Key Information:

External dimensions, Width: 890 mm External dimensions, Depth: 900 mm 970 mm External dimensions, Height: Net weight: 136 kg Functional level: Basic Cooking cycles - air-convection: 300 °C

Internal dimensions, Width: 590 mm Internal dimensions, Depth: 479 mm Internal dimensions, Height: 680 mm

Crosswise Convection Gas Convection Oven, 10 GN1/1









