

## Drop-In Drop-in bain-marie, with one well (3 GN container capacity)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341001 (D01H3)

\* NOT TRANSLATED \*

### Main Features

- Electronic overheating protection.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Automatic water refill guarantees constant heating performances and prevent unit breakage.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanliness and suitable for modern design installations.
- Available drop-in dimensions: 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

### Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPx4 water protection.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.

### Sustainability



- Etched foil heating elements to maximize heat transmission for reduced warm-up times.
- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.


APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## Drop-In Drop-in bain-marie, with one well (3 GN container capacity)

Rear side

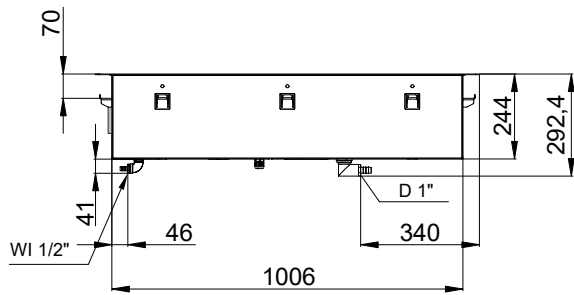


Side



D = Drain  
EI = Electrical inlet (power)  
WI = Water inlet

Top

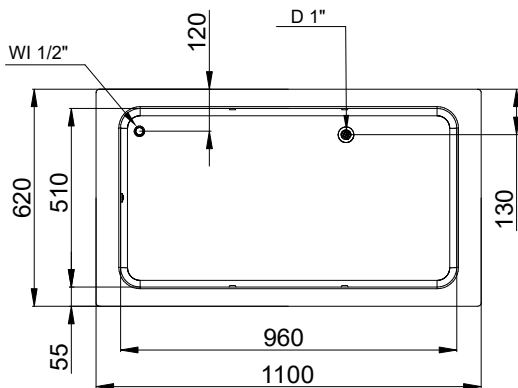

Drop-In  
Drop-in bain-marie, with one well (3 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.14

**Electric**

Supply voltage:	220-240 V/1N ph/50/60 Hz
Electrical power max.:	2.02 kW

**Water:**


Drain line size:	1"
Water inlet "CW" connection:	1/2"

**Key Information:**


External dimensions, Width:	1100 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	260 mm
Net weight:	28.3 kg
Shipping weight:	52 kg
Shipping height:	520 mm
Shipping width:	660 mm
Shipping depth:	1140 mm
Shipping volume:	0.39 m <sup>3</sup>
Set temperature:	+85 / +95 °C

**Sustainability**


Noise level:	0 dBA
--------------	-------

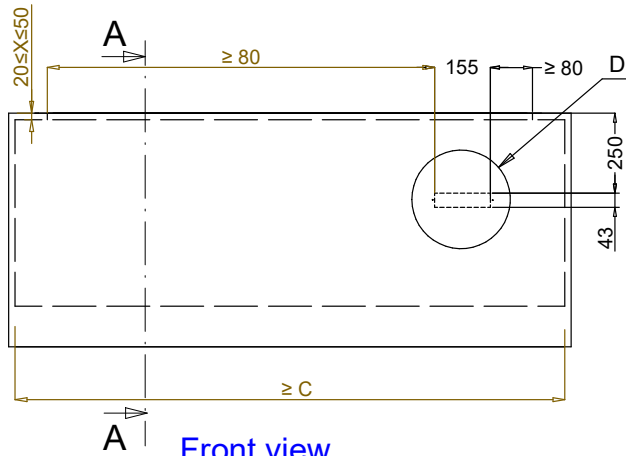


**Front view**  
**Scala: 1:10**




**Dettaglio D**  
**Scala 1:7**



**Dettaglio B**  
**Scala 1:2**


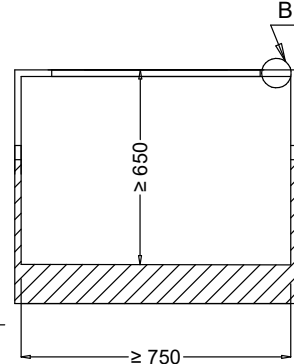


**Section Cut A-A**  
**Scala: 1:10**

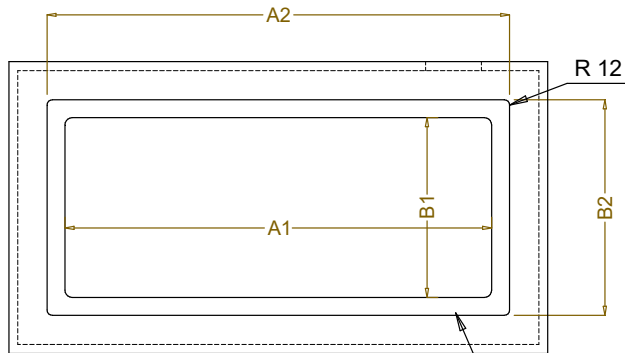

**Top view**  
**Scala: 1:10**

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C
	A1	B1	A2	B2	
2GN	700	580	774	624	880
3GN	1030		1104		1200
4GN	1350		1424		1530
5GN	1670		1744		1850
6GN	2000		2074		2180

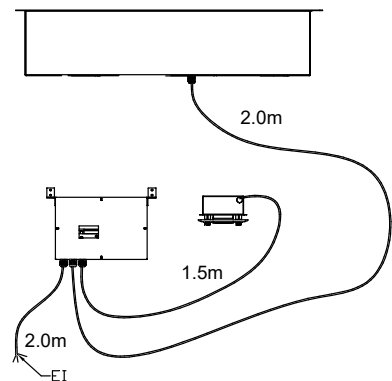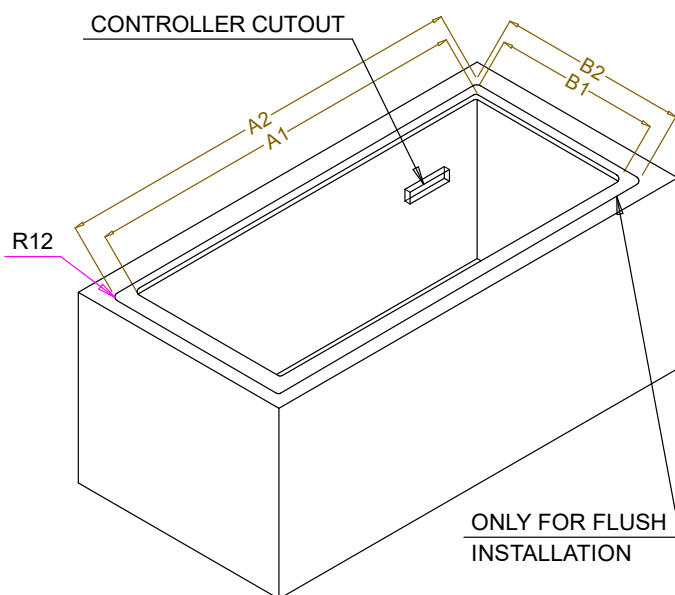

**595T01N00 - WATER BAIN MARIE SINGLE WELL**