

Drop-In Drop-in bain-marie, with one well (4 GN container capacity)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



341002 (D01H4)

* NOT TRANSLATED *

Main Features

- Electronic overheating protection.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Automatic water refill guarantees constant heating performances and prevent unit breakage.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanliness and suitable for modern design installations.
- Available drop-in dimensions: 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPx4 water protection.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.


Sustainability




- Etched foil heating elements to maximize heat transmission for reduced warm-up times.
- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.

APPROVAL: _____

Side





Top

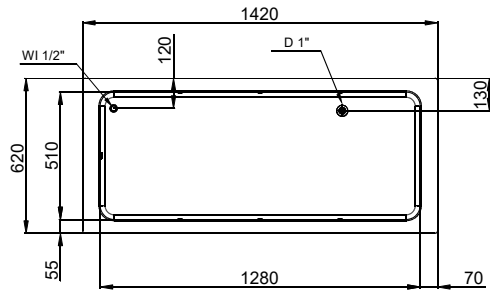

D = Drain
EI = Electrical inlet (power)
WI = Water inlet

Other

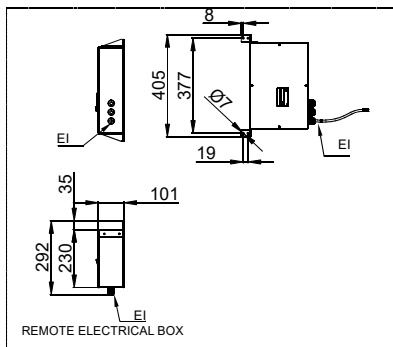

Electric

Supply voltage:	220-240 V/1N ph/50/60 Hz
Electrical power max.:	3.02 kW

Water:

Drain line size:	1"
Water inlet "CW" connection:	1/2"

Key Information:

External dimensions, Width:	1420 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	260 mm
Net weight:	34.6 kg
Shipping weight:	60 kg
Shipping height:	380 mm
Shipping width:	660 mm
Shipping depth:	1460 mm
Shipping volume:	0.37 m ³
Set temperature:	+85 / +95 °C

Sustainability


Noise level:	0 dBA
--------------	-------




Front view
Scala: 1:10



Dettaglio D
Scala 1:7



Dettaglio B
Scala 1:2

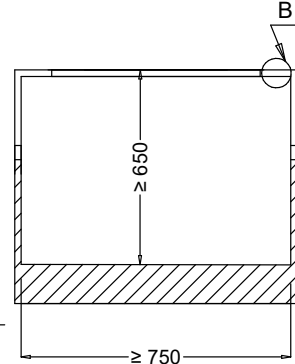

Section Cut A-A
Scala: 1:10




Top view
Scala: 1:10

**ONLY FOR FLUSH
INSTALLATION**

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C
	A1	B1	A2	B2	
2GN	700	580	774	624	880
3GN	1030		1104		1200
4GN	1350		1424		1530
5GN	1670		1744		1850
6GN	2000		2074		2180



**ONLY FOR FLUSH
INSTALLATION**

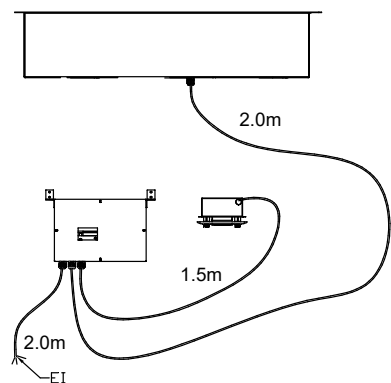

595T01N00 - WATER BAIN MARIE SINGLE WELL