

## Drop-In Drop-in tempered glass top (1 GN container capacity)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341014 (D04H1)

\* NOT TRANSLATED \*

### Main Features

- Electronic overheating protection.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to serve the food in plates, casseroles, pans
- It comes with stylish black coloured tempered heated glass with integrated etched foil elements and stainless steel framed.
- Special design etched foil heating elements to maximize heat transmission on the surface for having the same temperature on the whole surface.
- Ideal for elegant buffet to display warm food, such as pizza, bun, etc. thanks to the extended surface top.CHAR(13)CHAR(10)
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Available drop-in dimensions: 1, 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

### Construction

- Electronic control with temperature display.
- AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations
- IPx4 water protection.
- Heating elements connected to the bottom include safety thermostat.


APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

**Drop-In**  
**Drop-in tempered glass top (1 GN**  
**container capacity)**

Rear side

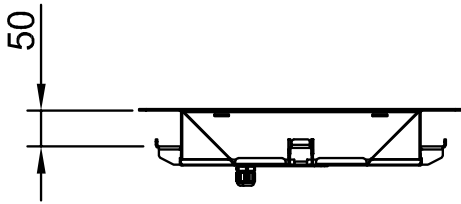


Side

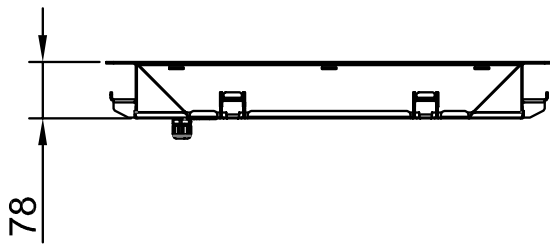

EI = Electrical inlet (power)

Top

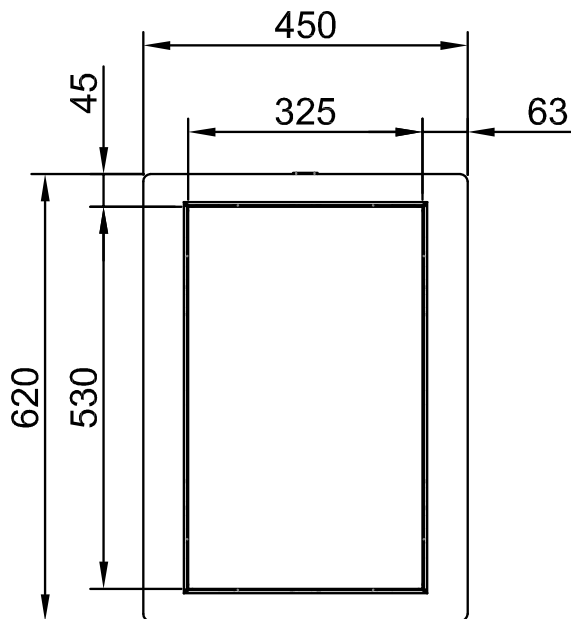

**Drop-In**  
**Drop-in tempered glass top (1 GN container capacity)**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.06



**Electrolux**  
PROFESSIONAL

## Drop-In Drop-in tempered glass top (1 GN container capacity)

### Electric

|                        |                          |
|------------------------|--------------------------|
| Supply voltage:        | 220-240 V/1N ph/50/60 Hz |
| Electrical power max.: | 0.31 kW                  |

### Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 450 mm              |
| External dimensions, Depth:  | 620 mm              |
| External dimensions, Height: | 80 mm               |
| Net weight:                  | 8.3 kg              |
| Shipping weight:             | 22 kg               |
| Shipping height:             | 200 mm              |
| Shipping width:              | 490 mm              |
| Shipping depth:              | 660 mm              |
| Shipping volume:             | 0.06 m <sup>3</sup> |
| Set temperature:             | +105 / +115 °C      |

### Sustainability






|              |       |
|--------------|-------|
| Noise level: | 0 dBA |
|--------------|-------|





Drop-In  
Drop-in tempered glass top (1 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.06

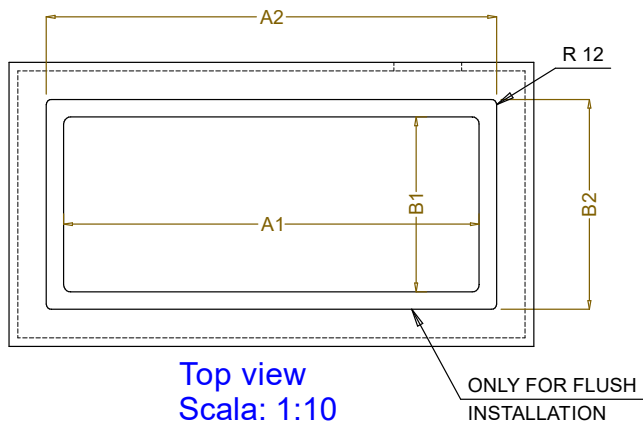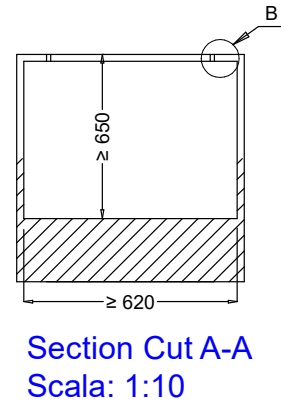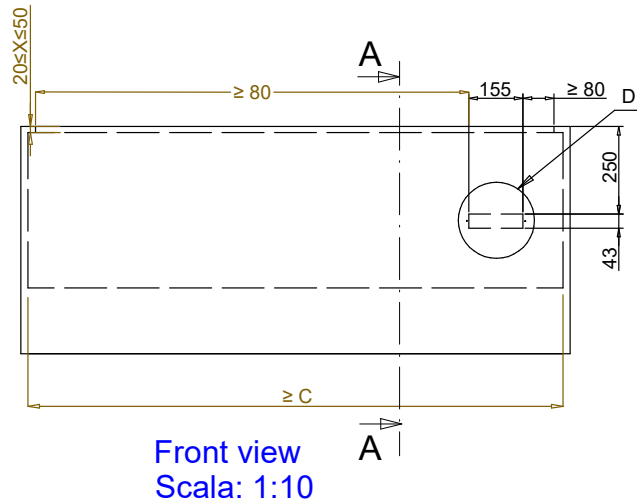

| CAPACITY | CUTOUT |     | LOWERING FOR FLUSH INSTALLATION |     | C    |
|----------|--------|-----|---------------------------------|-----|------|
|          | A1     | B1  | A2                              | B2  |      |
| 1GN      | 355    | 560 | 454                             | 624 | 535  |
| 2GN      | 680    |     | 774                             |     | 855  |
| 3GN      | 1010   |     | 1104                            |     | 1190 |
| 4GN      | 1330   |     | 1424                            |     | 1510 |
| 5GN      | 1660   |     | 1744                            |     | 1835 |
| 6GN      | 1985   |     | 2074                            |     | 2165 |

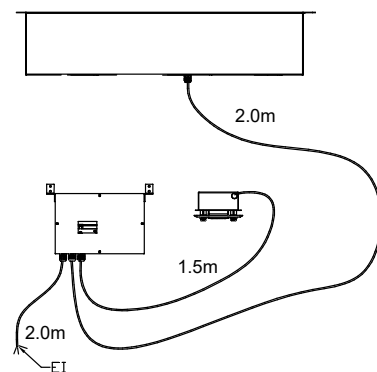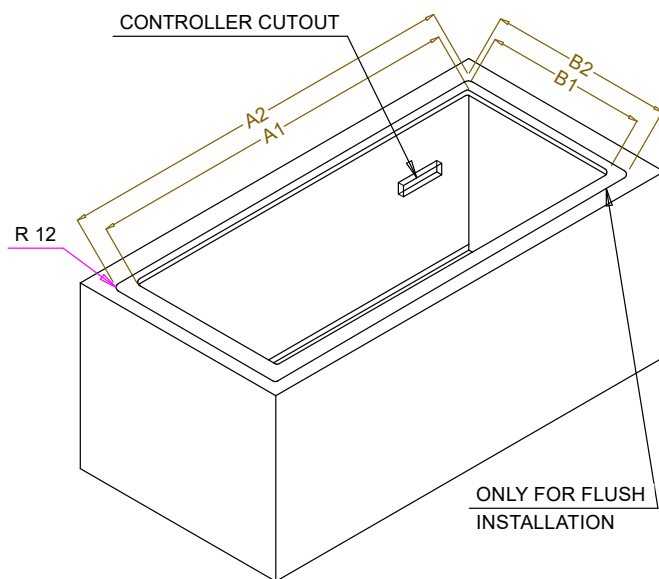

**595T01T00 - HOT TEMPERED GLASS**