

Drop-In Drop-in tempered glass top (4 GN container capacity)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



341017 (D04H4)

* NOT TRANSLATED *

Main Features

- Electronic overheating protection.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to serve the food in plates, casseroles, pans
- It comes with stylish black coloured tempered heated glass with integrated etched foil elements and stainless steel framed.
- Special design etched foil heating elements to maximize heat transmission on the surface for having the same temperature on the whole surface.
- Ideal for elegant buffet to display warm food, such as pizza, bun, etc. thanks to the extended surface top.CHAR(13)CHAR(10)
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Available drop-in dimensions: 1, 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

Construction

- Electronic control with temperature display.
- AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations
- IPx4 water protection.
- Heating elements connected to the bottom include safety thermostat.


APPROVAL: _____




Electrolux
PROFESSIONAL

Drop-In Drop-in tempered glass top (4 GN container capacity)

Rear side




Side



EI = Electrical inlet (power)

Top

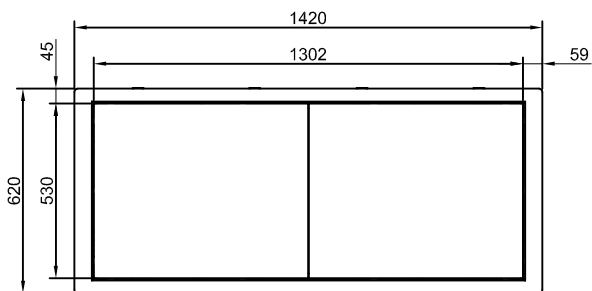

Drop-In
Drop-in tempered glass top (4 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.06



Electrolux
PROFESSIONAL

Drop-In Drop-in tempered glass top (4 GN container capacity)

Electric

Supply voltage:	220-240 V/1N ph/50/60 Hz
Electrical power max.:	1.18 kW

Key Information:

External dimensions, Width:	1420 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	80 mm
Net weight:	25.8 kg
Shipping weight:	53 kg
Shipping height:	410 mm
Shipping width:	660 mm
Shipping depth:	1470 mm
Shipping volume:	0.4 m ³
Set temperature:	+105 / +115 °C

Sustainability






Noise level:	0 dBA
--------------	-------





Drop-In
Drop-in tempered glass top (4 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.06

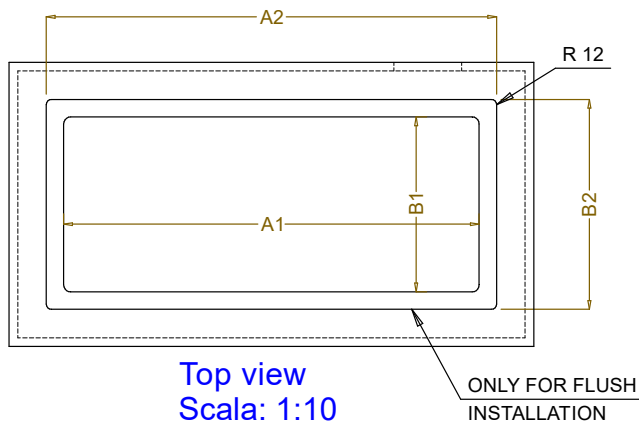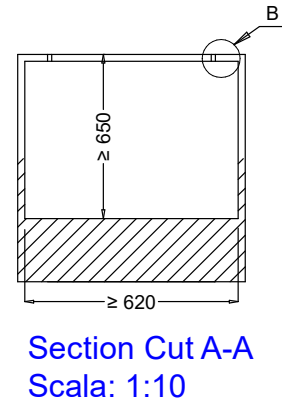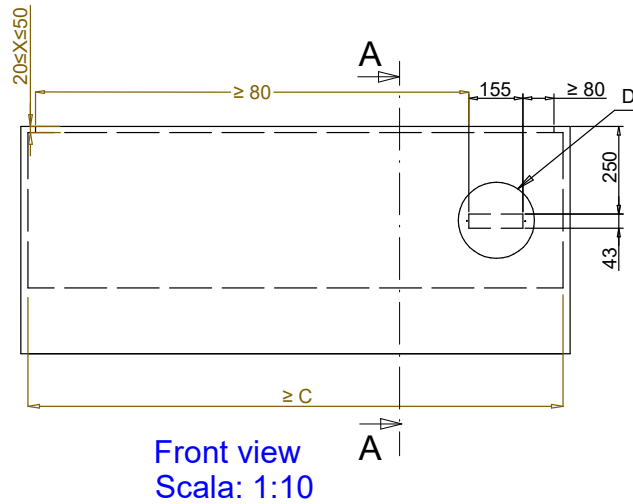

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C
	A1	B1	A2	B2	
1GN	355	560	454	624	535
2GN	680		774		855
3GN	1010		1104		1190
4GN	1330		1424		1510
5GN	1660		1744		1835
6GN	1985		2074		2165

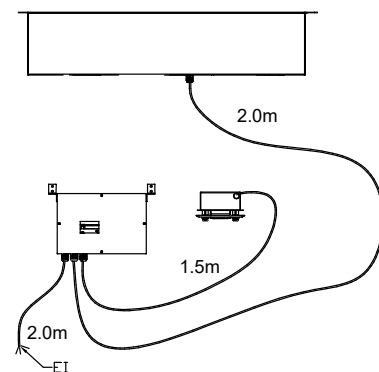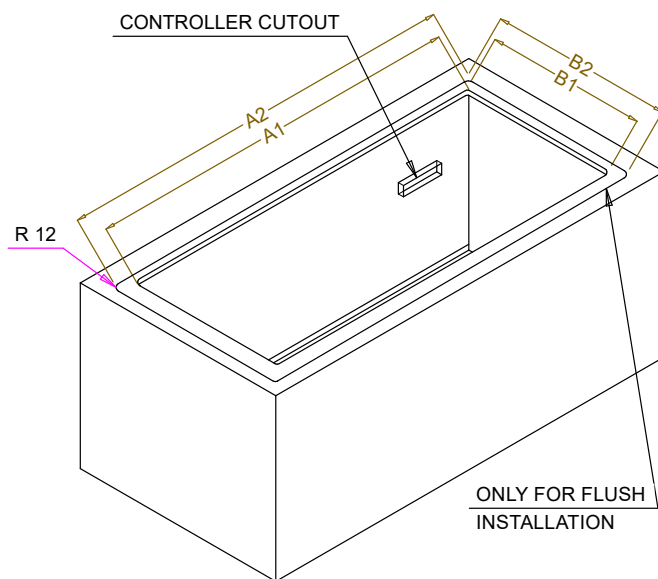

595T01T00 - HOT TEMPERED GLASS