

## Drop-In Drop-in refrigerated well, ventilated (4 GN container capacity)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



341048 (D12C4)

\* NOT TRANSLATED \*

### Main Features

- Bottom part of well is removable for an easier access to the evaporator.
- Suitable for GN 1/1 containers with a maximum height of 150 mm.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Remote version is available.
- Designed to serve: food in GN containers or food on plates/packages or bottles and cans thanks to adjustable bottom well.
- Available drop-in dimensions: 2, 3, 4, 5 GN.
- Well equipped with adjustable bottom that can be set to 5 positions for each GN 1/1 section, independently one from the other to display different items with different heights.
- The temperature uniformity is guaranteed by powerful fans and high surface evaporator.
- Front grids and well bottom panels can be removed without the need of any tool for fast and effective cleaning.
- Well can be cleaned with a hose (after removing easily the fans).
- CB and CE certified by a third party notified body.

### Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.


### Sustainability




- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.

APPROVAL: \_\_\_\_\_

Rear side

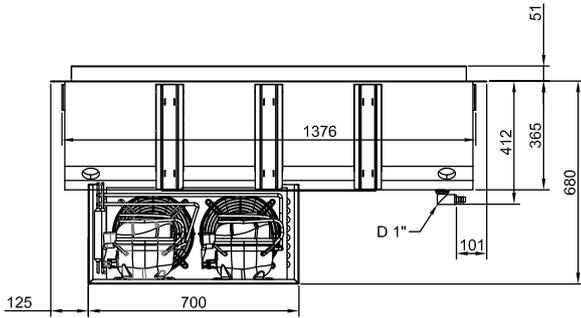


Side

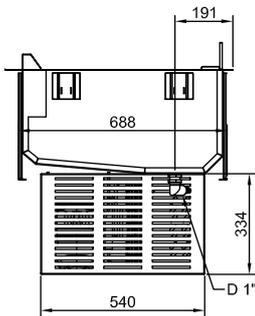

D = Drain  
EI = Electrical inlet (power)

Top

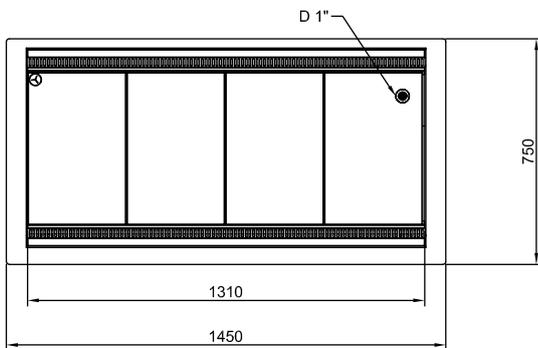

**Drop-In  
Drop-in refrigerated well, ventilated (4 GN container capacity)**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



### Electric

Supply voltage: 220-240 V/1N ph/50 Hz  
Electrical power max.: 1.12 kW

### Water:

Water drain outlet size: 1"

### Key Information:

External dimensions,  
Width: 1450 mm  
External dimensions,  
Depth: 750 mm  
External dimensions,  
Height: 710 mm  
Net weight: 82.9 kg  
Shipping weight: 149 kg  
Shipping height: 1020 mm  
Shipping width: 1200 mm  
Shipping depth: 1490 mm  
Shipping volume: 1.82 m<sup>3</sup>  
Set temperature: +4 / +8 °C



### Refrigeration Data

Refrigerant type: R290



### Sustainability

Noise level: 61 dBA



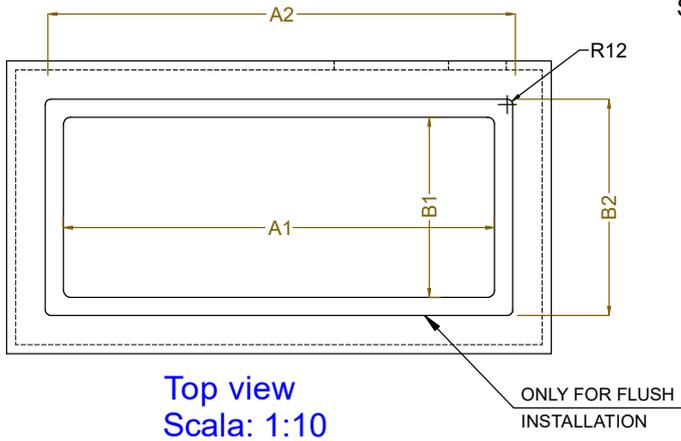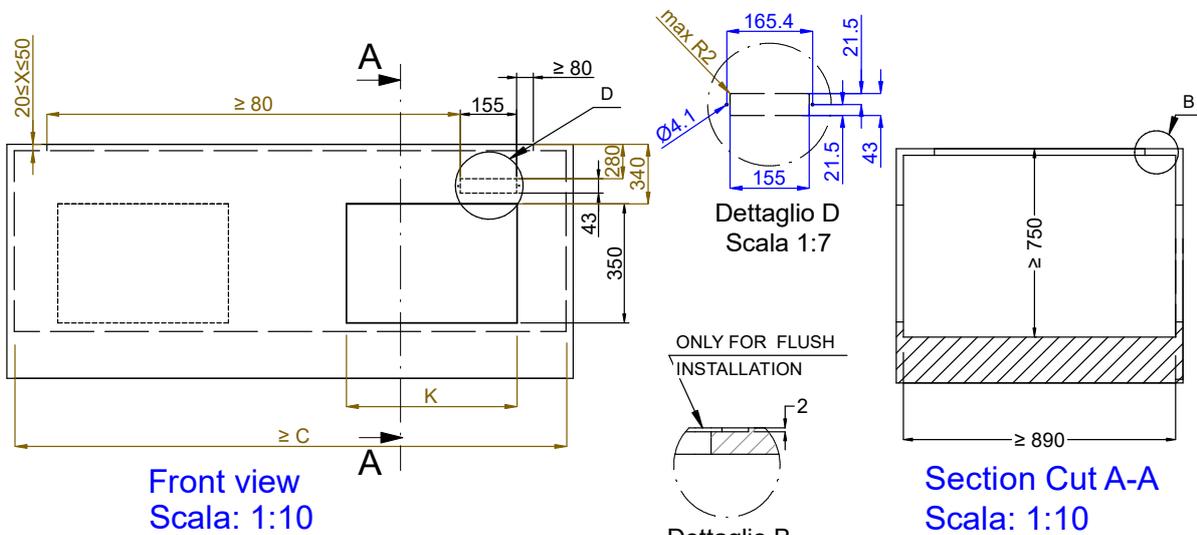

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C	K
	A1	B1	A2	B2		
2GN	740	710	804	754	920	470
3GN	1060		1124		1250	
4GN	1390		1454		1580	
5GN	1710		1774		1900	

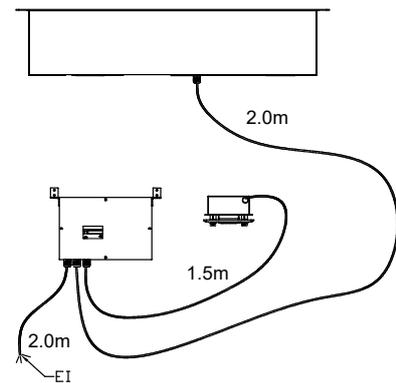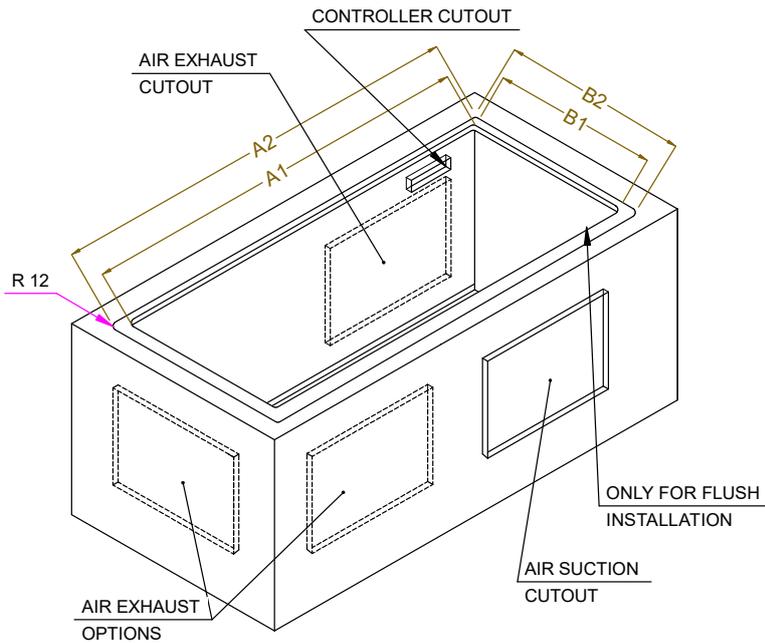

**595T01W00 - COLD VENT. WELL**