

LiberoPro LiberoPro Point for 2 IPH Units - UK Plugs

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



351078 (E2VVADBQZU)

* NOT TRANSLATED *

Main Features

- Can be combined with up to two tabletop appliances LiberoPro IPHASE (Plug Type UK): flat induction hobs, induction wok, induction griddle.
- Compact, lightweight and easy to move.
- Plate holder shelf coupled with tempered glass and lighting for a better visibility from guest side.
- Designed for LiberoPro Duo function for automatic regulation of fan speed according to cooking intensity. Can be activated exclusively with LiberoPro stand alone units.
- LiberoPro Fresh is a low noise air filtration system to absorb efficiently grease particles and bad odours in the working area. It is a 2-stage filtering system with stainless steel fat filters and ceramic activated carbon ones.
- 30 lt neutral drawer - accepting N° 1 GN1/1 - is available as optional accessory.
- Through the user interface with soft touch buttons the operator can:-vary the 4 fan speed;-switch on the LED lighting system of the cooking area;-display indications on maintenance operations (e.g. on filters) or any anomalous operating conditions.

Construction

- Heavy duty AISI 304 Stainless steel construction.
- Mounted on 4 swivelling wheels with brakes on the 2 front wheels (on the operator side).
- Frontal panel in AISI 304 can be customized requiring a special execution.
- Grease and odours filters are easily accessible and removable from operator's side for efficient maintenance without any tool.
- Side support frames each holding n.2 GN 1/9 containers and n.1 tools holder. All included in the standard delivery and easily removable for better cleanability.
- Plug type: IEC/EN 60309-1/2 - 32 amps.
- IPX4 water resistance certification.

APPROVAL: _____



Included Accessories

- | | |
|---------------------------|------------|
| • 2 of - NOT TRANSLATED - | PNC 650190 |
| • 2 of - NOT TRANSLATED - | PNC 650191 |
| • 1 of - NOT TRANSLATED - | PNC 650192 |
| • 1 of - NOT TRANSLATED - | PNC 650193 |

Optional Accessories


- | | | |
|---------------------------------------|------------|--------------------------|
| • Tilting side shelf for Libero Point | PNC 650005 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650189 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650190 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650191 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650192 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650193 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650194 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650195 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 651003 | <input type="checkbox"/> |




Electrolux
PROFESSIONAL

LiberoPro Point for 2 1PH Units - UK Plugs

Front

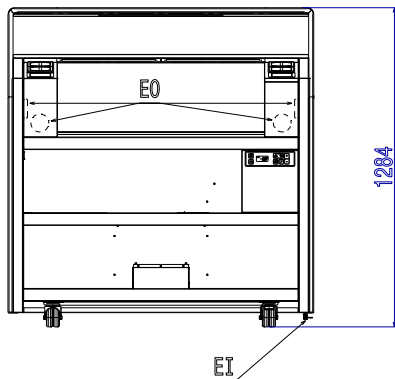


Side

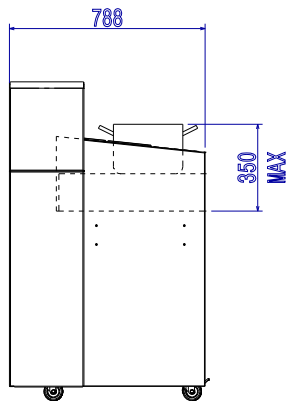

EI = Electrical inlet (power)
EO = Electrical Outlet

Top

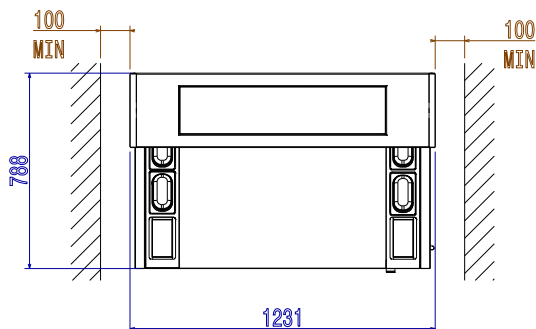

Electric

Supply voltage:	380-415 V/3N ph/50/60 Hz
Electrical power max.:	12.5 kW
Plug type:	IEC/EN 60309-1/2

Key Information:

Frontal power sockets available for Plug-in Units:	4 x 1 Phase Plugs (Plug Type 13A-UK)
External dimensions, Width:	1231 mm
External dimensions, Depth:	788 mm
External dimensions, Height:	1284 mm
Net weight:	155 kg

Air Emission:

Air Flow Rate	
351078 (E2VVADBQZU)	710 m ³ / hour



LiberoPro
LiberoPro Point for 2 1PH Units - UK Plugs

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.04.19