

## LiberoPro

### LiberoPro Point for 3 IPH Units, 2 refrigerated drawers - UK Plugs

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



351091 (E2VVCDBRZU)

\* NOT TRANSLATED \*

### Main Features

- Can be combined with up to three tabletop appliances LiberoPro 1PHASE (Plug Type UK): flat induction hobs, induction wok, induction griddle.
- Compact, lightweight and easy to move.
- Plate holder shelf coupled with tempered glass and lighting for a better visibility from guest side.
- Designed for LiberoPro Duo function for automatic regulation of fan speed according to cooking intensity. Can be activated exclusively with LiberoPro stand alone units.
- LiberoPro Fresh is a low noise air filtration system to absorb efficiently grease particles and bad odours in the working area. It is a 2-stage filtering system with stainless steel fat filters and ceramic activated carbon ones.
- Two integrated stainless steel refrigerated drawers with independent temperature regulation between 0°C and +10°C. No drain required.
- 37 lt refrigerated drawer capacity accepting N° 1 GN1/1 + N° 1 GN 2/4 trays.
- 30 lt neutral drawer - accepting N° 1 GN1/1 - is available as optional accessory.
- Through the user interface with soft touch buttons the operator can:-vary the 4 fan speed;-switch on the LED lighting system of the cooking area;-independently set the temperature of the refrigerated drawers;-display indications on maintenance operations (e.g. on filters) or any anomalous operating conditions.

### Construction

- Heavy duty AISI 304 Stainless steel construction.
- Mounted on 4 swivelling wheels with brakes on the 2 front wheels (on the operator side).
- Frontal panel in AISI 304 can be customized requiring a special execution.
- Grease and odours filters are easily accessible and removable from operator's side for efficient maintenance without any tool.
- Side support frames each holding n.2 GN 1/9 containers and n.1 tools holder. All included in the standard delivery and easily removable for better cleanability.
- Plug type: IEC/EN 60309-1/2 - 32 amps.
- IPX4 water resistance certification.

### Included Accessories

- |                           |            |
|---------------------------|------------|
| • 3 of - NOT TRANSLATED - | PNC 650190 |
| • 3 of - NOT TRANSLATED - | PNC 650191 |
| • 1 of - NOT TRANSLATED - | PNC 650192 |
| • 1 of - NOT TRANSLATED - | PNC 650193 |

### Optional Accessories

- |                                       |            |                          |
|---------------------------------------|------------|--------------------------|
| • Tilting side shelf for Libero Point | PNC 650005 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                  | PNC 650189 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                  | PNC 650190 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                  | PNC 650191 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                  | PNC 650192 | <input type="checkbox"/> |

APPROVAL: \_\_\_\_\_



**Electrolux**  
PROFESSIONAL

**LiberoPro**  
**LiberoPro Point for 3 1PH Units, 2**  
**refrigerated drawers - UK Plugs**

- |                      |            |                          |
|----------------------|------------|--------------------------|
| • - NOT TRANSLATED - | PNC 650193 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650194 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 650195 | <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 651004 | <input type="checkbox"/> |

**LiberoPro**  
**LiberoPro Point for 3 1PH Units, 2 refrigerated drawers - UK Plugs**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2025.04.19




**Electrolux**  
PROFESSIONAL

## LiberoPro LiberoPro Point for 3 1PH Units, 2 refrigerated drawers - UK Plugs

Front

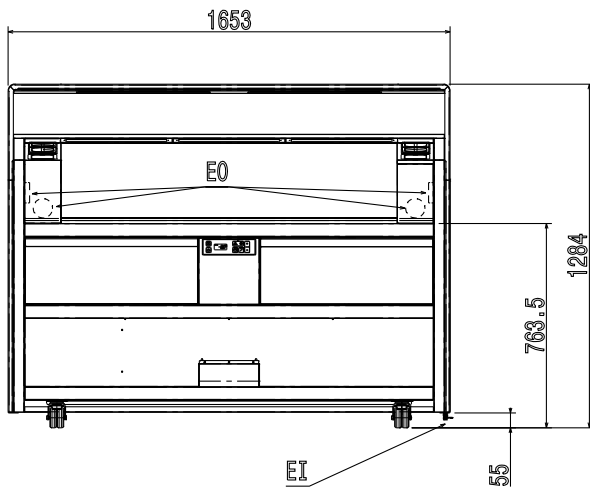


Side

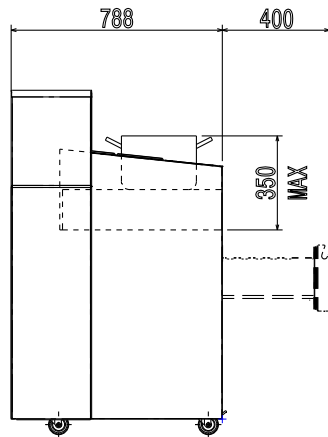

EI = Electrical inlet (power)  
EO = Electrical Outlet

Top

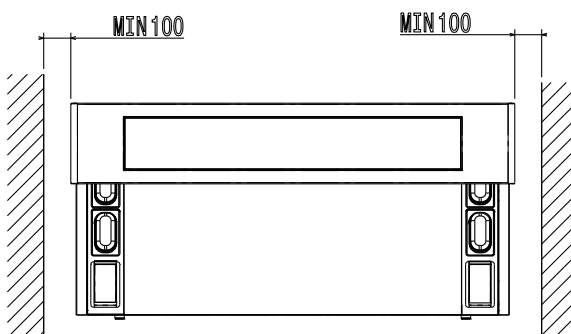

### Electric

Supply voltage:	380-415/380-400 V/3N
Electrical power max.:	ph/50/60 Hz
Plug type:	12.5 kW
	IEC/EN 60309-1/2

### Key Information:

Frontal power sockets available for Plug-in Units:	4 x 1 Phase Plugs (Plug Type 13A-UK)
External dimensions, Width:	1653 mm
External dimensions, Depth:	788 mm
External dimensions, Height:	1284 mm
Net weight:	280 kg

### Sustainability

Refrigerant type:	R600a
-------------------	-------



LiberoPro  
LiberoPro Point for 3 1PH Units, 2 refrigerated drawers - UK Plugs

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.04.19