



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP One Well Electric Fryer 23 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



391384 (E9KKGOBAMCA) \* NOT TRANSLATED \*

391337 (E9KKGDBAMCA) \* NOT TRANSLATED \*

### Main Features

- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Deep drawn V-Shaped well.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.

### Construction

- Unit delivered with four 50 mm legs in stainless steel as standard.
- Interior of well with rounded corners for ease of cleaning.
- Unit is 930 mm deep to give a larger working surface area.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.

### Sustainability

- [NOT TRANSLATED]



APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


### Included Accessories

- 1 of Door for open base cupboard PNC 206350
- 1 of 2 half size baskets for 18/23lt well fryers PNC 927223


### Optional Accessories

- - NOT TRANSLATED - PNC 200086 ☐
- - NOT TRANSLATED - (only for 391384) PNC 200171 ☐
- Junction sealing kit PNC 206086 ☐
- 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels. (only for 391337) PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400mm (only for 391384) PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800mm (only for 391384) PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm (only for 391384) PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm (only for 391384) PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm (only for 391384) PNC 206152 ☐
- Pair of side kicking strips (not for refr-freezer base) PNC 206180 ☐
- 2 panels for service duct for single installation (only for 391384) PNC 206181 ☐
- Hygienic lid for 23lt fryers PNC 206201 ☐
- 2 panels for service duct for back to back installation (only for 391384) PNC 206202 ☐
- Frontal kicking strip for 23lt fryers in two parts PNC 206203 ☐
- Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers PNC 206209 ☐
- 4 feet for concrete installation (only for 391384) PNC 206210 ☐
- Chimney upstand, 400mm PNC 206303 ☐
- BACK HANDRAIL 800 MM - MARINE (only for 391384) PNC 206308 ☐
- BACK HANDRAIL 1200 MM - MARINE (only for 391384) PNC 206309 ☐
- Door for open base cupboard PNC 206350 ☐
- Base support for wheels (lateral) for 23lt fryers and pastacookers (900) PNC 206372 ☐
- Rear paneling - 600mm (700/900XP) (only for 391384) PNC 206373 ☐
- Rear paneling - 800mm (700/900) (only for 391384) PNC 206374 ☐
- Rear paneling - 1000mm (700/900) (only for 391384) PNC 206375 ☐
- Rear paneling - 1200mm (700/900) (only for 391384) PNC 206376 ☐
- Chimney grid net, 400mm PNC 206400 ☐
- 2 side covering panels for free standing appliances PNC 216134 ☐
- - NOT TRANSLATED - PNC 921023 ☐
- 2 half size baskets for 18/23lt well fryers PNC 927223 ☐
- 1 full size basket for 18/23lt well fryers PNC 927226 ☐
- Unclogging rod for HD fryers drainage pipe PNC 927227 ☐
- Oil life saver for 23lt fryers PNC 960645 ☐

Front

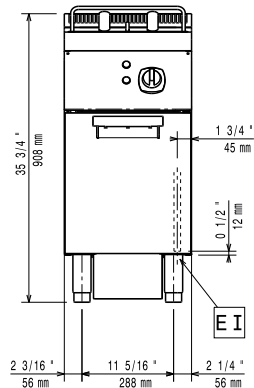


Side

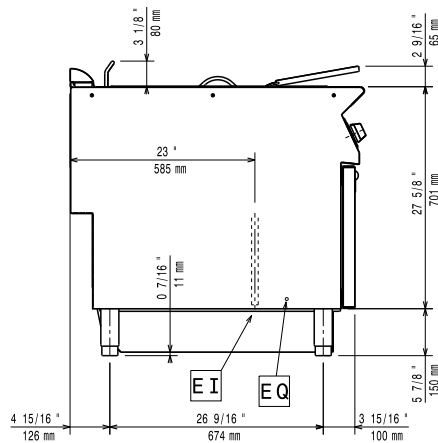

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

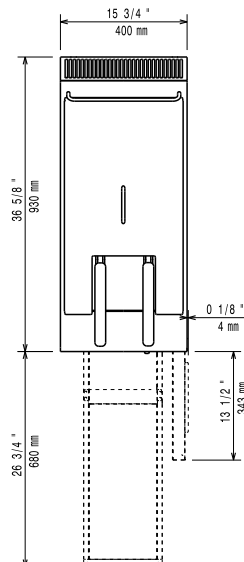

### Electric

#### Supply voltage:

**391384 (E9KKGOBAMCA)** 415-430 V/3N ph/50-60 Hz  
 380-400 V/3N ph/50-60 Hz

**391337 (E9KKGDBAMCA)**

#### Total Watts:

**391384 (E9KKGOBAMCA)** 17.2 kW  
**391337 (E9KKGDBAMCA)** 18 kW

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

#### Usable well dimensions

(width): 340 mm

#### Usable well dimensions

(height): 575 mm

#### Usable well dimensions

(depth): 400 mm

#### Well capacity:

21 lt MIN; 23 lt MAX

#### Performance\*:

**391384 (E9KKGOBAMCA)** 35.4 kg/hr

**391337 (E9KKGDBAMCA)** 37.5 kg/hr

#### Thermostat Range:

105 °C MIN; 185 °C MAX

#### Net weight:

57 kg

#### Shipping weight:

**391384 (E9KKGOBAMCA)** 73 kg

**391337 (E9KKGDBAMCA)** 74 kg

#### Shipping height:

1080 mm

#### Shipping width:

460 mm

#### Shipping depth:

1020 mm

#### Shipping volume:

0.51 m<sup>3</sup>

#### \*Based on:

ASTM F1361-Deep fat fryers

#### Certification group:

EFE91M23