



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP Two Wells Electric Fryer 23 liter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391385 (E9KKGOBAMEA)

* NOT TRANSLATED *

391338 (E9KKGDBAMEA)

* NOT TRANSLATED *

Main Features

- Deep drawn V-Shaped wells.
- Interior of wells with seamlessly laser-welded corners for ease of cleaning.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- Supplied as standard with 4 half size baskets and 1 right and left side doors for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit delivered with four 50 mm legs in stainless steel as standard.
- IPX5 water resistance certification.

Sustainability

- [NOT TRANSLATED]



APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


Included Accessories

- 2 of Door for open base cupboard PNC 206350
- 2 of 2 half size baskets for 18/23lt well fryers PNC 927223


Optional Accessories

- - NOT TRANSLATED - PNC 200086 ☐
- - NOT TRANSLATED - (only for 391385) PNC 200171 ☐
- Junction sealing kit PNC 206086 ☐
- 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels. PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm (only for 391385) PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm (only for 391385) PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm (only for 391385) PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm (only for 391385) PNC 206152 ☐
- Pair of side kicking strips (not for refr-freezer base) PNC 206180 ☐
- 2 panels for service duct for single installation (only for 391385) PNC 206181 ☐
- Hygienic lid for 23lt fryers PNC 206201 ☐
- 2 panels for service duct for back to back installation (only for 391385) PNC 206202 ☐
- Frontal kicking strip for 23lt fryers in two parts PNC 206203 ☐
- Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers PNC 206209 ☐
- 4 feet for concrete installation (only for 391385) PNC 206210 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- BACK HANDRAIL 800 MM - MARINE (only for 391385) PNC 206308 ☐
- BACK HANDRAIL 1200 MM - MARINE (only for 391385) PNC 206309 ☐
- Door for open base cupboard PNC 206350 ☐
- Base support for wheels (lateral) for 23lt fryers and pastacookers (900) PNC 206372 ☐
- Rear paneling - 800mm (700/900) (only for 391385) PNC 206374 ☐
- Rear paneling - 1000mm (700/900) (only for 391385) PNC 206375 ☐
- Rear paneling - 1200mm (700/900) (only for 391385) PNC 206376 ☐
- Chimney grid net, 400mm PNC 206400 ☐
- 2 side covering panels for free standing appliances PNC 216134 ☐
- - NOT TRANSLATED - PNC 921023 ☐
- 2 half size baskets for 18/23lt well fryers PNC 927223 ☐
- 1 full size basket for 18/23lt well fryers PNC 927226 ☐
- Unclogging rod for HD fryers drainage pipe PNC 927227 ☐
- Oil life saver for 23lt fryers PNC 960645 ☐

Front

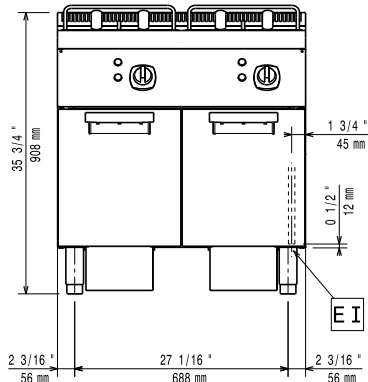


Side

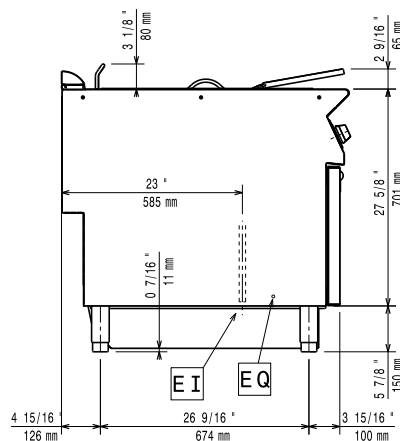

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

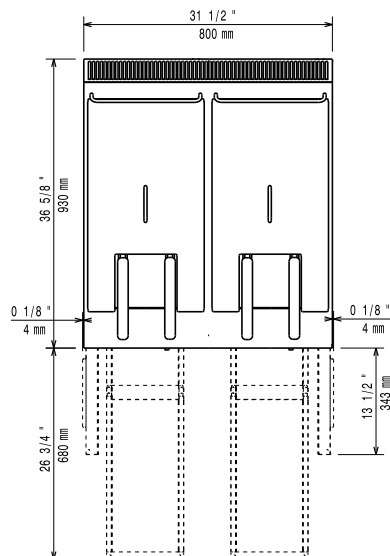

Electric

Supply voltage:

391385 (E9KKGOBAMEA) 415-430 V/3N ph/50-60 Hz
 380-400 V/3N ph/50-60 Hz

391338 (E9KKGDBAMEA)

Total Watts:

391385 (E9KKGOBAMEA) 34.4 kW
 391338 (E9KKGDBAMEA) 36 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width): 340 mm

Usable well dimensions

(height): 575 mm

Usable well dimensions

(depth): 400 mm

Well capacity:

21 lt MIN; 23 lt MAX

Performance*:

391385 (E9KKGOBAMEA) 70.8 kg\hr

391338 (E9KKGDBAMEA) 75 kg\hr

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

115 kg

Shipping weight:

391385 (E9KKGOBAMEA) 120 kg

391338 (E9KKGDBAMEA) 125 kg

Shipping height:

1080 mm

Shipping width:

1020 mm

Shipping depth:

391385 (E9KKGOBAMEA) 860 mm

391338 (E9KKGDBAMEA) 880 mm

Shipping volume:

391385 (E9KKGOBAMEA) 0.95 m³

391338 (E9KKGDBAMEA) 0.97 m³

*Based on:

ASTM F1361-Deep fat fryers

Certification group:

EFE92M23