

Warewashing
hygiene&clean Small Pot & Pan
Washer, DIN 10512 and A0 60 compliant

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



506058
(EPPWA060)

* NOT TRANSLATED *

Main Features

- Performance is certified for disinfection level according to DIN 10512 standard (1st and 2nd cycle) and complies with A0 60 level according to EN 15883-1 standard (3rd cycle as Disinfection cycle).
- Built-in atmospheric boiler sized to raise incoming 50 °C water to 90 °C minimum for sanitizing rinse. No external booster is required. Constant temperature of 90 °C throughout the rinsing cycle regardless of the network's water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back contaminating the network is compliant with EN 61770 standard, WRAS, Belgaqua back-flow prevention requirements.
- 180/ 360 second cycles is certified according to DIN 10512 standard. While 480 second cycle complies with A0 60 level according to EN 15883-1 standard which includes final pause to improve the drying result to avoid water residuals on the washed wares.
- 4 washing programs (one program is continual).
- Equipped with 3-sided wash arm in addition to upper and lower revolving arms provides more powerful wash water from all angles for the best cleaning of soiled items.
- Door fold down 180° to easy access to the washing chamber and facilitate daily cleaning.
- Unique temperature interlock guarantees required temperatures in both the wash and final rinse.
- Double skinned insulated wall ensures a low noise level and a reduction in heat loss from the machine.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Automatic self-cleaning cycle to avoid bacteria proliferation.
- State-of-the-art electronic controls with built-in programming, self-diagnostics for serviceability and automatic interior self-cleaning cycle.
- Digital read-out keeps operator informed as to temperatures.
- Fault auto-diagnosis system.
- Low noise level.

Construction

- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.

APPROVAL: _____

- External connecting board protected by a waterproof plastic box.
- Unit to feature smooth surfaces to facilitate cleaning.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to include drain pump, detergent and rinse aid dispenser pumps.

Sustainability



- Pre-arranged to be connected to Energy Management device.

Included Accessories

- | | |
|--|------------|
| • 1 of EXTRA RACK FOR CONTAINERS AND TRAYS | PNC 864182 |
| • 1 of S/S BASKET FOR POT WASHER, 688 MM | PNC 864191 |
| • 1 of Basket for 12 soup bowls - green | PNC 867000 |

Optional Accessories


- | | | |
|---|------------|--------------------------|
| • FILTER FOR TOTAL DEMINERALIZATION | PNC 864015 | <input type="checkbox"/> |
| • Filter for partial demineralization | PNC 864017 | <input type="checkbox"/> |
| • Kit to measure total and partial water hardness | PNC 864050 | <input type="checkbox"/> |
| • EXTRA RACK FOR CONTAINERS AND TRAYS | PNC 864182 | <input type="checkbox"/> |
| • S/S BASKET FOR POT WASHER, 688 MM | PNC 864191 | <input type="checkbox"/> |
| • Filter for total demineralization | PNC 864367 | <input type="checkbox"/> |
| • KIT FOR 9 TRAYS IN POTWASHER | PNC 864471 | <input type="checkbox"/> |




Electrolux
PROFESSIONAL

Warewashing hygiene&clean Small Pot & Pan Washer, DIN 10512 and A0 60 compliant

Front

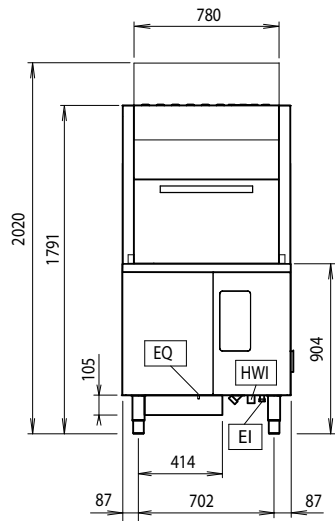


Side

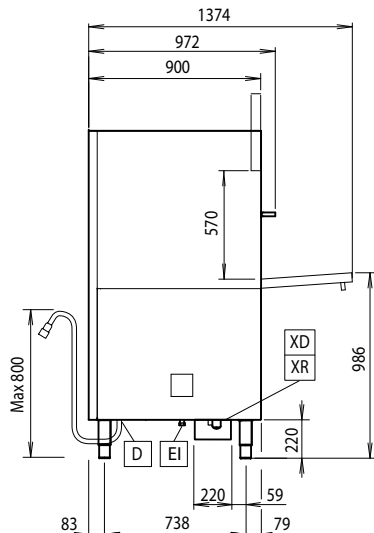

- | | |
|--------------------------------------|---------------------------|
| CWII = Cold Water inlet 1 (cleaning) | XD = Detergent connection |
| D = Drain | XR = Rinse aid connection |
| EI = Electrical inlet (power) | |
| EO = Electrical Outlet | |
| HWI = Hot water inlet | |
| WI = Water inlet | |

Top

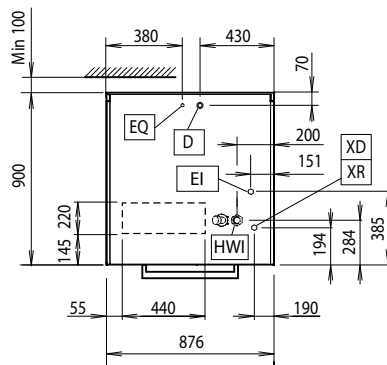

Electric

| | |
|--------------------------|-------------------|
| Supply voltage: | 400 V/3N ph/50 Hz |
| Convertible to: | 230V 3~ |
| Default Installed Power: | 13 kW |
| Boiler heating elements: | |
| Tank heating elements: | 7 kW |
| Wash pump power: | 2.5 kW |

Water:

| | |
|-----------------------------|-----------|
| Pressure, bar min/max: | 0.5-7 bar |
| Water supply temperature*: | 50 °C |
| Washing tank capacity (lt): | 95 |
| Boiler Capacity (lt): | 18 |

Key Information:

| | |
|--|----------------------|
| Rinsing water consumption (per cycle): | 7 lt |
| Duration cycle*: | 180/360/480/inf sec. |
| Washing cycle temperature: | 77 °C |
| Hot rinse cycle temperature: | 90 °C |
| Baskets per hour (fast*/glasses*/multipurpose& cups/intensive*/MyEco): | 20 / 0 / / / |
| Cell dimensions - width: | 670 mm |
| Cell dimensions - depth: | 710 mm |
| Cell dimensions - height: | 570 mm |
| External dimensions, Width: | 876 mm |
| External dimensions, Depth: | 900 mm |
| External dimensions, Height: | 1791 mm |
| Net weight: | 200 kg |
| Shipping weight: | 246 kg |
| Shipping height: | 2030 mm |
| Shipping width: | 1010 mm |
| Shipping depth: | 1020 mm |
| Shipping volume: | 2.09 m ³ |
| N° of working cycles: | 4 |



Warewashing
hygiene&clean Small Pot & Pan Washer, DIN 10512 and A0 60 compliant

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.08