

## LiberoPro

### Flat Induction 1 Phase, mono zone, drop in - UK Plug


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

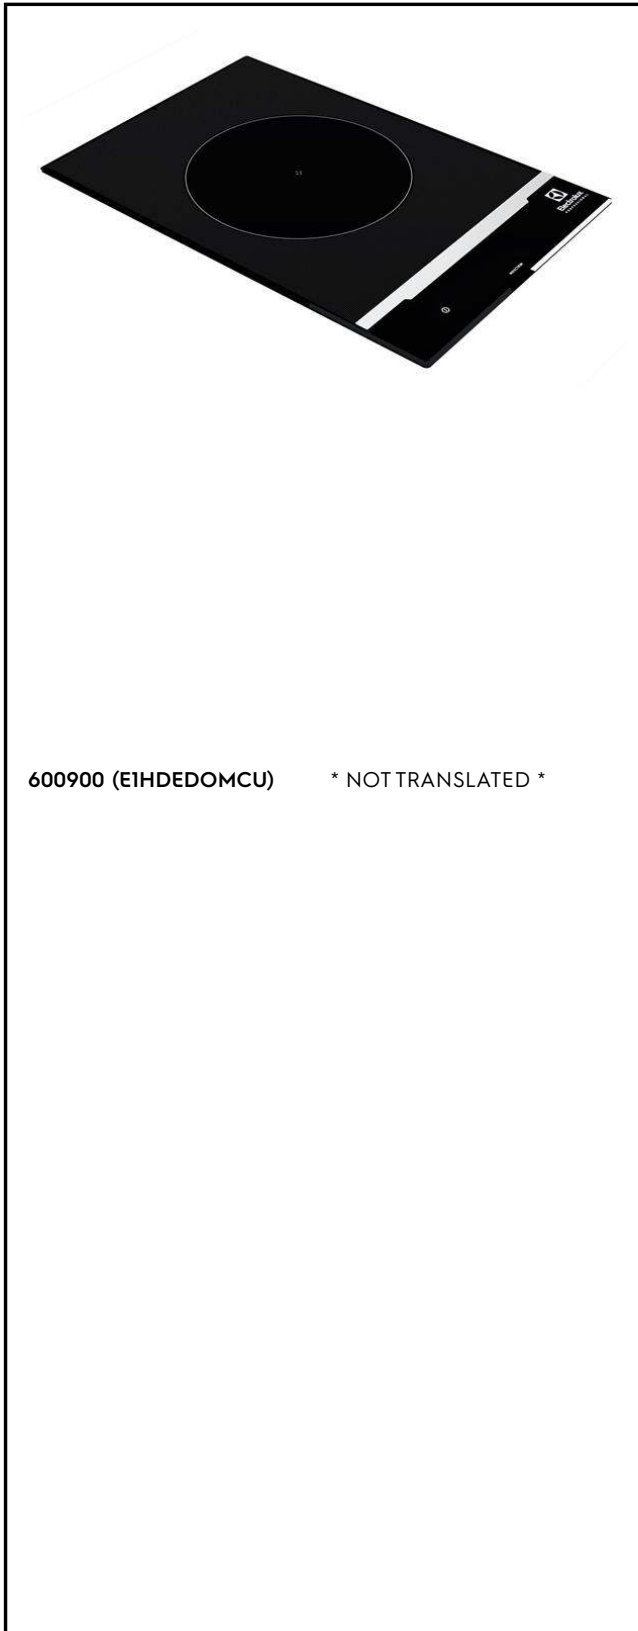

600900 (EIHDEDOMCU)

\* NOT TRANSLATED \*

### Main Features

- Plug in unit designed for drop in installations.
- 2-color user interface (white and red) for better readability.
- Automatic pan detection to transfer power only when pan is present.
- Glass touch display on top for maximum visibility.
- Power level settings from 1 to 10.
- Timer function can be used to set the cooking time, switching off the zone automatically at the end of the time set.
- Suitable for pot and pan with diameter from 120 mm to 340mm.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.

### Construction

- Heavy duty AISI 304 Stainless steel construction.
- Cord and plug included.
- IPX4 water resistance certification.
- Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness.

### Sustainability




- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.
- [NOT TRANSLATED]

### Optional Accessories

- - NOT TRANSLATED - PNC 650146 ☐
- - NOT TRANSLATED - PNC 650147 ☐
- Stainless steel universal frying pan with stainless steel handle (diam. 200mm) suitable for induction and all other heating sources PNC 653596 ☐
- Universal frying pan with stainless steel handle (diam. 240mm) suitable for induction and all other heating sources PNC 653597 ☐
- Universal frying pan with stainless steel handle (diam. 280mm) suitable for induction and all other heating sources PNC 653598 ☐
- Universal frying pan with ribbed plate suitable for induction cookers PNC 653618 ☐


APPROVAL: \_\_\_\_\_

Top



ELECTROLUX VERSION

Side

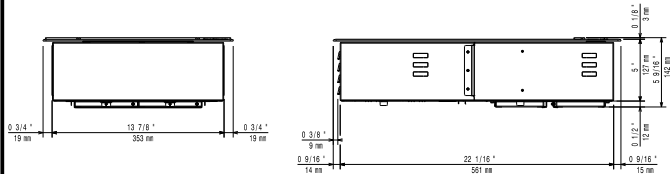

EI = Electrical inlet (power)  
 EO = Electrical Outlet

Other

