

LiberoPro Flat Induction 1 Phase, double zone, drop in - UK Plug


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

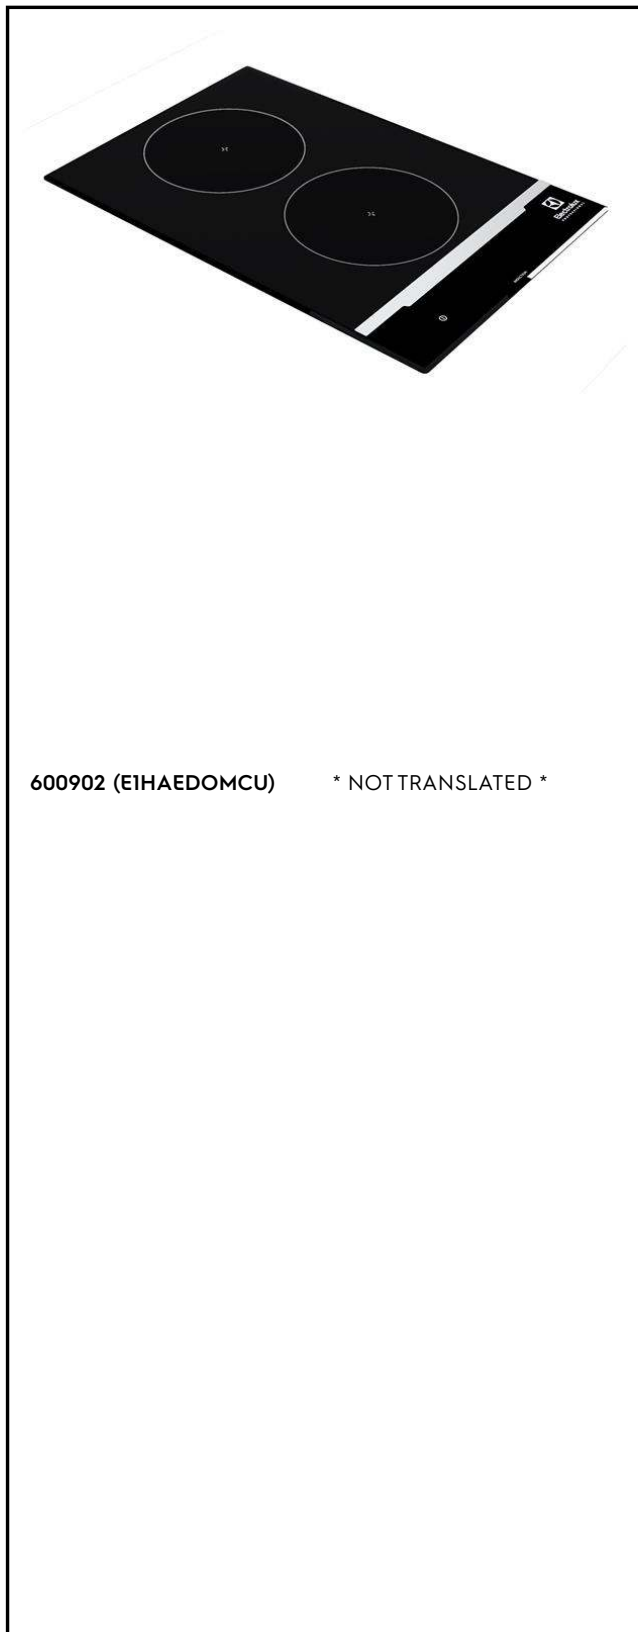

600902 (E1HAEDOMCU)

* NOT TRANSLATED *

Main Features

- Plug in unit designed for drop in installations.
- 2-color user interface (white and red) for better readability.
- Automatic pan detection to transfer power only when pan is present.
- Glass touch display on top for maximum visibility.
- Power level settings from 1 to 10.
- Timer function can be used to set the cooking time, switching off the zone automatically at the end of the time set.
- 2 independently controlled cooking zone.
- BRIDGE FUNCTION allows to combine the two separate cooking zones to create a single large surface suitable for rectangular pan of max dimensions of 350x450mm.
- Suitable for pots and pans with diameter from 120 mm to 240 mm for each cooking zone.
- Maximum usable power: 3.5 kW. The user interface shows the power level selectable on each cooking zone according to the power used.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.

Construction

- Heavy duty AISI 304 Stainless steel construction.
- Cord and plug included.
- IPX4 water resistance certification.
- Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness.

Sustainability




- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.
- [NOT TRANSLATED]

Optional Accessories


- - NOT TRANSLATED - PNC 650146 ☐
- - NOT TRANSLATED - PNC 650147 ☐
- Stainless steel universal frying pan with stainless steel handle (diam. 200mm) suitable for induction and all other heating sources PNC 653596 ☐
- Universal frying pan with stainless steel handle (diam. 240mm) suitable for induction and all other heating sources PNC 653597 ☐
- Universal frying pan with ribbed plate suitable for induction cookers PNC 653618 ☐

APPROVAL: _____

Top

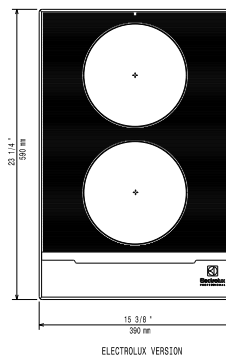


Side

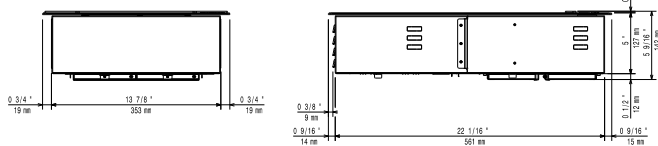

EI = Electrical inlet (power)
 EO = Electrical Outlet

Other

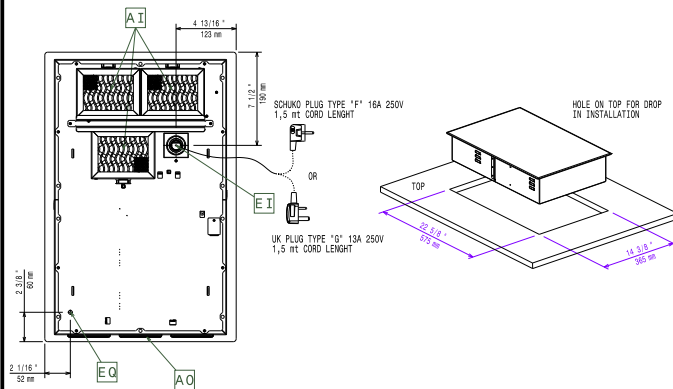

Electric

Supply voltage:	220-240 V/1N ph/50-60 Hz
Front Plate Watts:	3 kW
Back Plate Watts:	3 kW
Plug type:	UK-13A
Minimum Circuit Ampacity (MCA):	13A

Key Information:

External dimensions, Width:	392 mm
External dimensions, Depth:	592 mm
External dimensions, Height:	127 mm
Net weight:	14.5 kg