

Vacuum Packers Vacuum packer 20m3/h table top (UK plug)

ITEM #		
MODEL #		
NAME #		
SIS #		
313 #		
AIA #		



602215 (EVP20T)

* NOT TRANSLATED *

Main Features

- Table-top vacuum packer with oil lubricated vacuum pump.
- Vacuum level control through high-precision, absolute-type vacuum sensor, which does not require calibration.
- Pressure chamber made of constant thickness, hydroformed, stainless steel with rounded corners for easy cleaning.
- Sturdy, transparent PMMA (plexiglass) lid with rounded edges; opens automatically at the end of the cycle.
- User friendly interface thanks to a 5" touch screen control panel, made of tempered glass, resistant to liquids, humidity, dirt and dust.
- 5 display languages: EN, FR, IT, DE, ES.
- 10 editable user programs (vacuum, extra vacuum, sealing time, gas percentage).
- 4 preset (Gourmet) cycles for food processing.
- 3 preset cycles (Gasplus) with inert gas injection (for delicate/soft foods).
- 4 vacuum cycles for jars/containers.
- 2 preset cycles for preservation and sous vide cooking.
- 1 programmable deaeration program on eight vacuum phases and eight pause phases (Degas).
- Softair slow air return at the end of the cycle, more gentle on food (avoids deformation).
- Adjustable sealing time 0.1 to 6 seconds.
- Specific pump oil cleaning cycle (H2Out).
- Automatic warnings if food needs cooling down (hot), failure in the packing process, gas missing, oil change.
- Pre-arranged for external vacuum packing in containers by connecting a specific pipe to the air extraction nozzle (available as spare part).
- 3 PE filling plates included.
- Sealing bar 410 mm, easily removable for cleaning.
- Unit pre-arranged to be connected to an inert gas system.

Construction


- Entirely constructed in 304 AISI stainless steel.
- Easy access for service through hinged opening of the body.

APPROVAL:





Vacuum Packers Vacuum packer 20m3/h table top (UK plug)

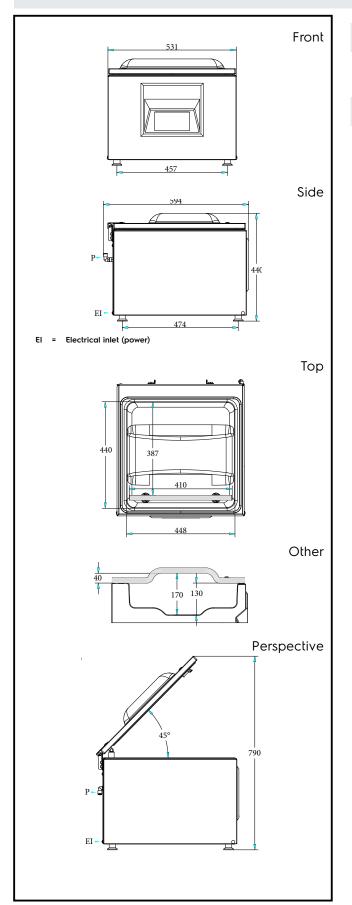

Electric

Supply voltage: 220-240 V/1N ph/50-60 Hz

Total Watts: 0.9 kW
Plug type: UK-13A

Key Information:

Filling board nr: 3 2 Gas nozzles: External dimensions, Width: 531 mm External dimensions, Depth: 594 mm External dimensions, Height: 440 mm Net weight (kg): 62 Well Capacity: 25.2 lt Pump: 20 m³/h Front Sealing bar position: Sealing bar length: 410 mm

Max chamber (chamber + cover) dimensions:

440 x 448 x 170 mm

Chamber working

dimensions: 387 x 448 x 130 mm

