



High Speed Equipment GourmeXpress High Speed Oven, black 380-415V/3N/50Hz

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



603952
(EPRPROBTD)

* NOT TRANSLATED *

Main Features

- Ventless equipment, can be installed without extraction hood. Perfect for front house cooking (see handbook for more details).
- Adjustable temperature control from 30°C to 280°C.
- Adjustable impingment speed from 10% to 100% with 10% increment.
- Adjustable microwave power from 0% to 100% with 10% increment. With 0% microwave it can be used as a convection oven.
- Easy to use 5" capacitive touchscreen user interface where up to 1024 recipes can be stored.
- It is possible to create multiphase recipes with different combinations of temperature, microwave and impingment for each phase.
- For easier recipe management each recipe can be linked to: - a dedicated session (i.e. breakfast, lunch, dinner, etc.)- a customized image- a bar code, to be retrieved with a bar code scanner (available as an optional accessory PNC 653820)
- Countdown display and buzzer with adjustable volume at the end of the cycle (or phase in case of multiphase recipes).
- Prearranged for USB memory stick data transfer.
- [NOT TRANSLATED]
- [NOT TRANSLATED]

Construction

- AISI 304 stainless steel cooking chamber with all rounded corners for easy cleaning.
- Compact footprint with a wide 17-liter cooking chamber.
- Removable easy to clean top and bottom hot air jet plates.
- Catalytic filters, removable and replaceable.
- Easy to access air filter.
- Ergonomic door handle.
- 2" adjustable feet.
- IPX3 protected.
- Shovel shelf rack on top of the oven.

Included Accessories

- 1 of Teflon tray for GourmeXpress High Speed Oven PNC 653816
- 1 of Teflon mesh basket for GourmeXpress High Speed Oven PNC 653817
- 1 of Aluminium shovel for GourmeXpress High Speed Oven PNC 653819

Optional Accessories

- - NOT TRANSLATED - PNC 650243
- - NOT TRANSLATED - PNC 653820

Recommended Detergents


- S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity PNC 0S2882

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

Front




Side




EI = Electrical inlet (power)
EO = Electrical Outlet

Top



Distances

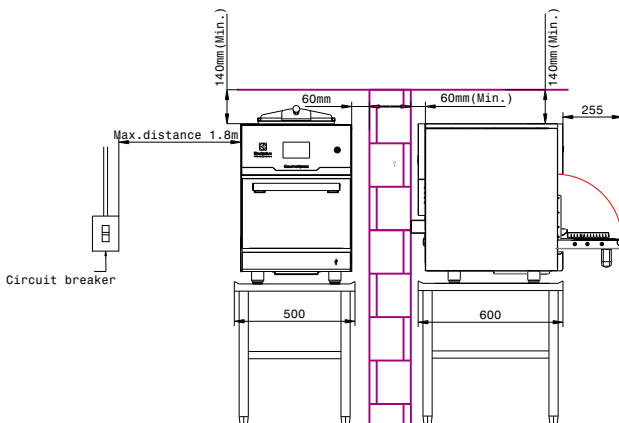

Electric

Supply voltage:	
603952 (EPRPROBTD)	380-415 V/3N ph/50 Hz
Rated amps:	14.5 A
Total Watts:	5.8 kW
Plug type:	Cable without plug

Installation:

Clearance: 60 mm from side, 140 mm from top

Key Information:

Net Volume:	17 lt
	Total Power: 5.8 kW
	Power of Microwave: 2.2kW
	- 2 magnetron
	Power of Convection: 5.5 kW

Power details:

Oven working Temperature: 30 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width): 317 mm

Oven Cavity Dimensions (height): 193 mm

Oven Cavity Dimensions (depth): 294 mm

External dimensions, Width: 460 mm

External dimensions, Depth: 710 mm

External dimensions, Height: 660 mm

Net weight: 86 kg

Shipping weight: 106 kg

Shipping height: 770 mm

Shipping width: 770 mm

Shipping depth: 580 mm

Shipping volume: 0.34 m³

5" Capacitive Touchscreen
Display
1024 Cooking Programs

Controls:

1024 Cooking Programs