Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 15 liter



panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

APPROVAL:

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- Two high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPX 4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

• [NOT TRANSLATED]

Included Accessories

- 1 of Door for open base PNC 206350 cupboard
- 1 of Full size basket for 14 and PNC 921691 15lt free standing fryers

Optional Accessories

- Junction sealing kit PNC 206086 □
 Draught diverter PNC 206126 □
 Matching ring for flue condenser
 Flanged feet kit PNC 206136 □
 Frontal kicking strip for concrete installation, 400mm
- Frontal kicking strip for concrete installation, 800mm



PNC 206148 🗅

Excelence



Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 15 liter

 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150	
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151	
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152	
 Frontal kicking strip, 400mm (not for refr-freezer base) 	PNC 206175	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
• Frontal kicking strip, 1000mm (not	PNC 206177	
 for refr-freezer base) Frontal kicking strip, 1200mm (not for user to see a see) 	PNC 206178	
 for refr-freezer base) Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
4 feet for concrete installation	PNC 206210	
Sediment tray for 15lt fryers	PNC 206235	
	PNC 206249	_
 Pair of side kicking strips 		
 Pair of side kicking strips for concrete installation 	PNC 206265	
Oil drain pipe for 15lt free standing fryer	PNC 206301	
 Chimney upstand, 400mm 	PNC 206303	
Right and left side handrails	PNC 206307	
• BACK HANDRAIL 800 MM - MARINE	PNC 206308	
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	
Door for open base cupboard	PNC 206350	
Base support for feet or wheels - 400mm (700/900XP)	PNC 206366	
Base support for feet or wheels - 800mm (700/900)	PNC 206367	
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
	PNC 206370	
 Rear paneling - 600mm (700/900XP) 	PNC 206373	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
		_
• Rear paneling - 1200mm (700/900)	PNC 206376	
 Chimney grid net, 400mm 	PNC 206400	
• BASE SUPPORT FOR FEET/WHEELS 600M	PNC 206431	
• 2 side covering panels, h=700mm, d=700mm	PNC 216000	
 Full size basket for 14 and 15lt free standing fryers 	PNC 921691	
• 2 half size baskets for 14 and 15lt fryers	PNC 921692	
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	
 Unclogging rod for 15lt drainage pipe 	PNC 921695	

 Deflector for floured products for 	PNC 921696	
15lt fryers		


• Pressure regulator for gas units PNC 927225

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 15 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 15 liter

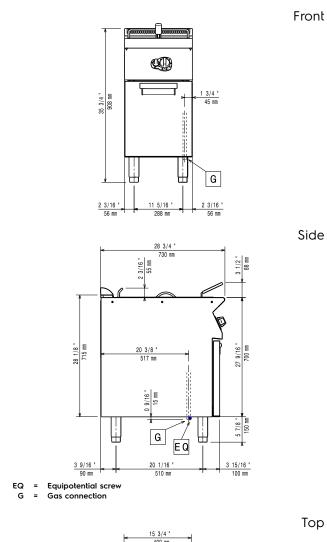


GasGas Power:14 kWStandard gas delivery:Natural Gas G20 (20mbar)Gas Type Option:LPG;Natural GasGas Inlet:1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions 240 mm (width): Usable well dimensions (height): 505 mm Usable well dimensions (depth): 380 mm Well capacity: 13 It MIN; 15 It MAX Thermostat Range: 105 °C MIN; 185 °C MAX Net weight: 55 kg 58 kg Shipping weight: Shipping height: 1140 mm Shipping width: 460 mm Shipping depth: 820 mm Shipping volume: 0.43 m³ Certification group: N7FG



Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 15 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.