

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



371237 (E7GRGDGCFU)

Half module gas grill free standing

## **Short Form Specification**

#### Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 8 kW stainless steel gas burners with flame failure device, protected by deflection trays. Suitable for natural gas or LPG. Cooking surface grids in cast iron, easily removable for cleaning. Cast iron grids can be rotated for the grilling of fish or meats. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

#### **Main Features**

- Stainless steel burners with flame failure device.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Stainless steel high splash guard on the rear and sides can be easily removed for cleaning and is dishwasher-safe.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

#### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX4 water resistance certification.

APPROVAL:





### **Included Accessories**

• 1 of SCRAPER FOR FREESTANDING PNC 206422 GRILLS

### **Optional Accessories**


Optional Accessories		
<ul> <li>Junction sealing kit</li> </ul>	PNC 206086	
Draught diverter	PNC 206126	
<ul> <li>Matching ring for flue condenser</li> </ul>	PNC 206127	
<ul> <li>4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to</li> </ul>	PNC 206135	_
install with base supports for feet/		
wheels.		
	PNC 206136	
Flanged feet kit		_
Frontal kicking strip for concrete     Frontal kicking strip for concrete	PNC 206147	
installation, 400mm		_
Frontal kicking strip for concrete	PNC 206148	
installation, 8ŎOmm		
Frontal kicking strip for concrete	PNC 206150	
installation, 1000mm		
Frontal kicking strip for concrete	PNC 206151	
installation, 1200mm		
<ul> <li>Frontal kicking strip for concrete</li> </ul>	PNC 206152	
installation, 1600mm		
<ul> <li>Frontal kicking strip, 400mm (not for</li> </ul>	PNC 206175	
refr-freezer base)		
<ul> <li>Frontal kicking strip, 800mm (not for</li> </ul>	PNC 206176	
refr-freezer base)		
• Frontal kicking strip, 1000mm (not for	PNC 206177	
refr-freezer base)		
• Frontal kicking strip, 1200mm (not for	PNC 206178	
refr-freezer base)		
• Frontal kicking strip, 1600mm (not for	PNC 206179	
refr-freezer base)		
<ul> <li>4 feet for concrete installation</li> </ul>	PNC 206210	
<ul> <li>Pair of side kicking strips</li> </ul>	PNC 206249	
<ul> <li>Pair of side kicking strips for</li> </ul>	PNC 206265	
concrete installation	FINC 200203	_
	PNC 206303	
Chimney upstand, 400mm		
<ul> <li>Right and left side handrails</li> </ul>	PNC 206307	
BACK HANDRAIL 800 MM -	PNC 206308	
MARINE		
<ul> <li>Flue condenser for 1/2 module, 120</li> </ul>	PNC 206310	
mm diameter		
<ul> <li>Base support for feet or wheels -</li> </ul>	PNC 206366	
400mm (700/900XP)		
<ul> <li>Base support for feet or wheels -</li> </ul>	PNC 206367	
800mm (700/900)		
<ul> <li>Base support for feet or wheels -</li> </ul>	PNC 206368	
1200mm (700/900)		
<ul> <li>Base support for feet or wheels -</li> </ul>	PNC 206369	
1600mm (700/900)		
<ul> <li>Base support for feet or wheels -</li> </ul>	PNC 206370	
2000mm (700/900)		_
<ul> <li>Rear paneling - 600mm (700/900XP)</li> </ul>	PNC 206373	
• Rear paneling - 800mm (700/900)	PNC 206374	
- Near parieting (700/700)		
- Dograding 1000 (700 (000)	ひとし シンイズフェ	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
<ul><li>Rear paneling - 1200mm (700/900)</li><li>4 wheels, 2 swivelling with brake</li></ul>		
<ul> <li>Rear paneling - 1200mm (700/900)</li> <li>4 wheels, 2 swivelling with brake (700/900). It is mandatory to install</li> </ul>	PNC 206376	
<ul> <li>Rear paneling - 1200mm (700/900)</li> <li>4 wheels, 2 swivelling with brake (700/900). It is mandatory to install with base supports for feet/wheels</li> </ul>	PNC 206376	
<ul> <li>Rear paneling - 1200mm (700/900)</li> <li>4 wheels, 2 swivelling with brake (700/900). It is mandatory to install with base supports for feet/wheels UK</li> </ul>	PNC 206376 PNC 206382	
<ul> <li>Rear paneling - 1200mm (700/900)</li> <li>4 wheels, 2 swivelling with brake (700/900). It is mandatory to install with base supports for feet/wheels</li> </ul>	PNC 206376 PNC 206382	



• Stainless steel grid for free standing grills (700XP)	PNC 206414	
• Stainless steel grid for free standing V-shaped grills (700XP)	PNC 206415	
<ul> <li>Scraper for grids with drainage channels - top grills</li> </ul>	PNC 206421	
<ul> <li>SCRAPER FOR FREESTANDING GRILLS</li> </ul>	PNC 206422	
• BASE SUPPORT FOR FEET/WHEELS 600M	PNC 206431	
• - NOTTRANSLATED -	PNC 206462	
<ul> <li>2 side covering panels, h=700mm, d=700mm</li> </ul>	PNC 216000	
• Frontal handrail 400mm	PNC 216046	
• Frontal handrail 800mm	PNC 216047	
• Frontal handrail 1200mm	PNC 216049	
• Frontal handrail 1600mm	PNC 216050	
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
<ul> <li>Pressure regulator for gas units</li> </ul>	PNC 927225	





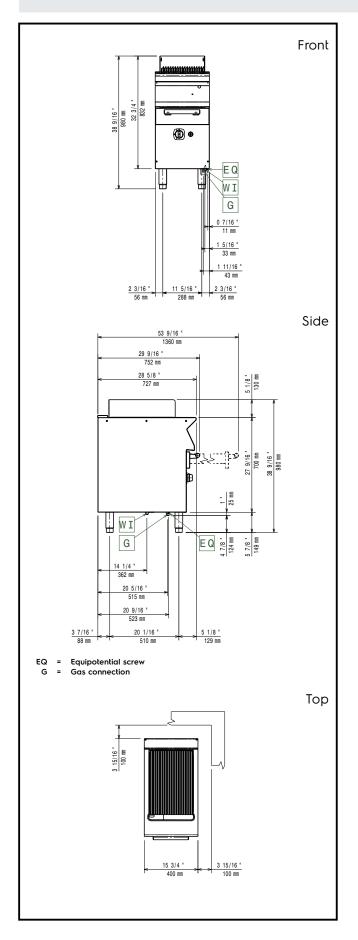

Modular Cooking Range Line 700XP Half Module Freestanding Gas Char-Grill



Gas

Gas Power: 8 kW

Natural Gas G20 (20mbar)

Standard gas delivery: (20mbar)
Gas Type Option: LPG;Town
Gas Inlet: 3/4"

### **Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight: 40 kg Shipping weight: 57 kg Shipping height: 1180 mm Shipping width: 460 mm Shipping depth: 810 mm Shipping volume: 0.44 m<sup>3</sup> Certification group: N7GG Cooking surface width: 316 mm Cooking surface depth: 478 mm

