



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371016 (E7ECEH4RE0)

4-hot plate (2,6 kW each)
electric range on electric
oven (6 kW)

371128 (E7ECEH4REN)

4-hot plate (2,6 kW each)
electric range on electric
oven (6 kW)

Short Form Specification

Item No. _____

To be installed on stainless steel feet with height adjustment up to 50 mm. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- The four round 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- Base compartment consists of an electric standard oven with thick oven door for heat insulation, positioned beneath the base plate.
- Electric oven to have separate thermostats for top and bottom heating elements.
- Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed enamelled steel oven base plate.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Oven thermostat adjustable from 100 °C to 300 °C.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐
- 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels. PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm PNC 206152 ☐
- Frontal kicking strip, 800mm (not for refr-freezer base) PNC 206176 ☐
- Frontal kicking strip, 1000mm (not for refr-freezer base) PNC 206177 ☐
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178 ☐
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179 ☐

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com


• Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers (only for 371016)	PNC 206209	☐
• 4 feet for concrete installation	PNC 206210	☐
• Pair of side kicking strips	PNC 206249	☐
• Pair of side kicking strips for concrete installation	PNC 206265	☐
• Water coulumn with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension for 700 line	PNC 206291	☐
• Chimney upstand, 800mm	PNC 206304	☐
• Right and left side handrails	PNC 206307	☐
• BACK HANDRAIL 800 MM - MARINE	PNC 206308	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Chimney grid net, 400mm	PNC 206400	☐
• 2 side covering panels, h=700mm, d=700mm	PNC 216000	☐
• Frontal handrail 800mm	PNC 216047	☐
• Frontal handrail 1200mm	PNC 216049	☐
• Frontal handrail 1600mm	PNC 216050	☐
• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• Unclogging rod for 15lt drainage pipe (only for 371128)	PNC 921695	☐

Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

Front

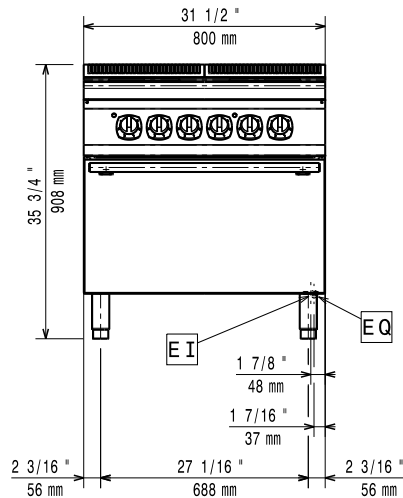


Side

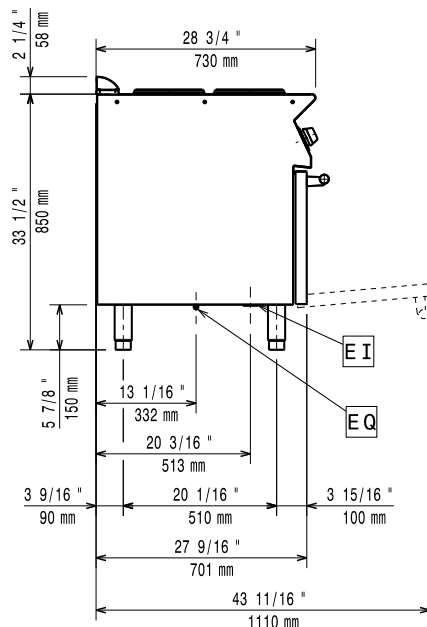

EI = Electrical inlet (power)
EQ = Equipotential screw

Top

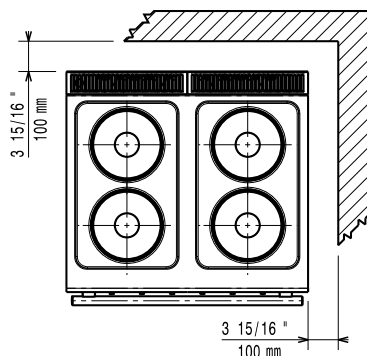

Electric

Supply voltage:

371016 (E7ECEH4RE0)	380-400 V/3 ph/50-60 Hz
371128 (E7ECEH4REN)	230 V/3 ph/50/60 Hz

Predisposed for:

Total Watts:	16.4 kW
--------------	---------

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Oven working Temperature: 100 °C MIN; 300 °C MAX

Oven Cavity Dimensions (width): 540 mm

Oven Cavity Dimensions (height): 300 mm

Oven Cavity Dimensions (depth): 650 mm

External dimensions, Width: 800 mm

External dimensions, Depth: 730 mm

External dimensions, Height: 850 mm

Net weight: 80 kg

Shipping weight: 95 kg

Shipping height: 371016 (E7ECEH4RE0) 1080 mm

371128 (E7ECEH4REN) 1140 mm

Shipping width: 820 mm

Shipping depth: 860 mm

Shipping volume: 371016 (E7ECEH4RE0) 0.76 m³

371128 (E7ECEH4REN) 0.8 m³

Certification group: 371016 (E7ECEH4RE0) EH74O

371128 (E7ECEH4REN) N7CEI

Front Plates Power: 2.6 - 2.6 kW

Back Plates Power: 2.6 - 2.6 kW

Front Plates dimensions: Ø 230 Ø 230

Back Plates dimensions: Ø 230 Ø 230