



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**371002 (E7GCGH4CG0)**

4-burner (5,5 kW each) gas  
range on gas oven (6 kW)

### Short Form Specification

#### Item No. \_\_\_\_\_

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and rib
- Oven thermostat adjustable from 110 °C to 270 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPx4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

### Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐
- Draught diverter with 150mm diameter PNC 206132 ☐
- Matching ring for flue condenser PNC 206133 ☐

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


|                                                                                                                 |            |                          |                                                                                                                       |            |                          |
|-----------------------------------------------------------------------------------------------------------------|------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels. | PNC 206135 | <input type="checkbox"/> | • KIT TOWN GAS NOZZLES (G150)- COOKERS 700                                                                            | PNC 206387 | <input type="checkbox"/> |
| • Flanged feet kit                                                                                              | PNC 206136 | <input type="checkbox"/> | • - NOT TRANSLATED -                                                                                                  | PNC 206402 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 800mm                                                        | PNC 206148 | <input type="checkbox"/> | • - NOT TRANSLATED -                                                                                                  | PNC 206460 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1000mm                                                       | PNC 206150 | <input type="checkbox"/> | • 2 side covering panels, h=700mm, d=700mm                                                                            | PNC 216000 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm                                                       | PNC 206151 | <input type="checkbox"/> | • Frontal handrail 800mm                                                                                              | PNC 216047 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                                                       | PNC 206152 | <input type="checkbox"/> | • Frontal handrail 1200mm                                                                                             | PNC 216049 | <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                                                      | PNC 206176 | <input type="checkbox"/> | • Frontal handrail 1600mm                                                                                             | PNC 216050 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                                                     | PNC 206177 | <input type="checkbox"/> | • Large handrail - portioning shelf, 800mm                                                                            | PNC 216186 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                                                     | PNC 206178 | <input type="checkbox"/> | • Universal frying pan with stainless steel handle (diam. 240mm) suitable for induction and all other heating sources | PNC 653597 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                                                     | PNC 206179 | <input type="checkbox"/> | • Pressure regulator for gas units                                                                                    | PNC 927225 | <input type="checkbox"/> |
| • 4 feet for concrete installation                                                                              | PNC 206210 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Flue condenser for 1 module, 150 mm diameter                                                                  | PNC 206246 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Pair of side kicking strips                                                                                   | PNC 206249 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Single burner smooth plate for direct cooking - fits frontal burners only                                     | PNC 206260 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Single burner ribbed plate for direct cooking- fits frontal burners only                                      | PNC 206261 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Single burner radiant plate for pan support                                                                   | PNC 206264 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Pair of side kicking strips for concrete installation                                                         | PNC 206265 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Water coulum with swivel arm (water column extension not included)                                            | PNC 206289 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Water column extension for 700 line                                                                           | PNC 206291 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Stainless steel double grid for 2 burners                                                                     | PNC 206297 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Chimney upstand, 800mm                                                                                        | PNC 206304 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Right and left side handrails                                                                                 | PNC 206307 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • BACK HANDRAIL 800 MM - MARINE                                                                                 | PNC 206308 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Wok pan support for open burners (700/900)                                                                    | PNC 206363 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Base support for feet or wheels - 800mm (700/900)                                                             | PNC 206367 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Base support for feet or wheels - 1200mm (700/900)                                                            | PNC 206368 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Base support for feet or wheels - 1600mm (700/900)                                                            | PNC 206369 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Base support for feet or wheels - 2000mm (700/900)                                                            | PNC 206370 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Rear paneling - 800mm (700/900)                                                                               | PNC 206374 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Rear paneling - 1000mm (700/900)                                                                              | PNC 206375 | <input type="checkbox"/> |                                                                                                                       |            |                          |
| • Rear paneling - 1200mm (700/900)                                                                              | PNC 206376 | <input type="checkbox"/> |                                                                                                                       |            |                          |




**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

Front

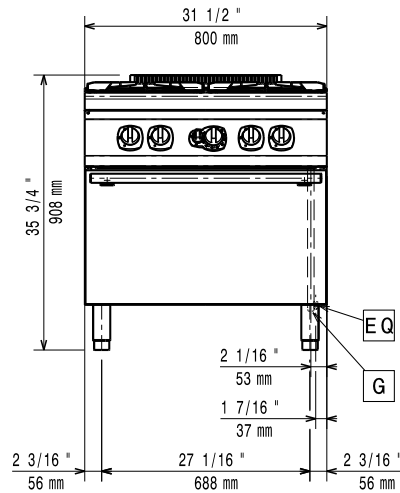


Side

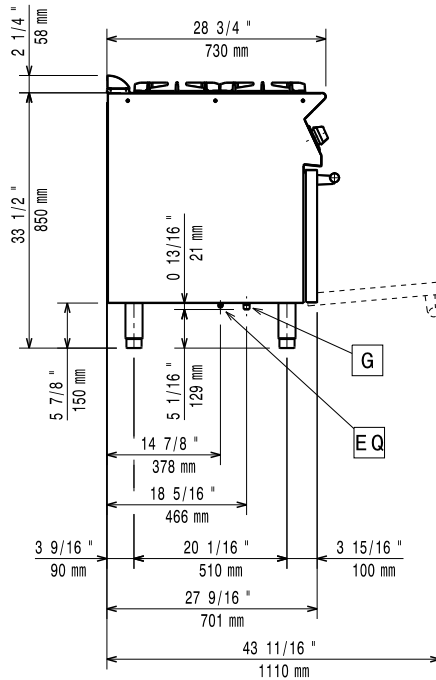

G = Gas connection

Top

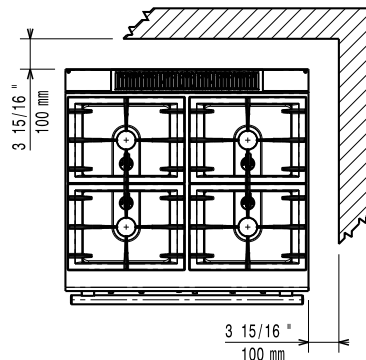

### Gas

|                        |                          |
|------------------------|--------------------------|
| Gas Power:             | 28 kW                    |
| Standard gas delivery: | Natural Gas G20 (20mbar) |
| Gas Type Option:       | LPG;Town                 |
| Gas Inlet:             | 1/2"                     |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Oven working Temperature:** 110 °C MIN; 270 °C MAX

**Oven Cavity Dimensions (width):** 540 mm

**Oven Cavity Dimensions (height):** 300 mm

**Oven Cavity Dimensions (depth):** 650 mm

**External dimensions, Width:** 800 mm

**External dimensions, Depth:** 730 mm

**External dimensions, Height:** 850 mm

**Net weight:** 80 kg

**Shipping weight:** 100 kg

**Shipping height:** 1080 mm

**Shipping width:** 820 mm

**Shipping depth:** 860 mm

**Shipping volume:** 0.76 m<sup>3</sup>

**Front Burners Power:** 5.5 - 5.5 kW

**Back Burners Power:** 5.5 - 5.5 kW

**Certification group:** N7CG

**Back Burners Dimension - mm** Ø 60 Ø 60

**Front Burners Dimension - mm** Ø 60 Ø 60



Modular Cooking Range Line  
700XP 4-Burner Gas Range on Gas Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.21